www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

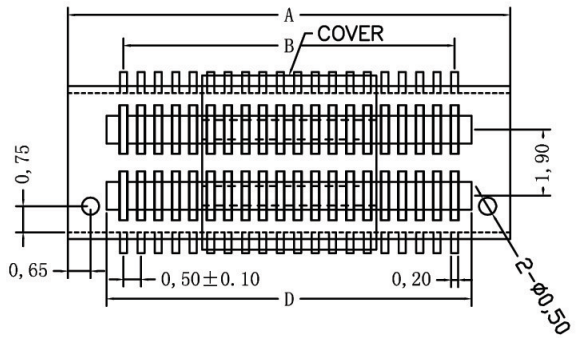

ASSEMBLY



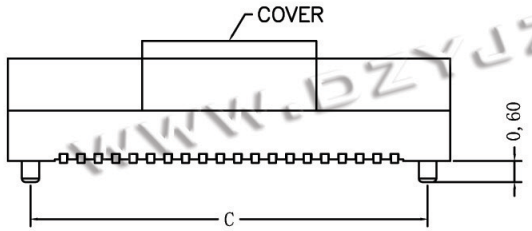



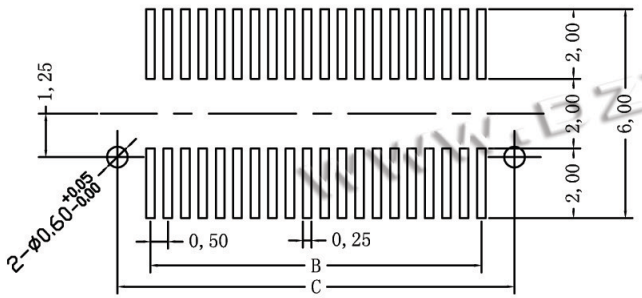

P.C.B PATTEN

High photosynthesis (H)	The female seat height (H1)	The male seat height (H2)	Insertion height (H3)
3.0	2.2	0.8	1.6
3.5	2.2	1.3	1.6
4.0	3.0	1.0	1.9
4.5	3.5	1.0	1.9
5.0	3.0/4.0	2.0/1.0	1.9
5.5	3.5/4.5	2.0/1.0	1.9
6.0	4.0	2.0	1.9
6.5	4.5	2.0	1.9
7.0	3.0	4.0	1.9
7.5	3.5	4.0	1.9
8.0	4.0	4.0	1.9
8.5	4.5	4.0	1.9

NO. of Contacts	Dimension(mm) A±0.10	B±0.10	C±0.10	D±0.10
8	4.70	1.50	3.40	2.48
10	5.20	2.00	3.90	2.98
12	5.70	2.50	4.40	3.48
14	6.20	3.00	4.90	3.98
16	6.70	3.50	5.40	4.48
18	7.20	4.00	5.90	4.98
20	7.70	4.50	6.40	5.48
22	8.20	5.00	6.90	5.98
24	8.70	5.50	7.40	6.48
26	9.20	6.00	7.90	6.98
28	9.70	6.50	8.40	7.48
30	10.20	7.00	8.90	7.98
32	10.70	7.50	9.40	8.48
34	11.20	8.00	9.90	8.98
36	11.70	8.50	10.40	9.48
38暂无	12.20	9.00	10.90	9.98
40	12.70	9.50	11.40	10.48
42	13.20	10.00	11.90	10.98
44	13.70	10.50	12.40	11.48
46	14.20	11.00	12.90	11.98
48	14.70	11.50	13.40	12.48
50	15.20	12.00	13.90	12.98
52	15.70	12.50	14.40	13.48
54暂无	16.20	13.00	14.90	13.98
56暂无	16.70	13.50	15.40	14.48
58暂无	17.20	14.00	15.90	14.98
60	17.70	14.50	16.40	15.48
62暂无	18.20	15.00	16.90	15.98
64暂无	18.70	15.50	17.40	16.48
66暂无	19.20	16.00	17.90	16.98
68暂无	19.70	16.50	18.40	17.48
70	20.20	17.00	18.90	17.98
72暂无	20.70	17.50	19.40	18.48
74暂无	21.20	18.00	19.90	18.98
76暂无	21.70	18.50	20.40	19.48
78暂无	22.20	19.00	20.90	19.98
80	22.70	19.50	21.40	20.48
82暂无	23.20	20.00	21.90	20.98
84暂无	23.70	20.50	22.40	21.48
86暂无	24.20	21.00	22.90	21.98
88暂无	24.70	21.50	23.40	22.48
90暂无	25.20	22.00	23.90	22.98
92暂无	25.70	22.50	24.40	23.48
94暂无	26.20	23.00	24.90	23.98
96暂无	26.70	23.50	25.40	24.48
98暂无	27.20	24.00	25.90	24.98
100	27.70	24.50	26.40	25.48

Electrical:
Vlotag Rating:50V AC(rms)/DC
Current Rating:0.5A AC(rms)/DC
Contact Resistance:50mΩ Max
Insulation Resistance:100MΩ min
Dlelectric Withstanding Voltage:200V AC r.m.s
Operting Temperature:-30℃~+80℃
Materirls
Housing:High Temperature Plastic UL94V-0
Terminal:Copper Alloy
Material:PA9T
Contact:phosphor Bronae,Gold Plating;

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2', X.X' ±0.5'	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 0.5PH 双槽BTB 母座 立贴式带柱
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC40F-BTB2XN-XXX
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
SCALE:1:1 SIZE: A4			DRAW NO: HYC-2308021616
			SHEET NO. 1 OF 1

www.dzyjzj.com

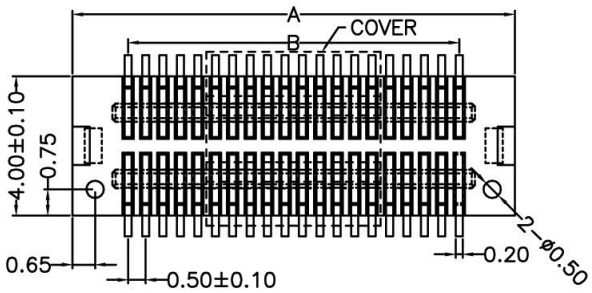

ASSEMBLY



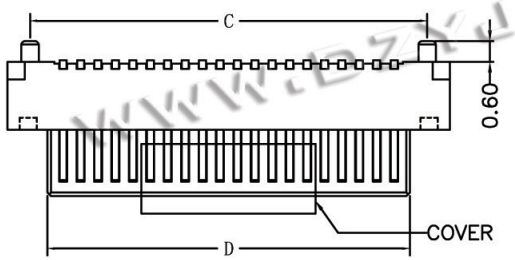



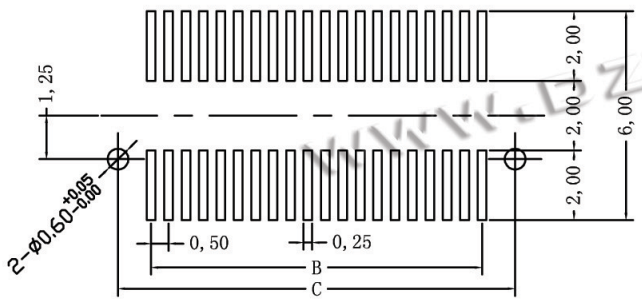

P.C.B PATTEN

High photosynthesis (H)	The female seat height (H1)	The male seat height (H2)	Insertion height (H3)
3.0	2.2	0.8	1.6
3.5	2.2	1.3	1.6
4.0	3.0	1.0	1.9
4.5	3.5	1.0	1.9
5.0	3.0/4.0	2.0/1.0	1.9
5.5	3.5/4.5	2.0/1.0	1.9
6.0	4.0	2.0	1.9
6.5	4.5	2.0	1.9
7.0	3.0	4.0	1.9
7.5	3.5	4.0	1.9
8.0	4.0	4.0	1.9
8.5	4.5	4.0	1.9

NO. of Contacts	Dimension(mm) A±0.10	B±0.10	C±0.10	D±0.10
8	4.70	1.50	3.40	2.40
10	5.20	2.00	3.90	2.90
12	5.70	2.50	4.40	3.40
14	6.20	3.00	4.90	3.90
16	6.70	3.50	5.40	4.40
18	7.20	4.00	5.90	4.90
20	7.70	4.50	6.40	5.40
22	8.20	5.00	6.90	5.90
24	8.70	5.50	7.40	6.40
26	9.20	6.00	7.90	6.90
28	9.70	6.50	8.40	7.40
30	10.20	7.00	8.90	7.90
32	10.70	7.50	9.40	8.40
34	11.20	8.00	9.90	8.90
36	11.70	8.50	10.40	9.40
38 暂无	12.20	9.00	10.90	9.90
40	12.70	9.50	11.40	10.40
42	13.20	10.00	11.90	10.90
44	13.70	10.50	12.40	11.40
46	14.20	11.00	12.90	11.90
48	14.70	11.50	13.40	12.40
50	15.20	12.00	13.90	12.90
52	15.70	12.50	14.40	13.40
54 暂无	16.20	13.00	14.90	13.90
56 暂无	16.70	13.50	15.40	14.40
58 暂无	17.20	14.00	15.90	14.90
60	17.70	14.50	16.40	15.40
62 暂无	18.20	15.00	16.90	15.90
64 暂无	18.70	15.50	17.40	16.40
66 暂无	19.20	16.00	17.90	16.90
68 暂无	19.70	16.50	18.40	17.40
70	20.20	17.00	18.90	17.90
72 暂无	20.70	17.50	19.40	18.40
74 暂无	21.20	18.00	19.90	18.90
76 暂无	21.70	18.50	20.40	19.40
78 暂无	22.20	19.00	20.90	19.90
80	22.70	19.50	21.40	20.40
82 暂无	23.20	20.00	21.90	20.90
84 暂无	23.70	20.50	22.40	21.40
86 暂无	24.20	21.00	22.90	21.90
88 暂无	24.70	21.50	23.40	22.40
90 暂无	25.20	22.00	23.90	22.90
92 暂无	25.70	22.50	24.40	23.40
94 暂无	26.20	23.00	24.90	23.90
96 暂无	26.70	23.50	25.40	24.40
98 暂无	27.20	24.00	25.90	24.90
100	27.70	24.50	26.40	25.40

Electrical:
Vlotag Rating:50V AC(rms)/DC
Current Rating:0.5A AC(rms)/DC
Contact Resistance:50mΩ Max
Insulation Resistance:100MΩ min
Dlelectric Withstanding Voltage:200V AC r.m.s
Operting Temperature:-30℃~+80℃
Materirls
Housing:High Temperature Plastic UL94V-0
Terminal:Copper Alloy
Material:PA9T
Contact:phosphor Bronae,Gold Plating;

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X' ±0.5'	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: 0.5PH 双槽BTB 公座 立贴式带柱
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC40M-BTB2XN-XXX
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE: 2014-02-23	MOLD NO.
SCALE:1:1 SIZE: A4			DRAW NO: HYC-2308021617
			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM