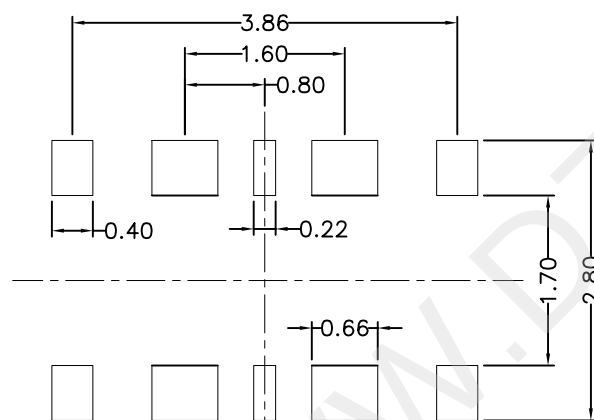
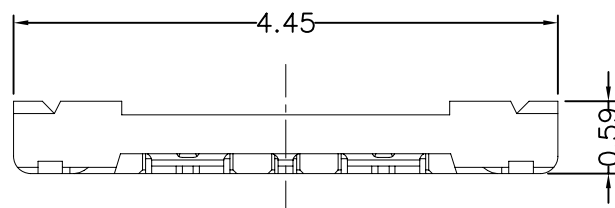
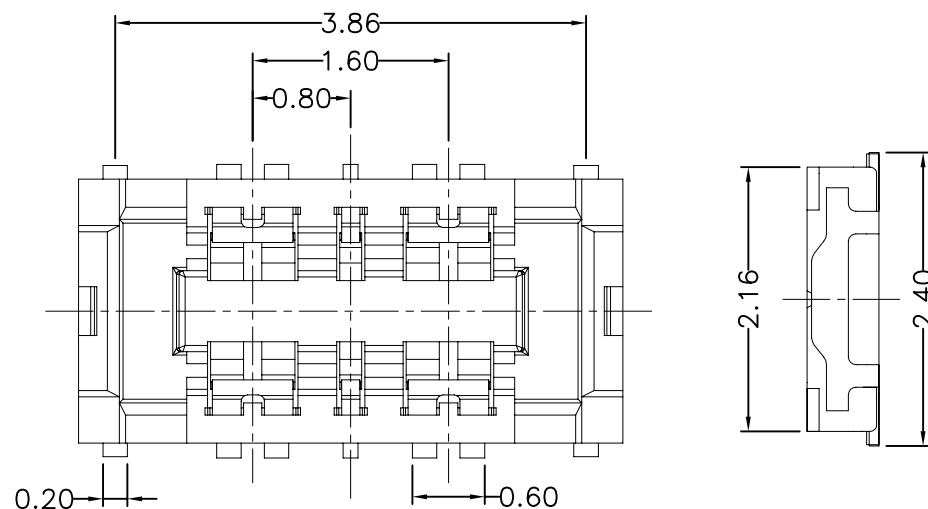


RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/3A AC;
- 2.WITHSTANDING VOLTAGE: 150V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 1000M Ω MIN;
- 4.CONTACT RESISTANCE: 100m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;
- 3.METAL FITTINGS: COPPER ALLOY.




PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 50 μ " MIN. OVER ALL;
- 2.METAL FITTINGS: TIN 100 μ " MIN. OVER NICKEL 50 μ "MIN.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2^\circ$ X.X" $\pm 0.5^\circ$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 0.8PH BTB SOCKET H0.6	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC2F-BTB10-060	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-202012291223	SHEET NO. 1 OF 1

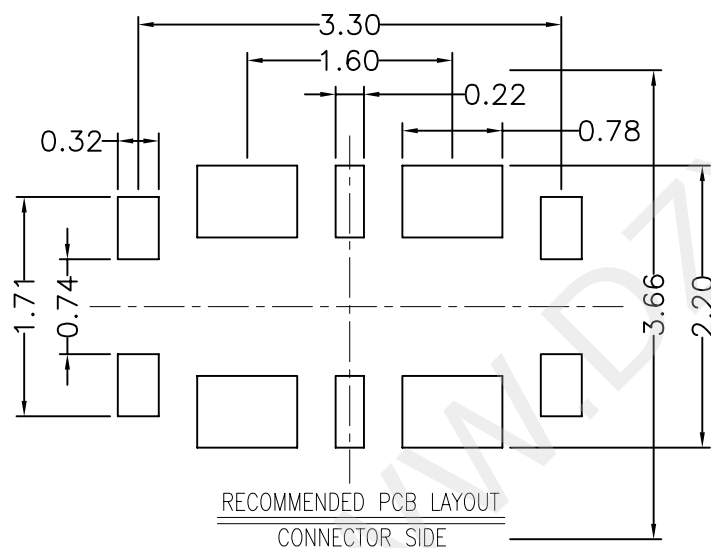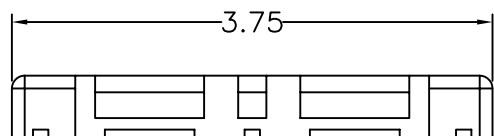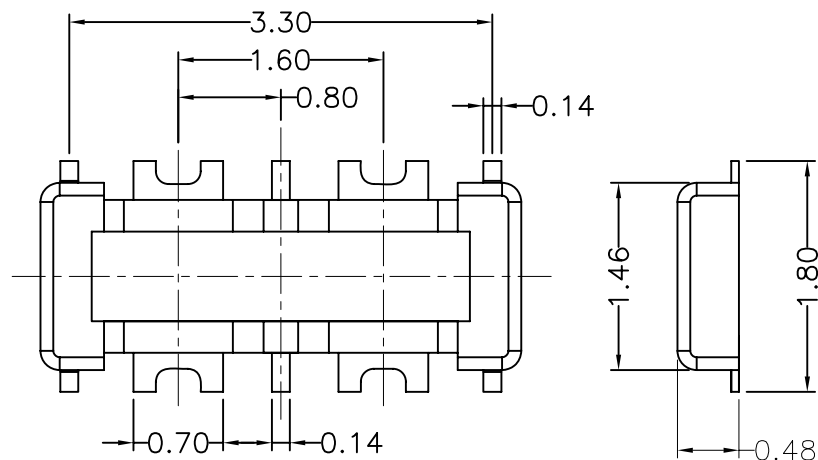

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/3A AC;
- 2.WITHSTANDING VOLTAGE: 150V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 1000M Ω MIN;
- 4.CONTACT RESISTANCE: 100m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;
- 3.METAL FITTINGS: COPPER ALLOY.

PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 50u" MIN. OVER ALL;
- 2.METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2^\circ$ X.X" $\pm 0.5^\circ$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 0.8PH BTB HEADER H0.6	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC1M-BTB10-060	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-202012291223	SHEET NO. 1 OF 1