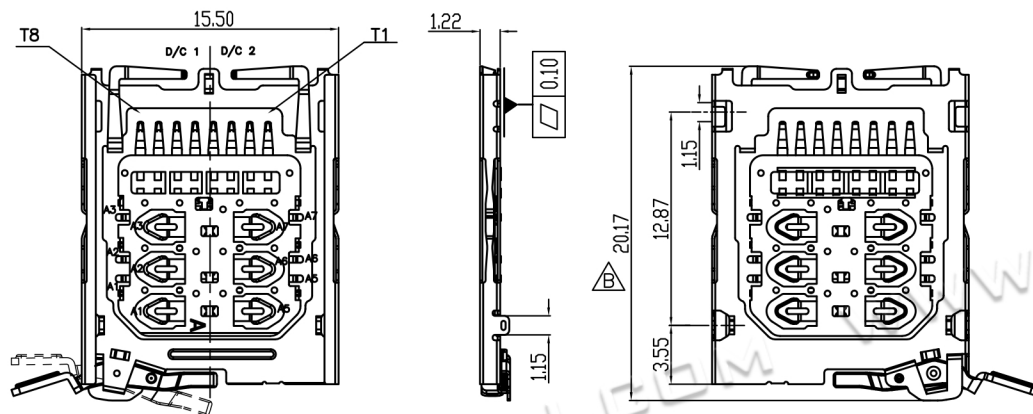


SD P/N	PIN Assignmeng.
T1	DAT2
T2	CD/DAT3
T3	CMD
T4	VDD
T5	CLK
T6	VSS
T7	DAT0
T8	DAT1

SIM P/N	PIN NAME
A1	Supply Voltage Vcc
A2	Reset (RST)
A3	Clock (CLK)
A5	Ground
A6	Programing Voltage Vpp
A7	I/O
C/D1	DETECT
C/D2	DETECT

NOTES:

1. MATERIAL:

1-1.SHELL: STAINLESS STEEL; 1-2.CONTACT: COPPER ALLOY.

1-3.HOUSING: THERMOPLASTIC,UL94V-0,COLOR:BLACK

2. FINISH:

2-1.CONTACT:GOLD PLATING ON CONTACT AREA AND SOLDER TAILS AREA , 50u" MIN. NICKEL UNDERPLATING OVER ALL.

2-2.SHELL: GOLD PLATING ON SOLDER TAILS AREA,NICKEL PLATING OVER ALL.

3. PRODUCT SPECIFICATIONS:


3-1.DURABILITY: 1000 CYCLES ;

3-3.VOLTAGE RATING: 5V ;


3-5.CONTACT RESISTANCE: 50 MILL.OHM MAX

T-FLASH CARD

NANO CARD

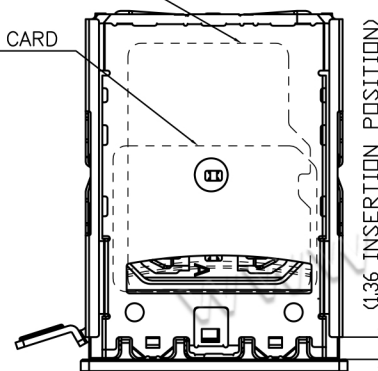

PUSH IN

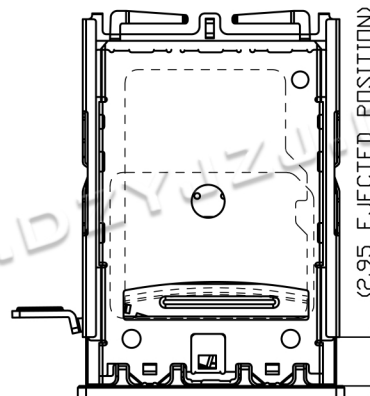

PUSH OUT



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.X' ±2" X.X' ±0.5"

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

1.25H 二选一卡座 (NANO CARD OR TF CARD)

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC59-21N117-125

APPROVED BY:

邱敏

DATE :


2014-02-23

DRAW NO:

HYC-2012241104






SHEET NO.

1 OF 1



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

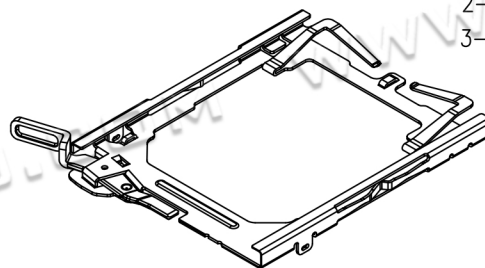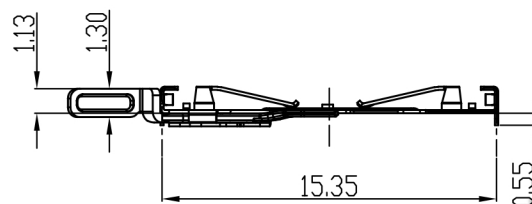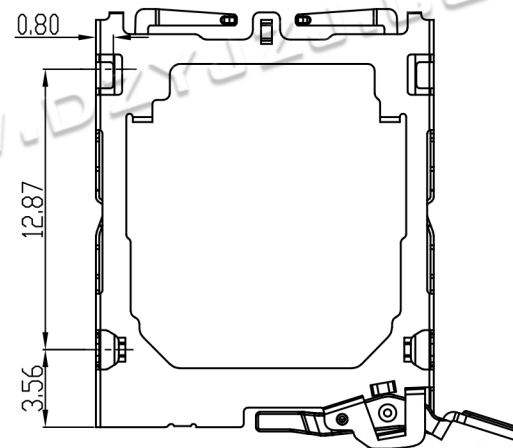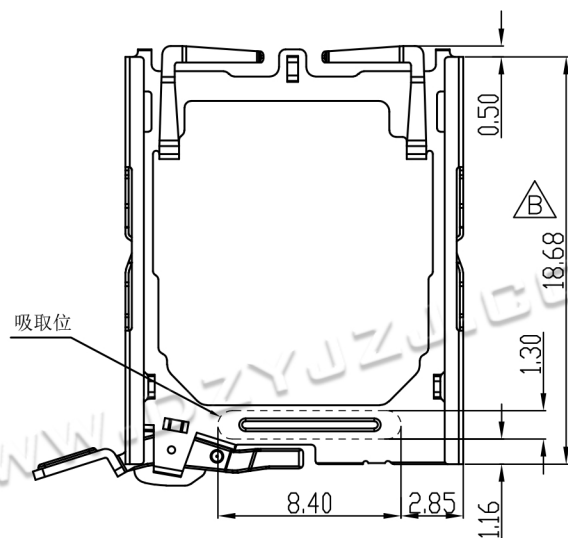

NOTES:

- 1-1.SHELL: STAINLESS STEEL;
- 2-1.SHELL: GOLD PLATING ON SOLDER TAILS AREA,
- 3-1.DURABILITY: 1000 CYCLES.



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X.' ±2' X.X' ±0.5'



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

1.25H 二选一卡座 卡框

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NO.

HYC59-21N117-125-K



MOLD NO.

DRAW NO:

HYC-2012241104

SHEET NO.

1 OF 1

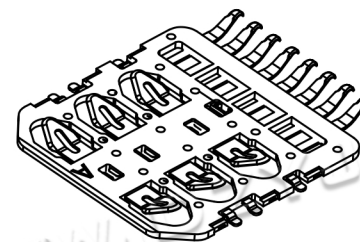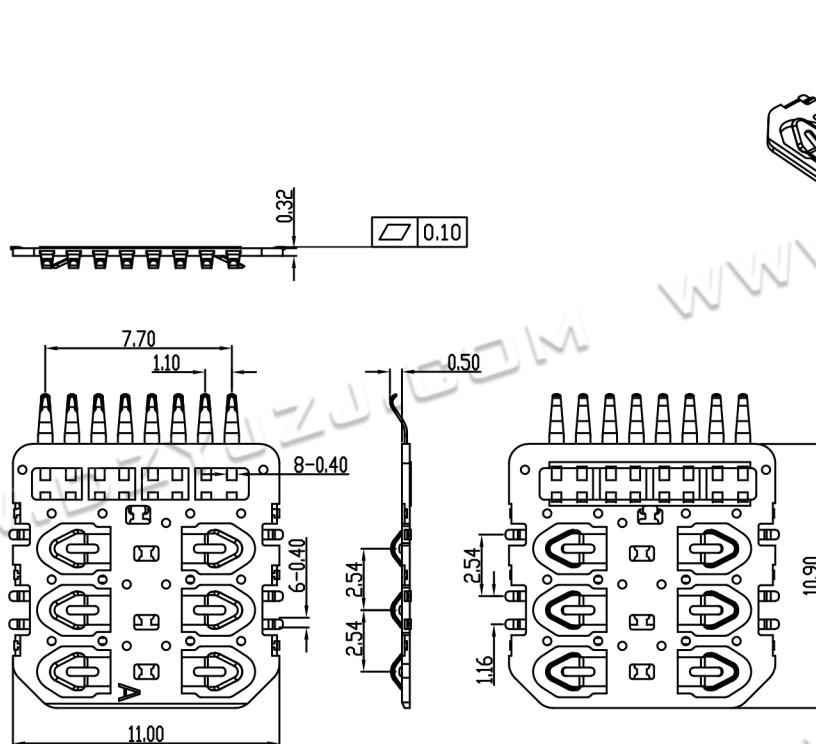

NOTES:

1. MATERIAL:

1-1.HOUSING: THERMOPLASTIC,UL94V-0,COLOR:BLACK

2. FINISH:

2-1.CONTACT:GOLD PLATING ON CONTACT AREA
AND SOLDER TAILS AREA , 50u" MIN.
NICKEL UNDERPLATING OVER ALL.

3. PRODUCT SPECIFICATIONS:

3-1.DURABILITY: 1000 CYCLES

3-2.CURRENT RATING: 0.5A

3-3.VOLTAGE RATING: 5V

3-4.INSULATION RESISTANCE: 1000 MEG.OHM MIN

3-5.CONTACT RESISTANCE: 50 MILL.OHM MAX

3-6.DIELECTRIC WITHSTANDING VOLTAGE: 100V AC.

3-7.OPERATION TEMPERATURE: -40° TO +85°




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X.* ±2" X.X* ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

1.25H 二选一张座 卡芯

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC59-21N117-125-S

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2012241104

SHEET NO.

1 OF 1