
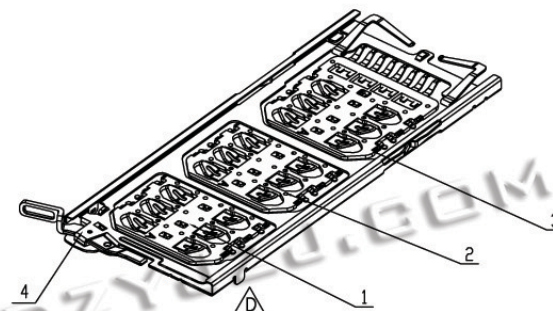


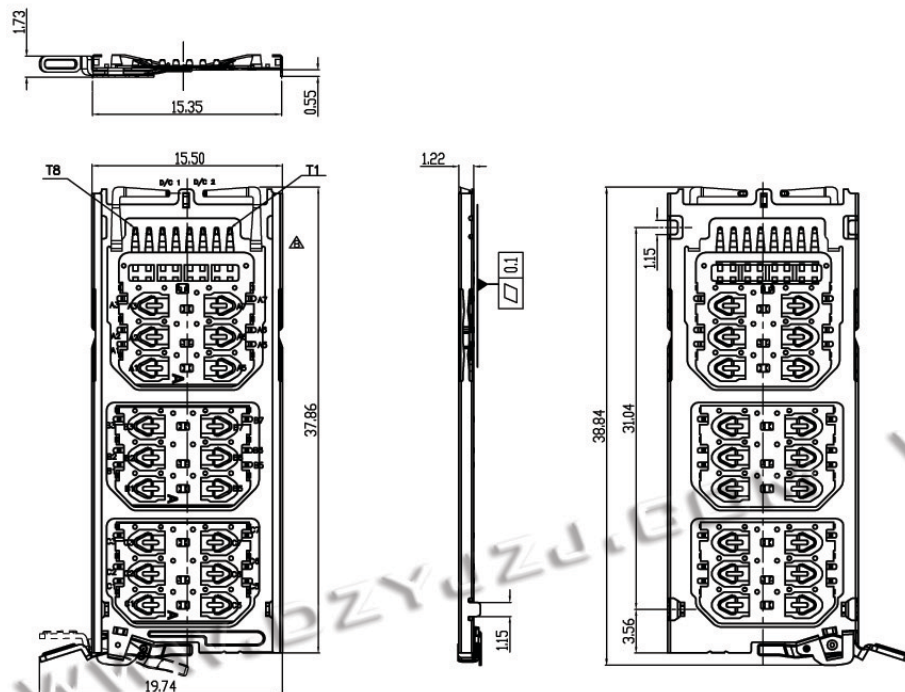

SD P/N	PIN Assignment	MICRO SIM P/N	PIN NAME
T1	DAT2	A1/B1/C1	Supply Voltage Vcc
T2	CD/DAT3	A2/B2/C2	Reset (RST)
T3	CMD	A3/B3/C3	Clock (CLK)
T4	VDD	A5/B5/C5	Ground
T5	CLK	A6/B6/C6	Programming Voltage Vpp
T6	VSS	A7/B7/C7	I/O
T7	DAT0	C/D1	DETECT
T8	DAT1	C/D2	DETECT

NOTES:

1. MATERIAL:

1-1.SHELL: STAINLESS STEEL; 1-2.CONTACT: COPPER ALLOY.

1-3.HOUSING: THERMOPLASTIC,UL94V-0,COLOR:BLACK

2. FINISH:

2-1.CONTACT:GOLD PLATING ON CONTACT AREA AND SOLDER TAILS AREA , 50u" MIN. NICKEL UNDERPLATING OVER ALL.

2-2.SHELL: GOLD PLATING ON SOLDER TAILS AREA,NICKEL PLATING OVER ALL.


3. PRODUCT SPECIFICATIONS:

3-1.DURABILITY: 1000 CYCLES ; 3-2.CURRENT RATING: 0.5A

3-3.VOLTAGE RATING: 5V ;


3-4.INSULATION RESISTANCE: 1000 MEG.OHM MIN

3-5.CONTACT RESISTANCE: 50 MILL.OHM MAX

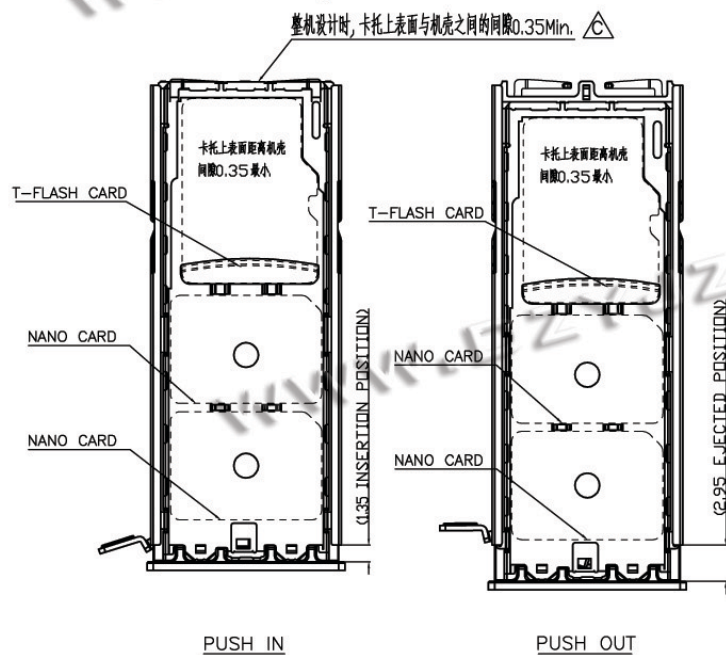

深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:1.25H 四选三组合式卡座 (THREE NANO OR DUAL NANO+TF CARD)
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC70-4IN126-125
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO: HYC-2111120925
			SHEET NO. 1 OF 1

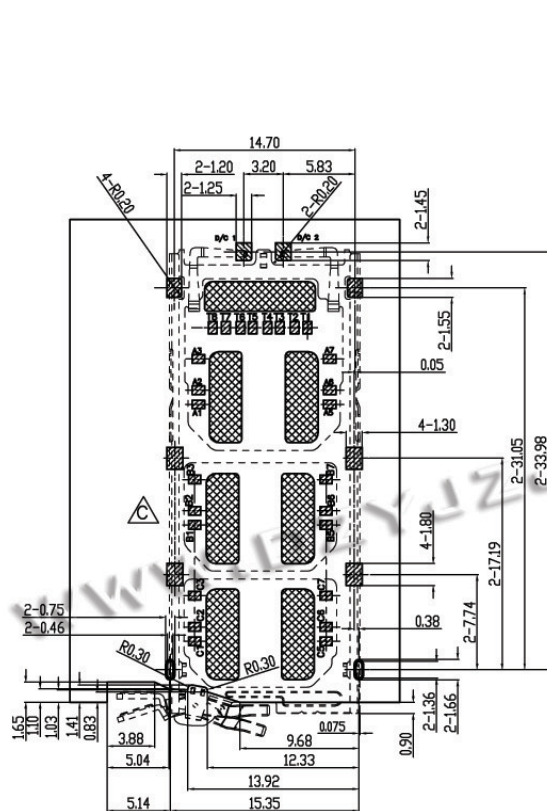

RECOMMENDED PCB LAYOUT(TOLERANCE ± 0.05)


RECOMMENDED METAL MASK T=0.12mm SCALE: 1:1

 D/C  PAD AREA  NO CIKUIT AREA (TOP VIEW)

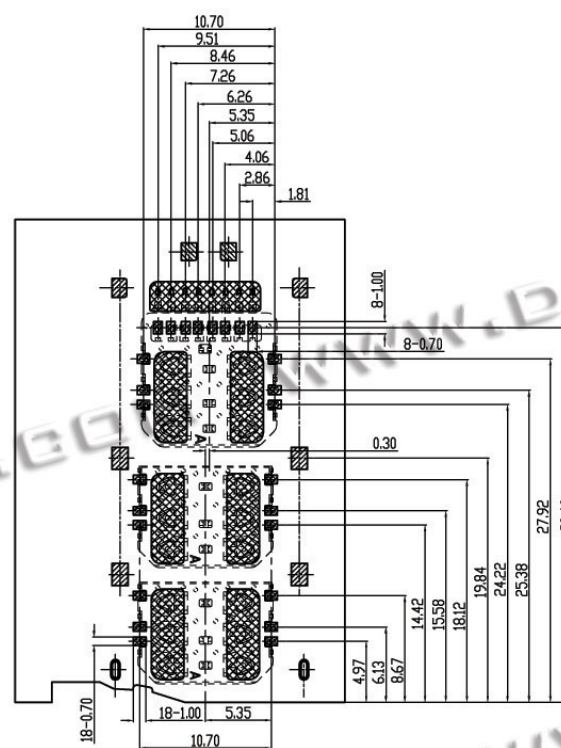

RECOMMENDED PCB LAYOUT(TOLERANCE ± 0.05)
RECOMMENDED METAL MASK T=0.12mm SCALE: 1:1

 D/C PAD AREA NO CIKUIT AREA (TOP VIEW)

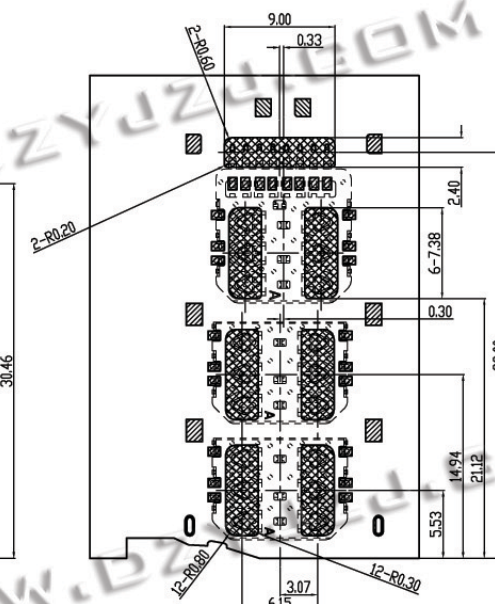


RECOMMENDED PCB LAYOUT(TOLERANCE ± 0.05)



RECOMMENDED METAL MASK T=0.12mm SCALE: 1:1

 D/C PAD AREA NO CIKUIT AREA (TOP VIEW)



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 1.25H 四选三组合式卡座 (THREE NANO OR DUAL NANO+TF CARD)	
X.X ±0.30				PART NO. HVC70-4IN126-125	MOLD NO.
X.XX ±0.25					
X.XXX ±0.15					
X.* ±2* X.X* ±0.5*		CHECKED BY:	DATE :		
		马跃	2014-02-23		
UNIT: mm [inch]		APPROVED BY:	DATE :	DRAW NO:	HVC-2111120925
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1

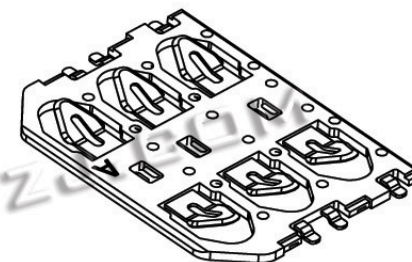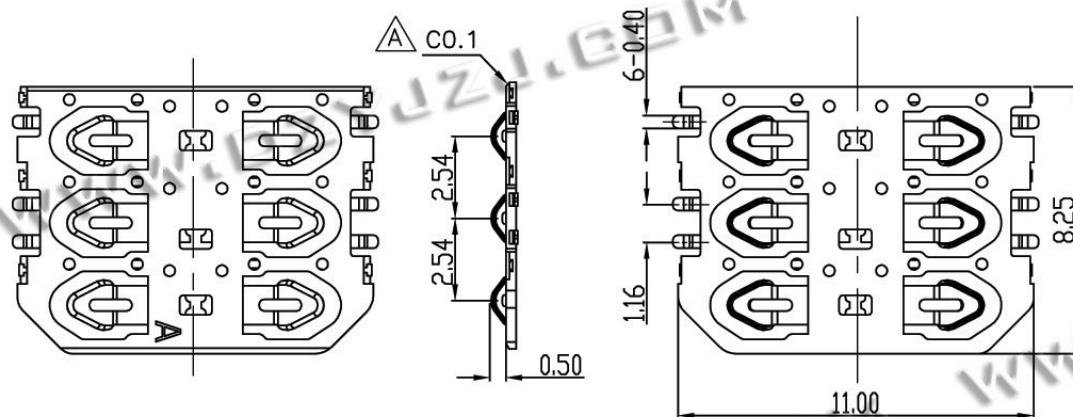




NOTES:

1. MATERIAL:
1-1.HOUSING: THERMOPLASTIC,UL94V-0,COLOR:BLACK
2. FINISH:
2-1.CONTACT:GOLD PLATING ON CONTACT AREA
AND SOLDER TAILS AREA , 50u" MIN.
NICKEL UNDERPLATING OVER ALL.
3. PRODUCT SPECIFICATIONS:
3-1.DURABILITY: 1000 CYCLES
3-2.CURRENT RATING: 0.5A
3-3.VOLTAGE RATING: 5V
3-4.INSULATION RESISTANCE: 1000 MEG.OHM MIN
3-5.CONTACT RESISTANCE: 50 MILL.OHM MAX
3-6.DIELECTRIC WITHSTANDING VOLTAGE: 100V AC.
3-7.OPERATION TEMPERATURE: -40° TO +85°



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2° X.X' ±0.5°		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 1. 25H 四选三组合式卡座 卡芯	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC70-4IN126-125
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2111120925
				SHEET NO.	1 OF 1

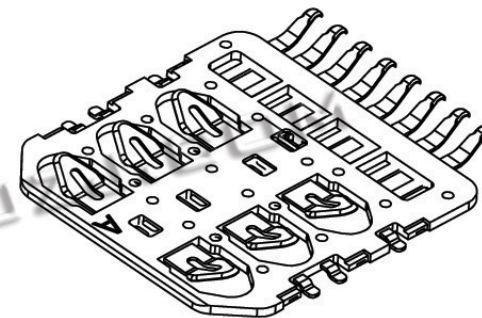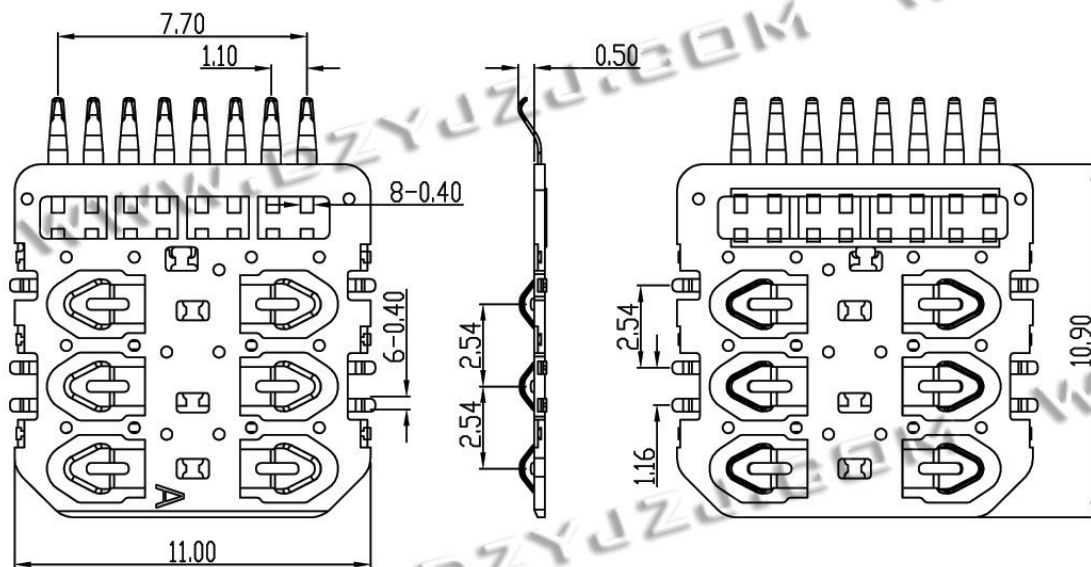

NOTES:

1. MATERIAL:

1-1.HOUSING: THERMOPLASTIC,UL94V-0,COLOR:BLACK

2. FINISH:

2-1.CONTACT:GOLD PLATING ON CONTACT AREA
AND SOLDER TAILS AREA , 50u" MIN.
NICKEL UNDERPLATING OVER ALL.

3. PRODUCT SPECIFICATIONS:

3-1.DURABILITY: 1000 CYCLES

3-2.CURRENT RATING: 0.5A

3-3.VOLTAGE RATING: 5V

3-4.INSULATION RESISTANCE: 1000 MEG.OHM MIN

3-5.CONTACT RESISTANCE: 50 MILL.OHM MAX

3-6.DIELECTRIC WITHSTANDING VOLTAGE: 100V AC.

3-7.OPERATION TEMPERATURE: -40° TO +85°



深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

1. 25H 四选三组合式卡座 卡芯

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC70-4IN126-125

MOLD NO.

APPROVED BY:

邱敏

DATE :


2014-02-23

DRAW NO:

HYC-2111120925

SHEET NO.

1 OF 1

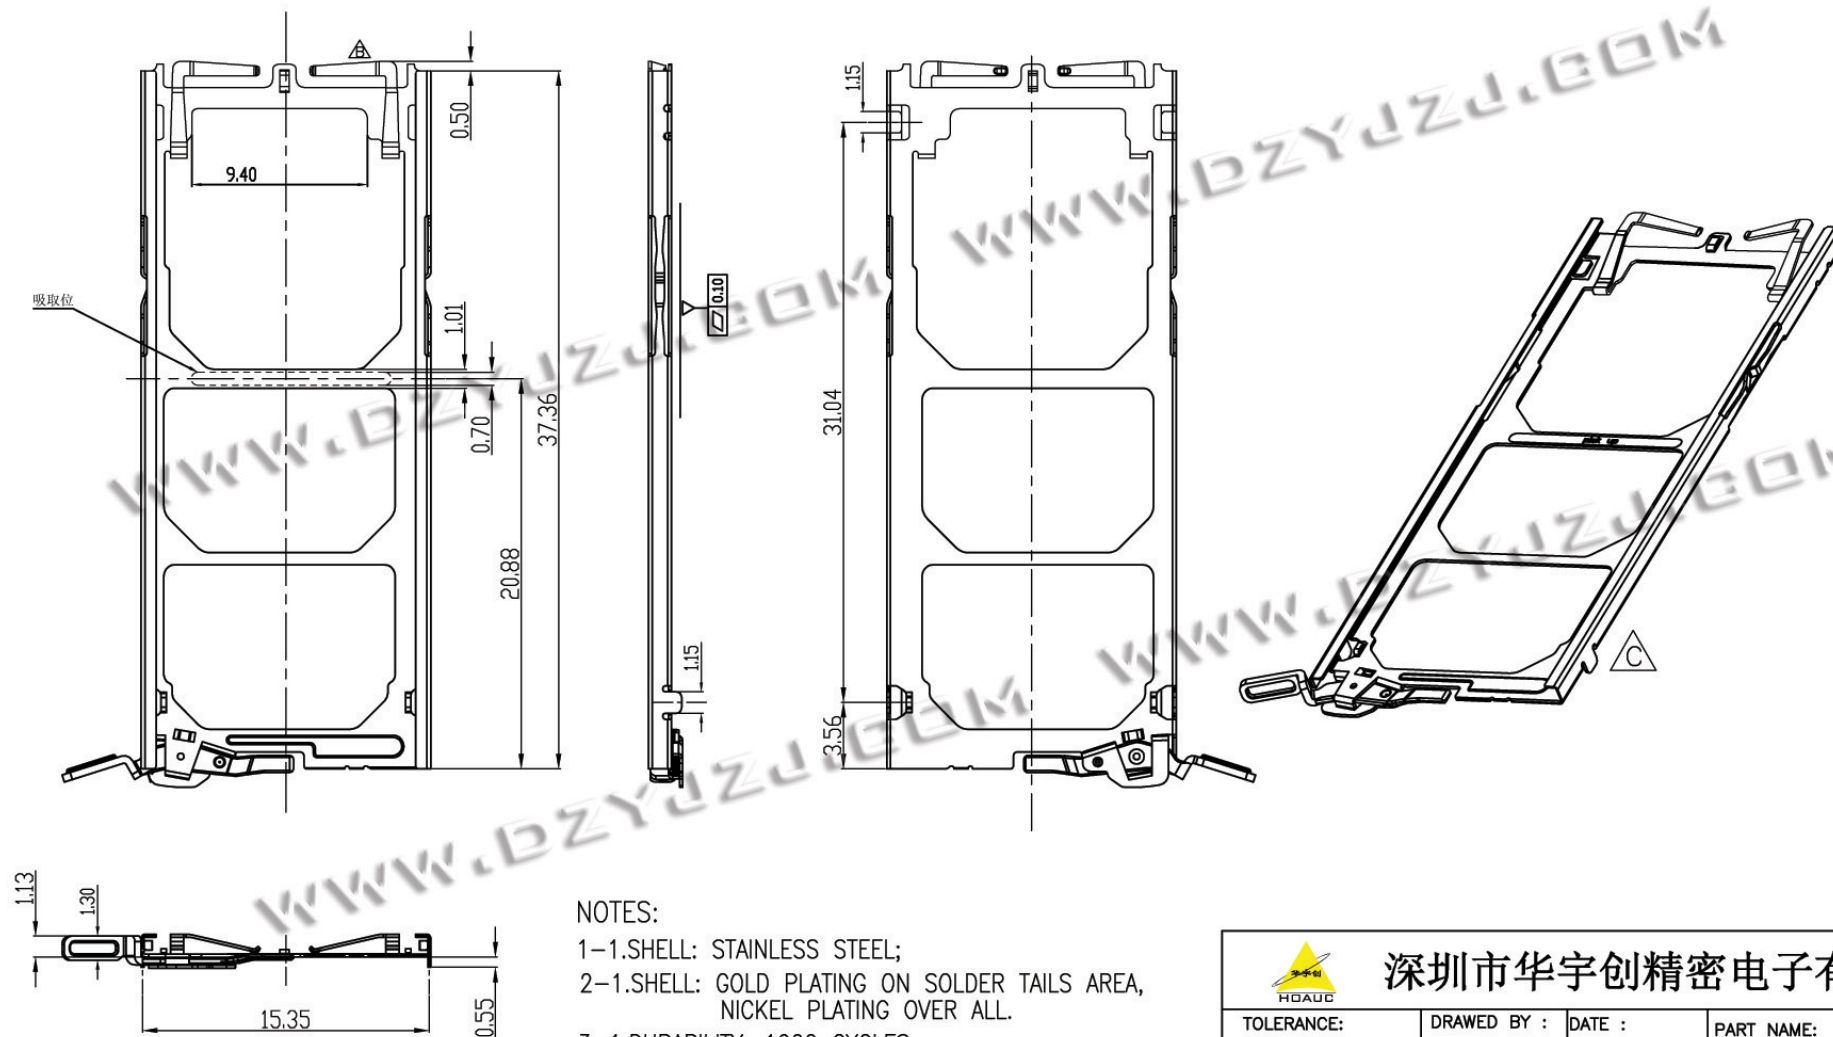

NOTES:

- 1-1.SHELL: STAINLESS STEEL;
- 2-1.SHELL: GOLD PLATING ON SOLDER TAILS AREA, NICKEL PLATING OVER ALL.
- 3-1.DURABILITY: 1000 CYCLES.

 深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2° X.X' ±0.5°	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 1. 25H 四选三组合式卡座 卡框
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC70-4IN126-125
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO: HYC-2111120925
			SHEET NO. 1 OF 1