
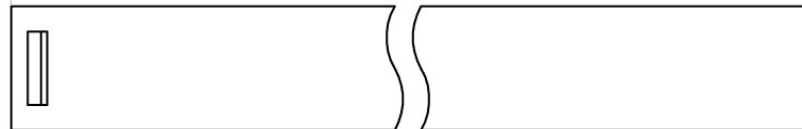
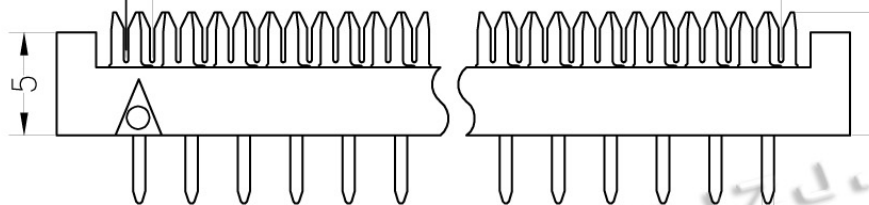



$2.54 \times \text{No. of Positions} + 5.45 \pm 0.25$  $1.27 \times \text{No. of Contacts} - 1.27 \pm 0.20$ 1.27 ± 0.1 5.97 ± 0.25  2.54 ± 0.1 $2.54 \times (N-1) \text{ Positions} \pm 0.20$ 

SPECIFICATIONS

Rated Current: 3.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40°C to +105°C

Contact Material: Brass/Phosphor Bronze

Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PBT

Max. Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

CHECKED BY:

马跃

DATE:

2014-02-23

APPROVED BY:

邱敏

DATE:

2014-02-23

PART NAME:

2.54 DIP Npin two type

PART NO.

HYC11-JN2XN-254

MOLD NO.

DRAW NO:

HYC-1906191604

SHEET NO.

1 OF 1