


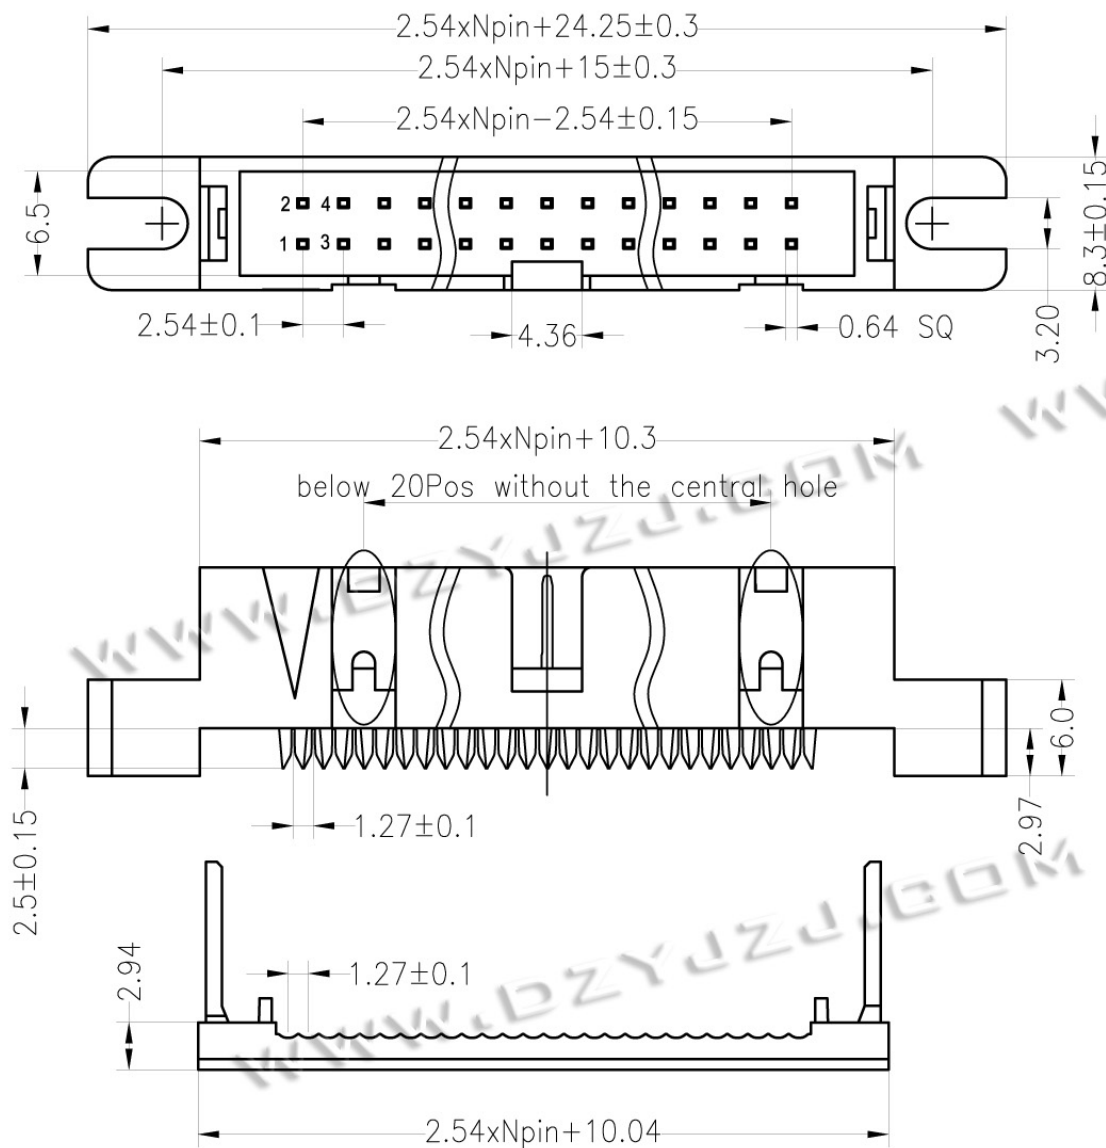

SPECIFICATIONS

Rated Current: 3.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PBT

Max. Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

2.54压排式简牛 有耳

CHECKED BY:

马跃

DATE:

2014-02-23

PART NO.

HYC10-JN2XN-254

MOLD NO.

APPROVED BY:

邱敏

DATE:

2014-02-23

DRAW NO:

HYC-1906191601

SHEET NO.

1 OF 1