

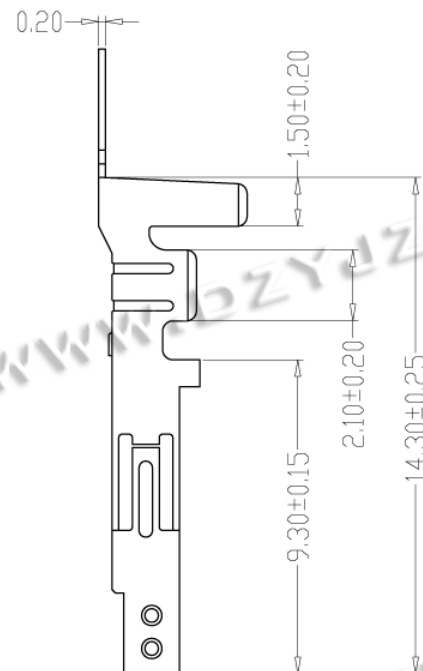
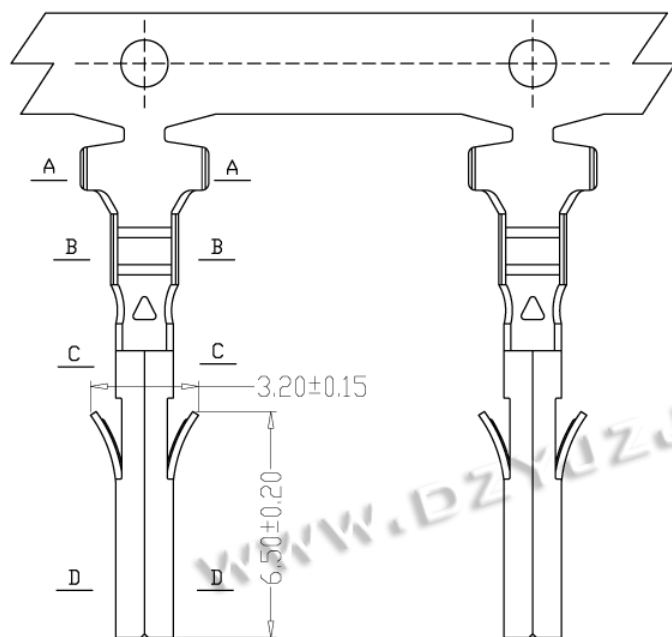



SEC:A-A

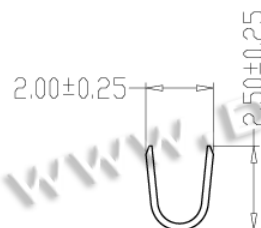

SEC:B-B

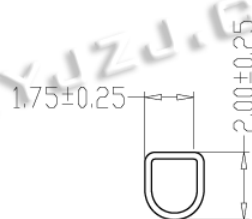

SEC:C-C



SEC:D-D



SPECIFICATIONS

- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material:Phosphoric bronze Tin-plated
- 8、Applicable Wire Sizes:AWG#20~26#




深圳市华宇创精密电子有限公司



TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 5557母端
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC02-PT-143
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.
			DRAW NO: SHEET NO. 1 OF 1

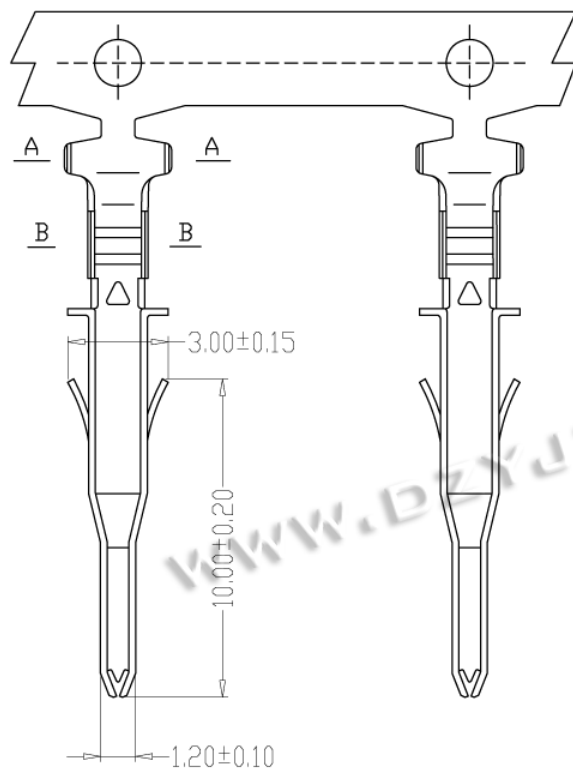

SEC: A-A



SEC: B-B

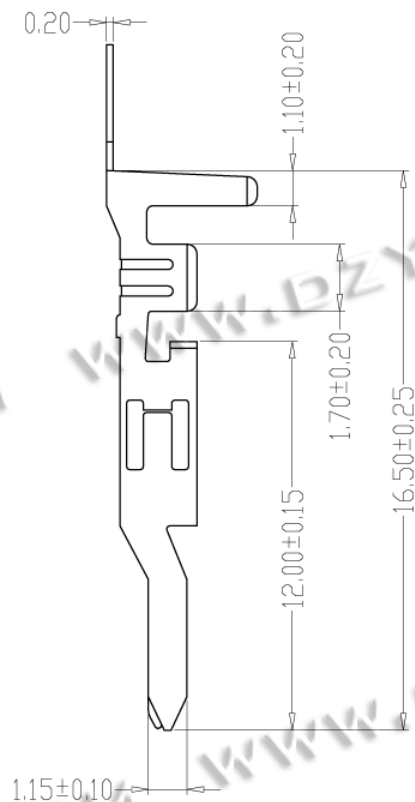

SEC: C-C




SPECIFICATIONS

- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Phosphoric bronze Tin-plated
- 8、Applicable Wire Sizes: AWG#20~26#





深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 5557公端
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC02-RT-165
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.
			DRAW NO: SHEET NO. 1 OF 1

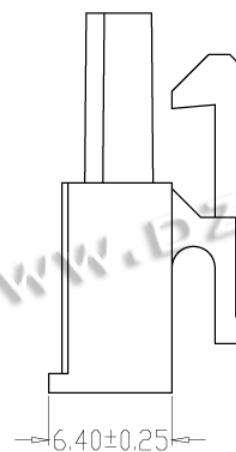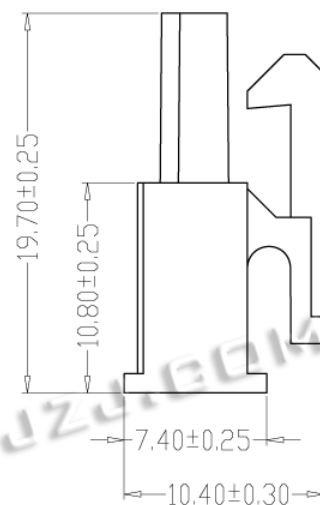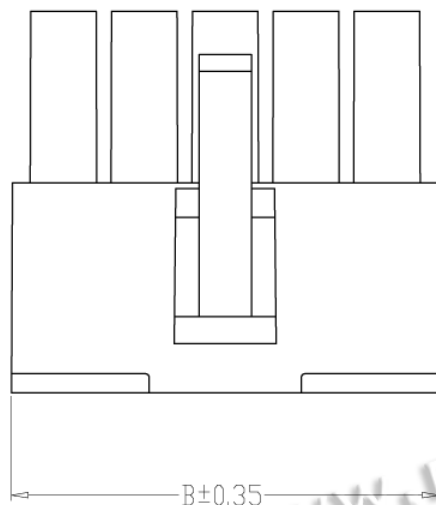

2P

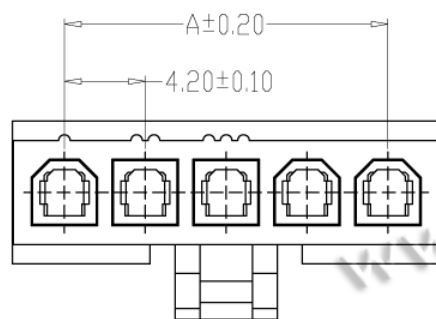

3P



2P

SPECIFICATIONS



- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 15000V AC/minute
- 7、Material:Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
HYC02-02P-420	4.20	9.60
HYC02-03P-420	8.40	13.80
HYC02-04P-420	12.60	18.00
HYC02-05P-420	16.80	22.20



深圳市华宇创精密电子有限公司




TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5" UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 5557单排孔座 (公壳)	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO:	
			SHEET NO.	1 OF 1

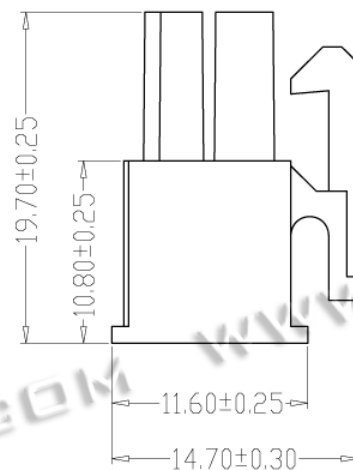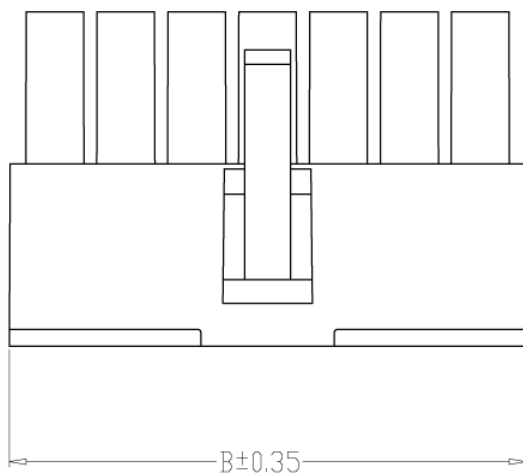


SPECIFICATIONS

- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
HYC02-2×01P-420	—	5.40
HYC02-2×02P-420	4.20	9.60
HYC02-2×03P-420	8.40	13.80
HYC02-2×04P-420	12.60	18.00
HYC02-2×05P-420	16.80	22.20
HYC02-2×06P-420	21.00	26.40
HYC02-2×07P-420	25.20	30.60
HYC02-2×08P-420	29.40	34.80
HYC02-2×09P-420	33.60	39.00
HYC02-2×10P-420	37.80	43.20
HYC02-2×11P-420	42.00	47.40
HYC02-2×12P-420	46.20	51.60

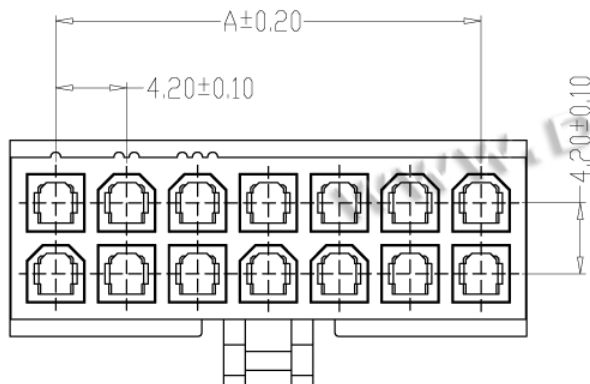

2X2P



2X1P




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X.* ±2* X.X* ±0.5*



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

5557双排孔座 (公壳)

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.


MOLD NO.

DRAW NO:

SHEET NO.

SEE TABLE


1 OF 1

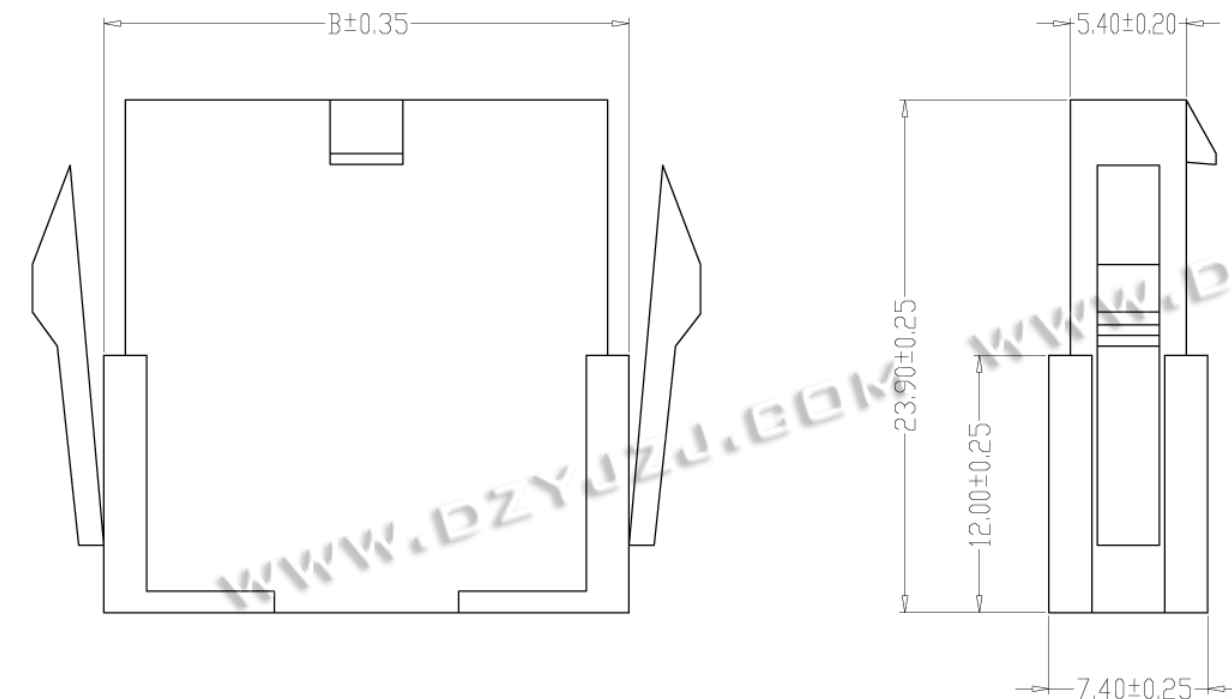

SPECIFICATIONS

- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 15000V AC/minute
- 7、Material: Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
HYC02-02R-420	4.20	9.60
HYC02-03R-420	8.40	13.80
HYC02-04R-420	12.60	18.00
HYC02-05R-420	16.80	22.20

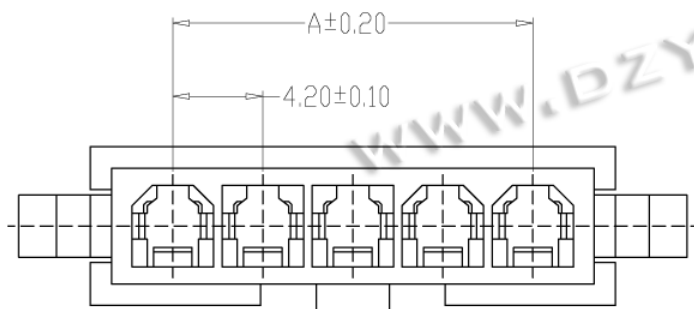

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$ 

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

5557单排孔座 (母壳)

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.




MOLD NO.

DRAW NO:

SHEET NO.

SEE TABLE

1 OF 1

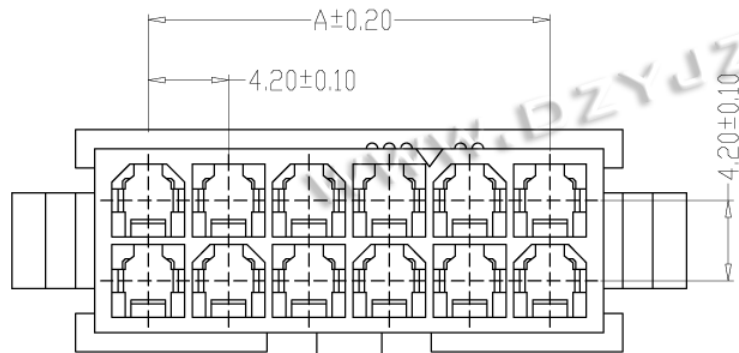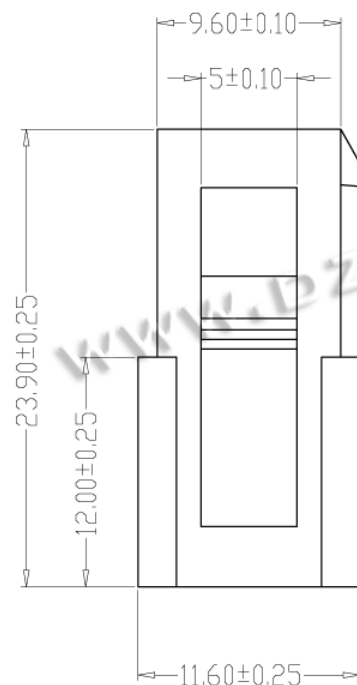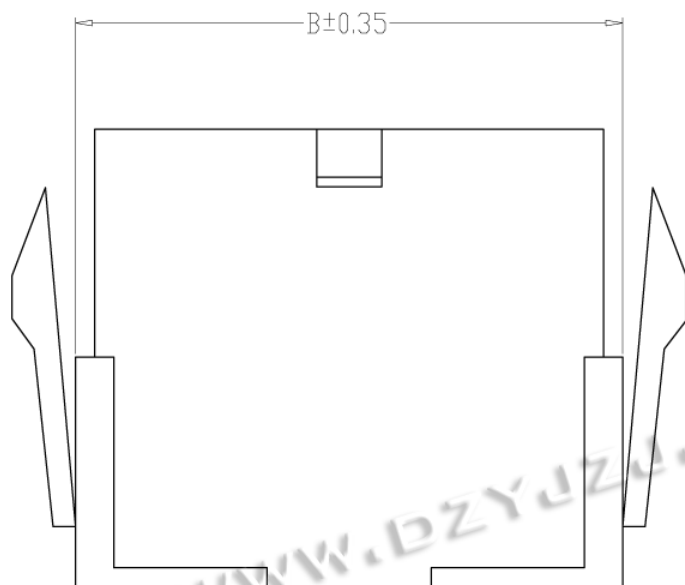

SPECIFICATIONS

- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
HYC02-2×01R-420	---	5.40
HYC02-2×02R-420	4.20	9.60
HYC02-2×03R-420	8.40	13.80
HYC02-2×04R-420	12.60	18.00
HYC02-2×05R-420	16.80	22.20
HYC02-2×06R-420	21.00	26.40
HYC02-2×07R-420	25.20	30.60
HYC02-2×08R-420	29.40	34.80
HYC02-2×09R-420	33.60	39.00
HYC02-2×10R-420	37.80	43.20
HYC02-2×11R-420	42.00	47.40
HYC02-2×12R-420	46.20	51.60



深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X.* ±2° X.*' ±0.5°



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

5557双排孔座 (母壳)

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.

SEE TABLE

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1