
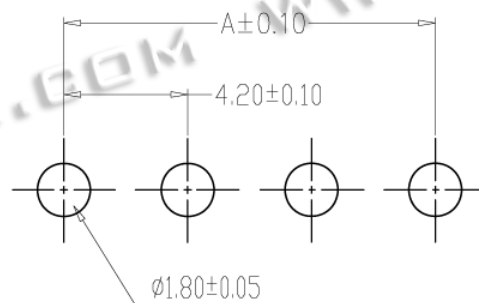
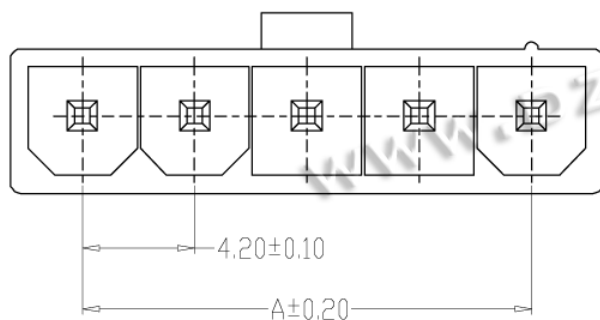


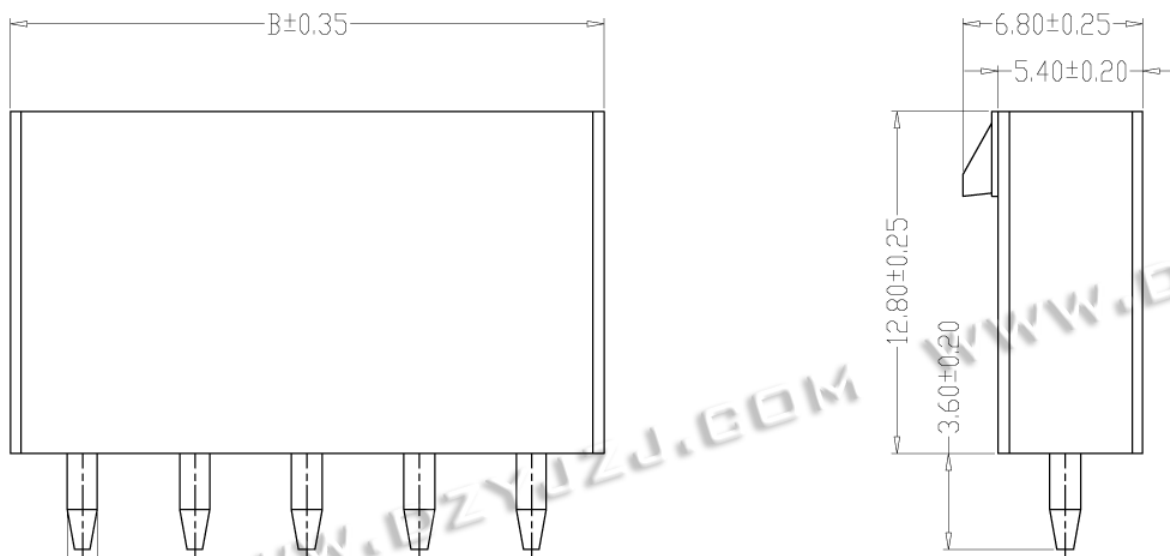

PCB LAYOUT

SPECIFICATIONS



- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC01-02A-420	4.20	9.60
HYC01-03A-420	8.40	13.80
HYC01-04A-420	12.60	18.00
HYC01-05A-420	16.80	22.20





深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 5569 单排直针	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO:	
			SHEET NO.	1 OF 1

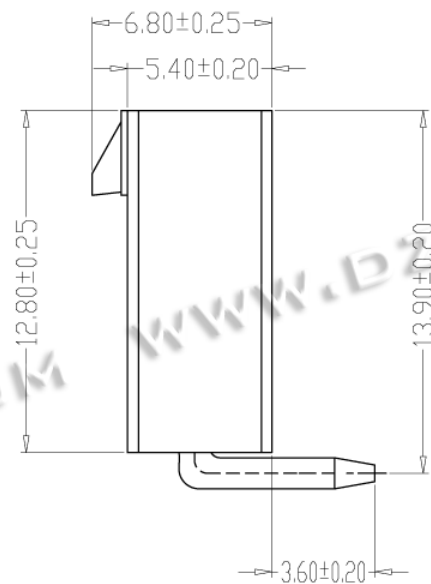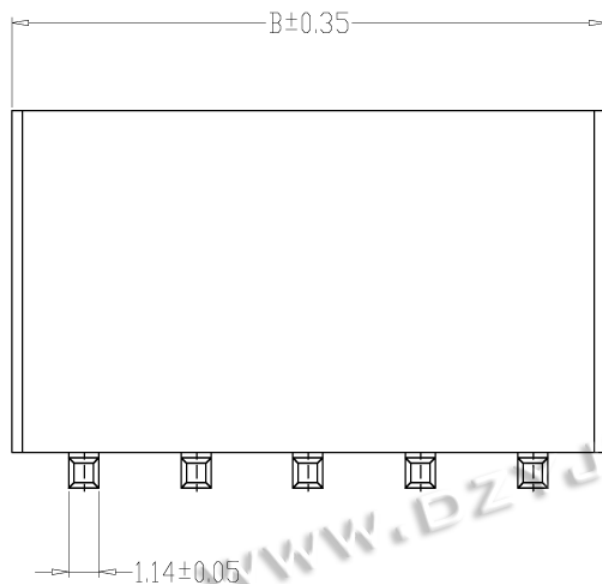

SPECIFICATIONS

- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ B
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

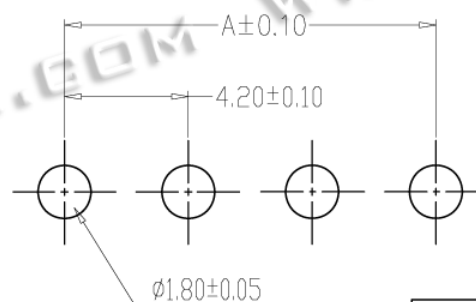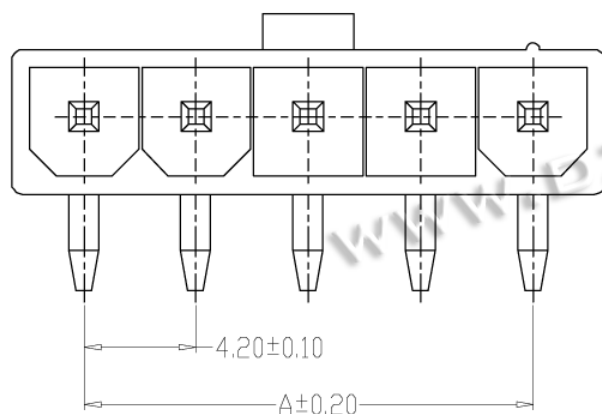



PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
HYC01-02AW-420	4.20	9.60
HYC01-03AW-420	8.40	13.80
HYC01-04AW-420	12.60	18.00
HYC01-05AW-420	16.80	22.20



深圳市华宇创精密电子有限公司



TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 5569 单排弯针	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

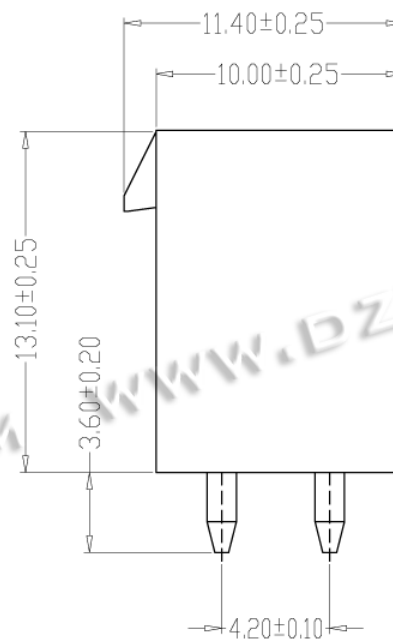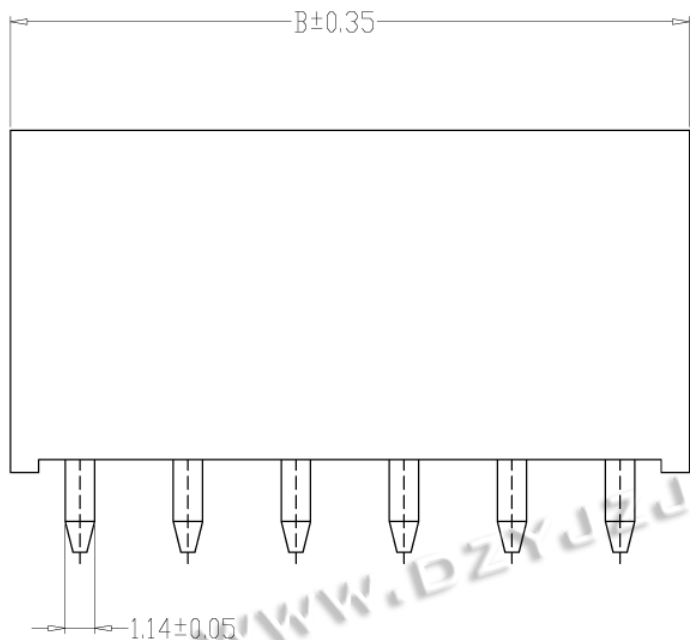

SPECIFICATIONS

- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC01-2×01A-420		5.40
HYC01-2×02A-420	4.20	9.60
HYC01-2×03A-420	8.40	13.80
HYC01-2×04A-420	12.60	18.00
HYC01-2×05A-420	16.80	22.20
HYC01-2×06A-420	21.00	26.40
HYC01-2×07A-420	25.20	30.60
HYC01-2×08A-420	29.40	34.80
HYC01-2×09A-420	33.60	39.00
HYC01-2×10A-420	37.80	43.20
HYC01-2×11A-420	42.00	47.40
HYC01-2×12A-420	46.20	51.60

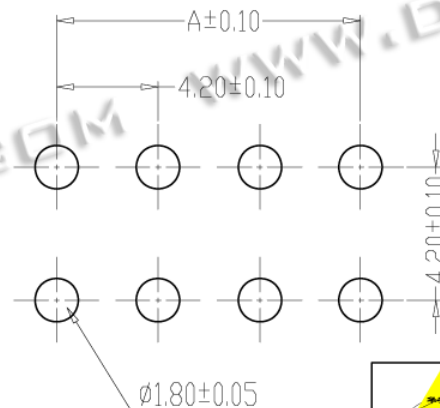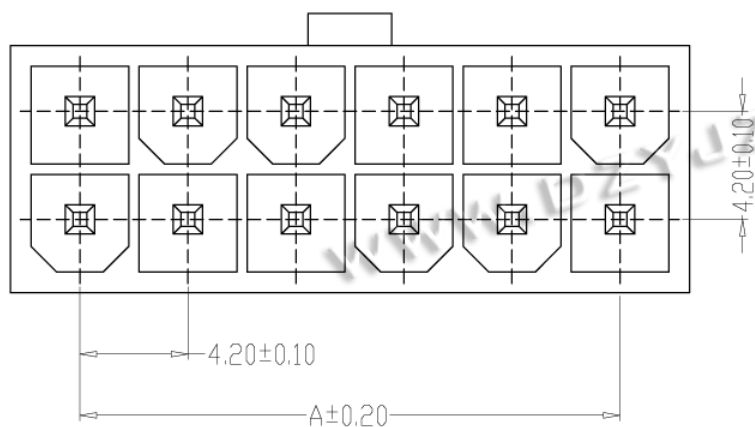


PCB LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

5569 双排直针

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.




SEE TABLE

MOLD NO.

DRAW NO:

SHEET NO.


1 OF 1

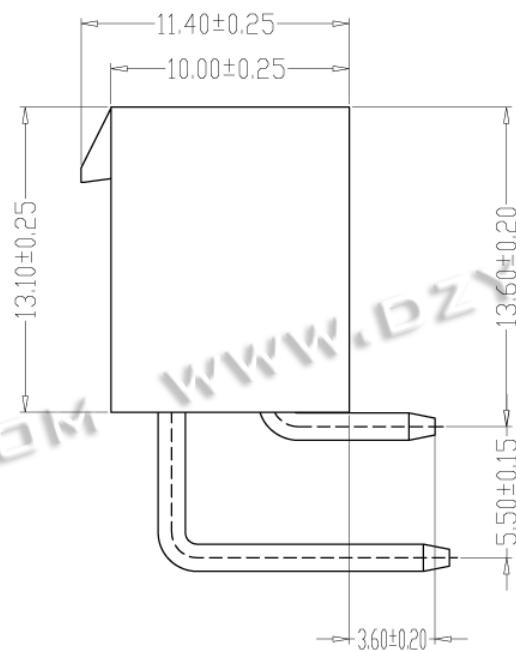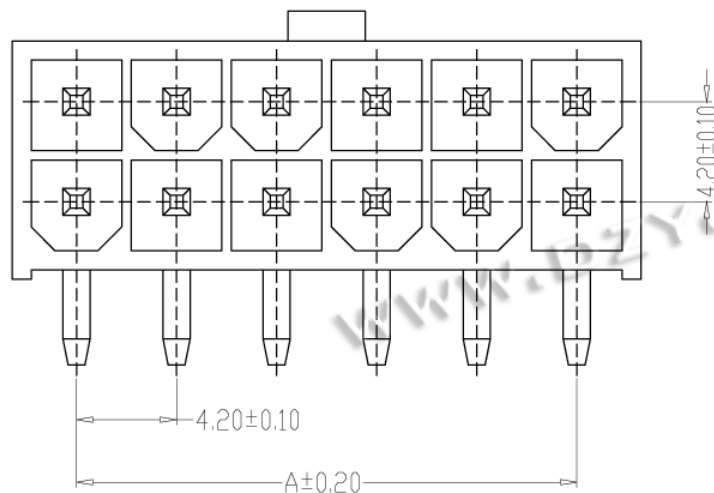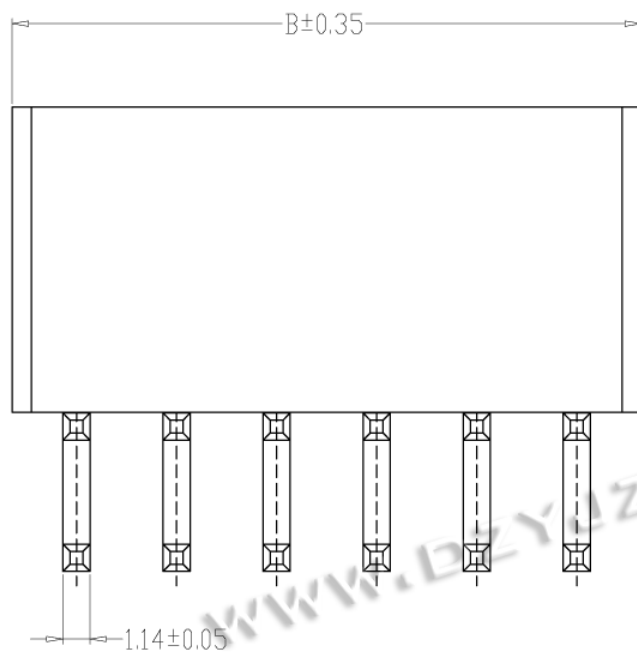

SPECIFICATIONS

- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltage: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC01-2×01AW-420		5.40
HYC01-2×02AW-420	4.20	9.60
HYC01-2×03AW-420	8.40	13.80
HYC01-2×04AW-420	12.60	18.00
HYC01-2×05AW-420	16.80	22.20
HYC01-2×06AW-420	21.00	26.40
HYC01-2×07AW-420	25.20	30.60
HYC01-2×08AW-420	29.40	34.80
HYC01-2×09AW-420	33.60	39.00
HYC01-2×10AW-420	37.80	43.20
HYC01-2×11AW-420	42.00	47.40
HYC01-2×12AW-420	46.20	51.60




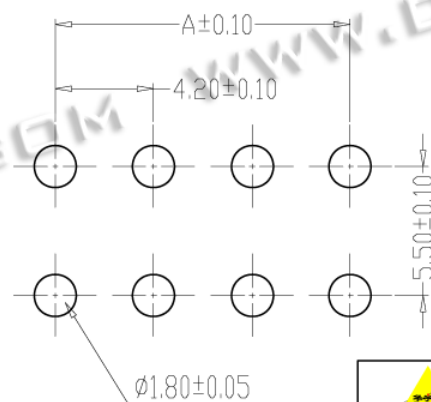


PCB LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 5569 双排弯针	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

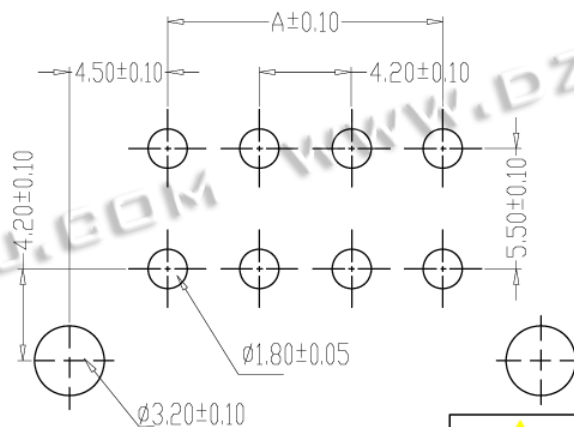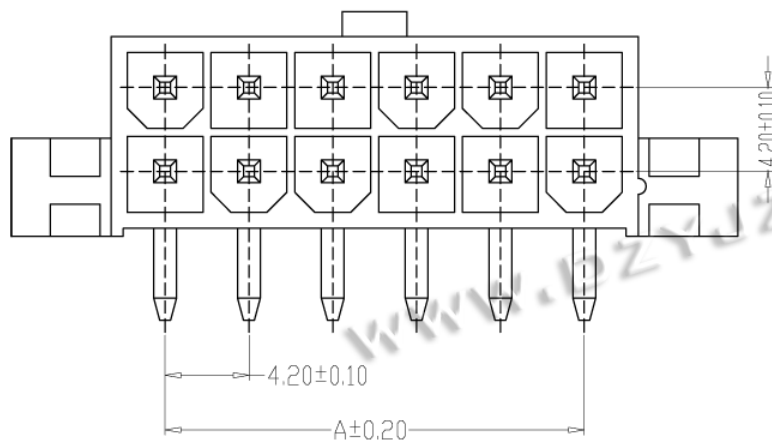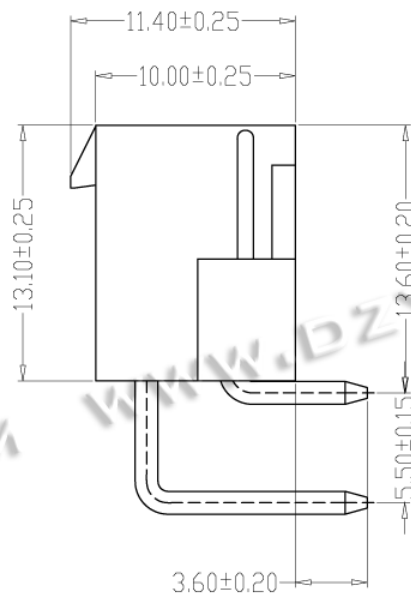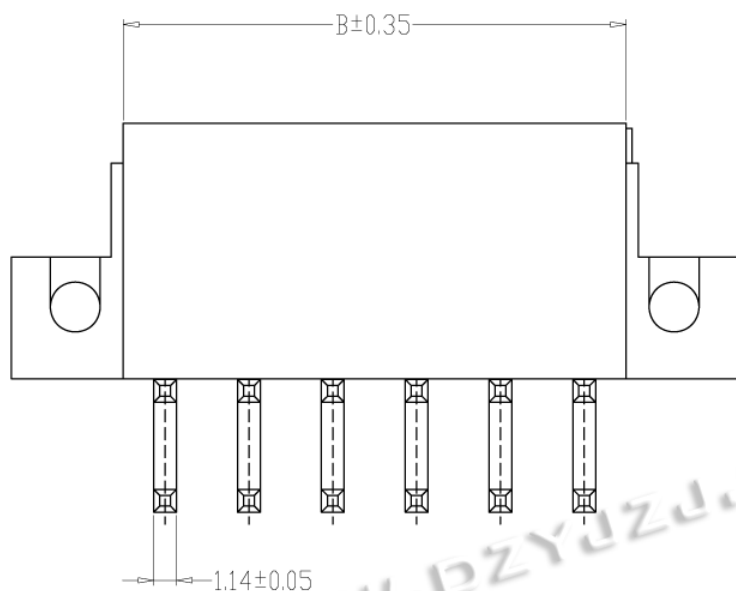

PCB LAYOUT

SPECIFICATIONS


- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC01-2×01AWD-420		5.40
HYC01-2×02AWD-420	4.20	9.60
HYC01-2×03AWD-420	8.40	13.80
HYC01-2×04AWD-420	12.60	18.00
HYC01-2×05AWD-420	16.80	22.20
HYC01-2×06AWD-420	21.00	26.40
HYC01-2×07AWD-420	25.20	30.60
HYC01-2×08AWD-420	29.40	34.80
HYC01-2×09AWD-420	33.60	39.00
HYC01-2×10AWD-420	37.80	43.20
HYC01-2×11AWD-420	42.00	47.40
HYC01-2×12AWD-420	46.20	51.60



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$ 

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

5569 双排定位弯针

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.

SEE TABLE

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1