

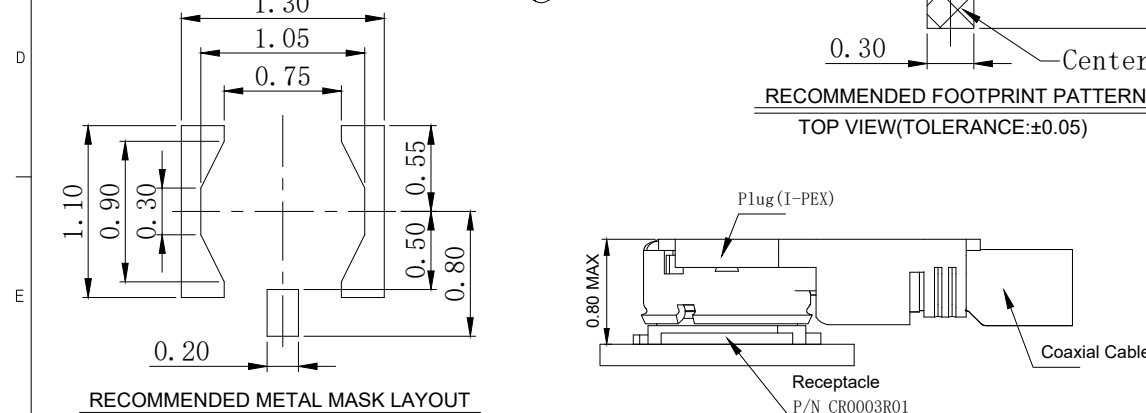
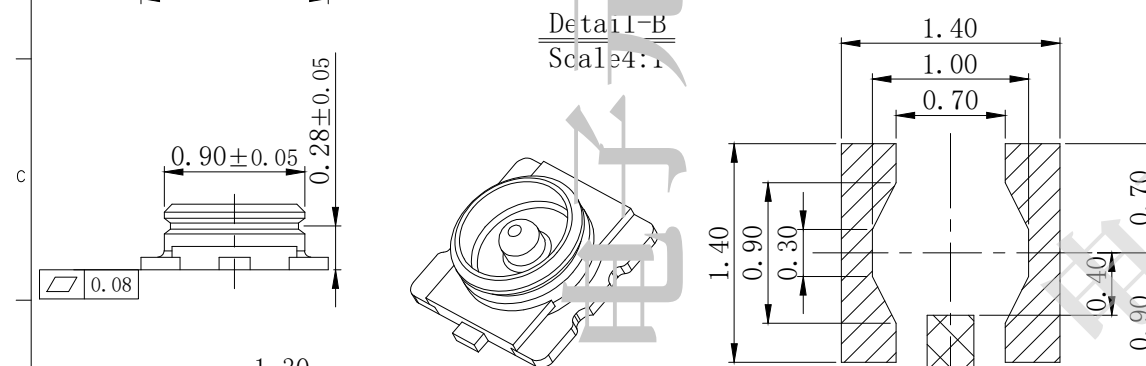
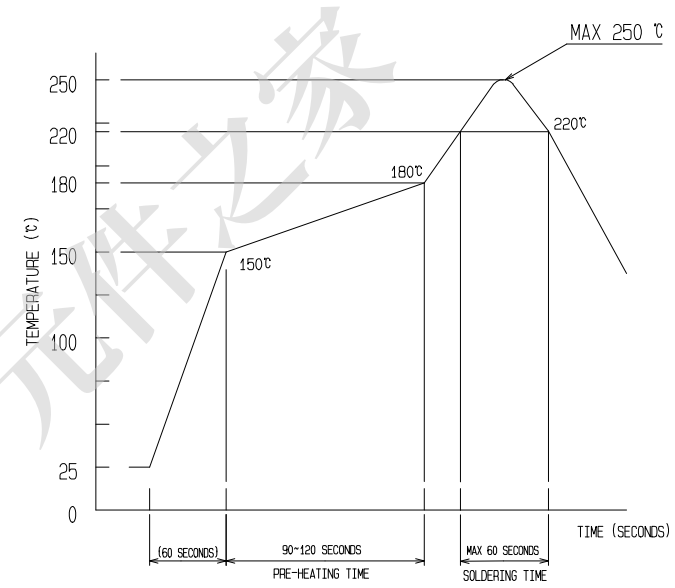


REV.	ECN NUMBER	DESCRIPTION	DAET	DRAWN	CHECKED	APPROVED
A	/	NEW	2022.11.20	James	Tony	Mike

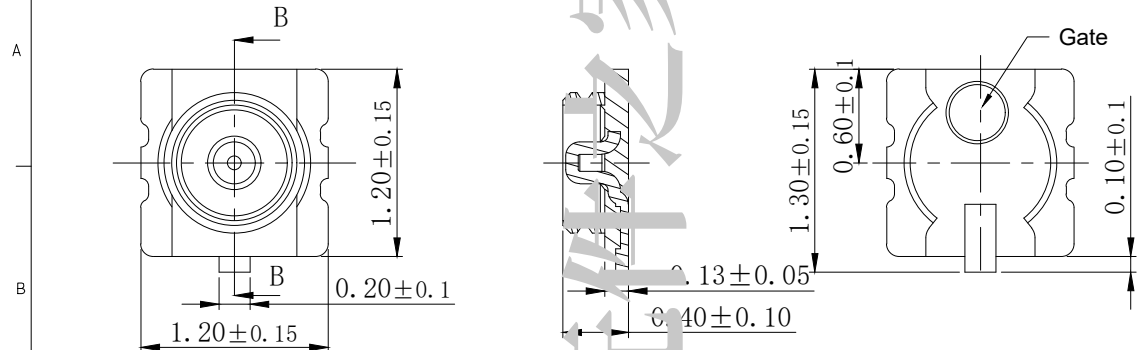

RECOMMENDED METAL MASK LAYOUT
TOP VIEW (TOLERANCE:±0.03),T=0.12


TABLE A		
F	PART NUMBER	DESCRIPTION, PLATING
	CR0003R01A	CONTACT AND GROUND CONTACT GOLD FLASH
	CR0003R01B	CONTACT Au 3u", GROUND CONTACT Au 1u"

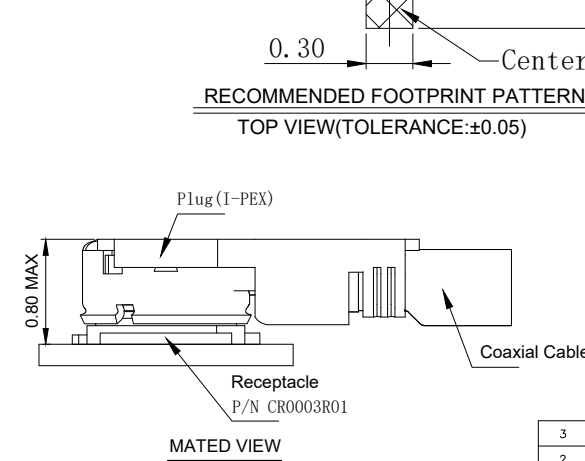


- NOTES:
- 1.0 VOLTAGE: 60V AC/DC
 - 2.0 IMPEDANCE: 50Ω
 - 3.0 OPERATION TEMPERATURE: -40° C TO +85° C
 - 4.0 CONTACT RESISTANCE:
PIN:20mΩ MAX INTIAL, 40mΩ MAX AFTER TEST
SHELL:20mΩ MAX INTIAL, 40mΩ MAX AFTER TEST
 - 5.0 INSULATION RESISTANCE: 500MΩ MIN INTIAL, 100MΩ MIN AFTER TEST
 - 6.0 DIELECTIC WITHSTANDING VOLTAGE: 200V AC FOR ONE MINUTE
 - 7.0 DURABILITY:20 CYCLES
 - 8.0 IR REFLOW CYCLE: 2 CYCLES MAX.
 - 9.0 VSWR:
1.3 MAX. at 0.1~3 GHz ; 1.4 MAX. at 3~6 GHz;
 - 10.0 Salt spray:48H

3	GROUND CONTACT	C5191, GOLD PLATING OVER NICKEL	6	REEL	PLASTIC
2	CONTACT	C5191, GOLD PLATING OVER NICKEL	5	COVER TAPE	PLYESTER
1	HOUSING	LCP, BLACK, UL 94 V-0	4	EMBOSSED CARRIER TAPE	PS
NO.	PART NAME	DESCRIPTION , REMARKS	NO.	PART NAME	DESCRIPTION , REMARKS
GENERAL	TOLERANCE	UNITS:mm	SCALE 1 : 1	TITLE: MCR 6th COAXIAL SOCKET, L1.2 * W1.2 * H0.4mm	
X. ± 0.30	X.* ± 5°	APPROVED	LEO	DRAWING NO. : C-CR0003R-1	
.X ± 0.20	.X* ± 3°	CHECKED	Gong	PART NO. : SEE TABLE A	
.XX ± 0.15	.XX* ± 2°	DESIGNED	Qiang	1/2	



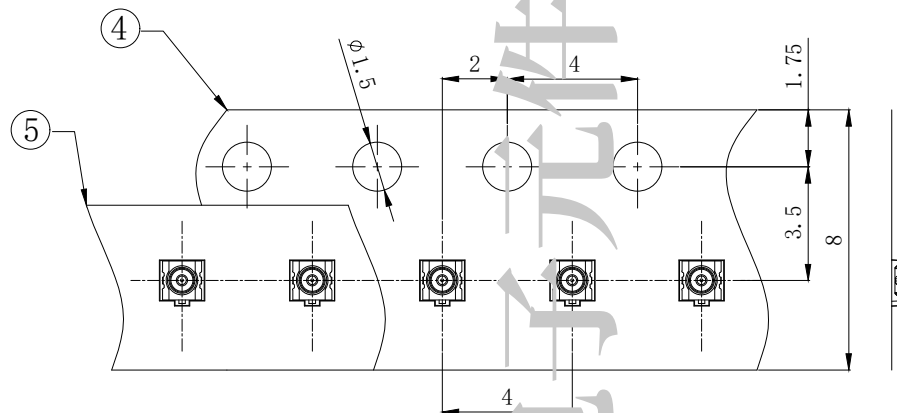

DIRECTION OF UNREELING

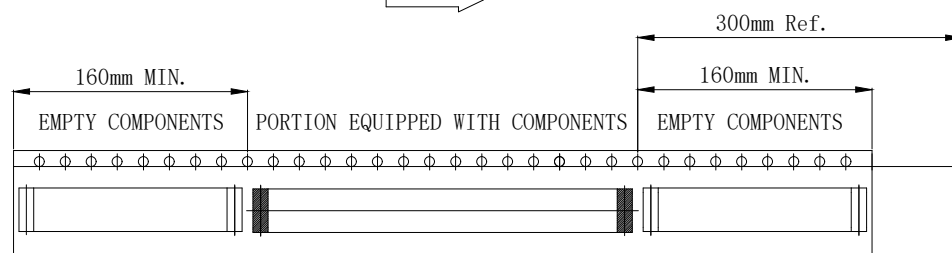



TRAILER

TAPING (FREE)

LEADER

PART NO. LABLE

6

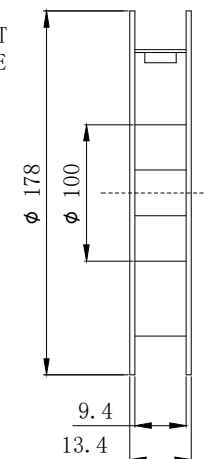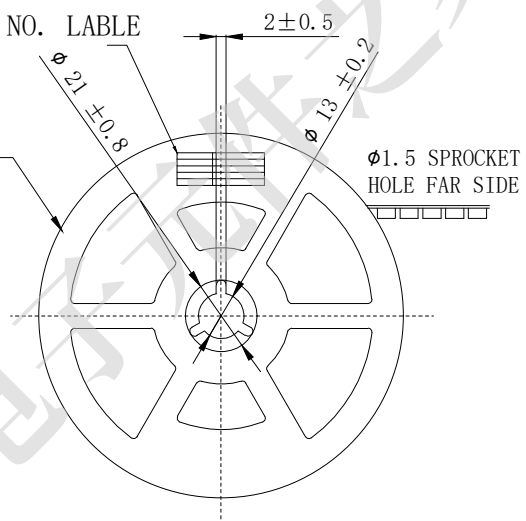

STYLE AND DIMENSION OF REEL

PER REEL 5000 CONNECTORS

CPT 元精技术

GENERAL	TOLERANCE	UNITS:mm	SCALE 1 : 1		TITLE: MCR 6th COAXIAL SOCKET, L1.20 * W1.20 * H0.4mm	
X. ± 0.30	X.* ± 5°	APPROVED	LEO		DRAWING NO. : C-CR0003R-1	A
.X ± 0.20	.X* ± 3°	CHECKED	Gong		PART NO. : SEE TABLE A	2
.XX ± 0.15	.XX* ± 2°	DESIGNED	Qiang			2