
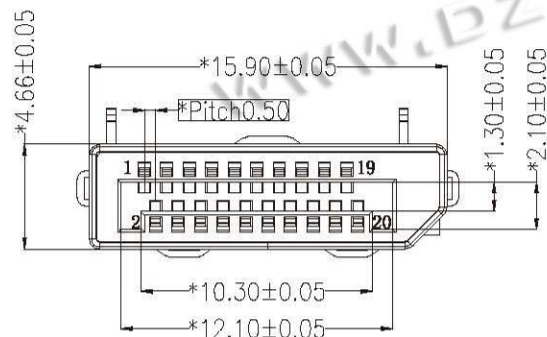
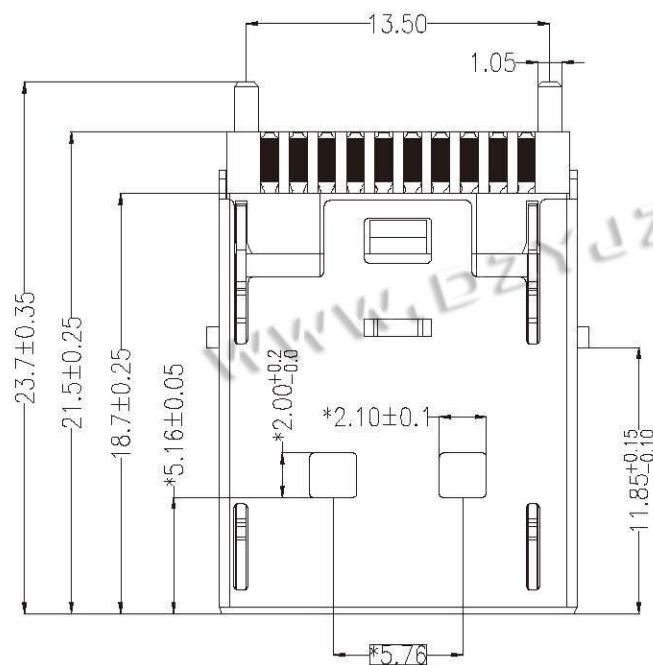


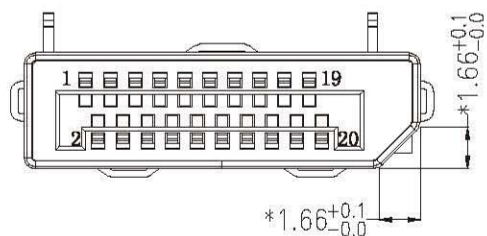

| X(材质)        | X(电镀)        |
|--------------|--------------|
| 铜/Copper (C) | 金/Gold (G)   |
| 铁/Iron (I)   | 镍/Nickel (N) |

**Material(材质):**

- (1)Housing:LCP UL94V-0 Colour Black  
 (2)Shell:Iron Plating Imitation Gold flash  
 (3)Contact:copper alloy Plating Au Gold flash  
 (4)Subject:LCP UL94V-0 Colour Black

**Electrical Specifcating:**

- (1)Contact current rating:0.5A min.  
 (2)Voltage rating:40V AC (RMS).  
 (3)Withstanding voltage:500V AC for 1 minute.  
 (4)Insulation resistance:100 megaohms max.  
 (5)Contact resistance:60 milliohms max.

**Mechanical:**

- (1)Insertion force:44.1N max.  
 (2)Withdrawal force:9.8N min/39.2N max.



**Environmental:**

- (1)Operating temperature:-25°C to +85°C.







深圳市华宇创精密电子有限公司


|                                                                                                                               |                     |               |                                   |
|-------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------|-----------------------------------|
| <b>TOLERANCE:</b><br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X' ±2' X.X' ±0.5'<br><br>UNIT: mm [inch]<br>SCALE:1:1 SIZE: A4 | <b>DRAWN BY :</b>   | <b>DATE :</b> | <b>PART NAME:</b>                 |
|                                                                                                                               | 陈一鸣                 | 2014-02-23    | DP 焊线公头 带卡勾 加锡                    |
|                                                                                                                               | <b>CHECKED BY:</b>  | <b>DATE :</b> | <b>PART NO.</b> HYC43-DP20-237-XX |
|                                                                                                                               | 马跃                  | 2014-02-23    | <b>MOLD NO.</b>                   |
|                                                                                                                               | <b>APPROVED BY:</b> | <b>DATE :</b> | <b>DRAW NO:</b> HYC-2411071040    |
|                                                                                                                               | 邱敏                  | 2014-02-23    | <b>SHEET NO.</b> 1 OF 1           |

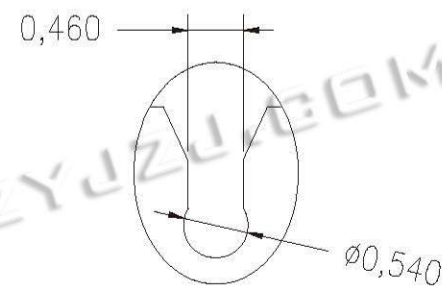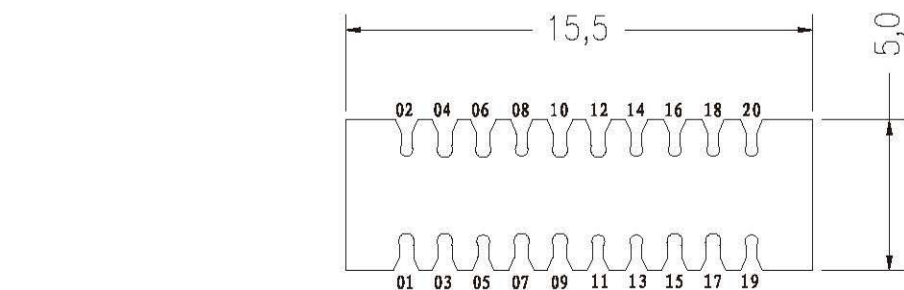

1, 3, 4, 6, 7, 9, 10, 12, 15, 17线槽

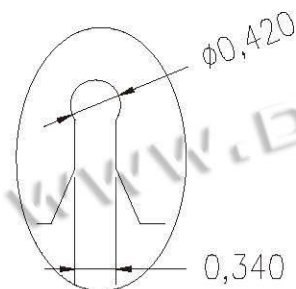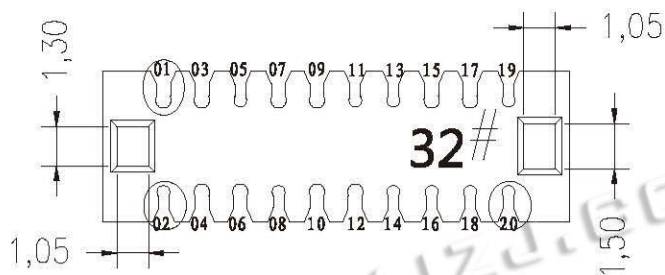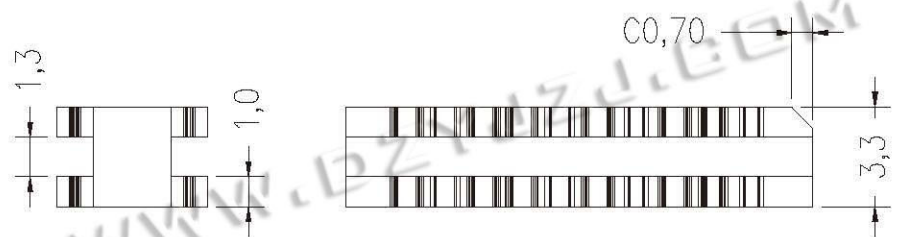

2, 5, 8, 11, 16线槽

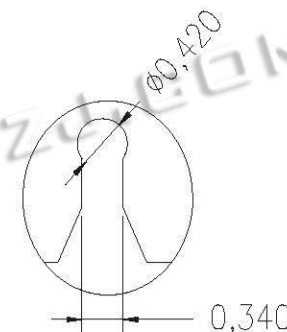

13, 14, 18, 19, 20线槽

Material(材质):  
(1)Housing:PA66 Colour Black



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°

UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

DP 公头32# 黑色排线夹

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NO.

HYC43-DP20-237-X




MOLD NO.

DRAW NO:



HYC-2411071053

SHEET NO.


1 OF 1

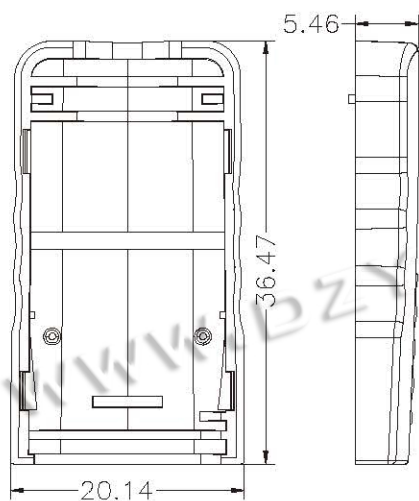

下盖

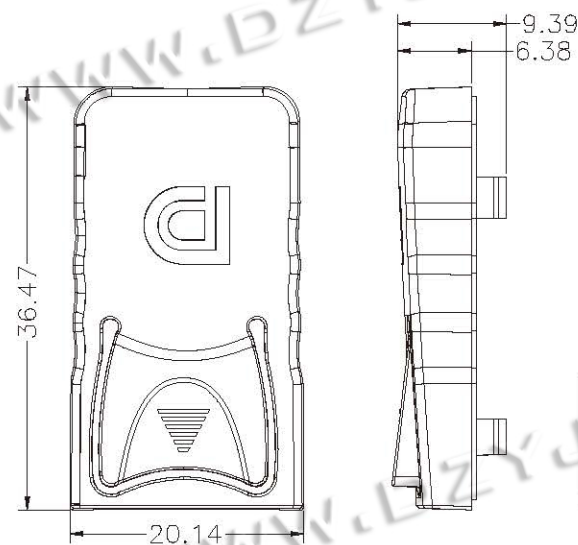

上盖



备注:

1.材质: ABS

2.外观:表面不能有毛边 缺胶 缩水 变形 碎裂  
流花 流纹 顶白 烧焦等不良

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

DP 公头三件式 外壳

CHECKED BY:

马跃

DATE:

2014-02-23

PART NO.

HYC43-DP20-237-K

MOLD NO.

APPROVED BY:

邱敏

DATE:

2014-02-23

DRAW NO:

HYC-2411071056

SHEET NO.

1 OF 1