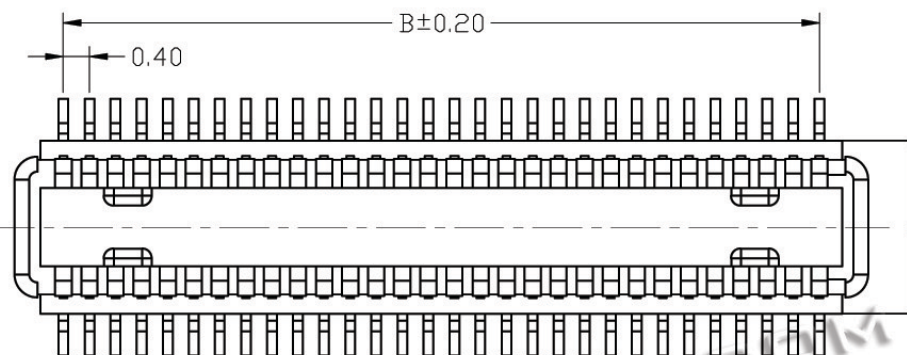


RECOMMENDED PCB LAYOUT

PIN NO	A	B
24	5.90	4.40
30	7.10	5.60
36	8.30	6.80
40	9.10	7.60
50	11.10	9.60
54	11.90	10.40
60	13.10	11.60
70	15.10	13.60

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
 - 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
 - 3.INSULATION RESISTANCE: 50MΩ MIN;
 - 4.CONTACT RESISTANCE: 100mΩ MAX;
 - 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.
- MATERIAL:**

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;

PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 50u" MIN. OVER ALL;



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X." ±2" X.X" ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

0.4PH 单槽BTB (1.5H) 公

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC15M-BTB2XN-150

MOLD NO.

APPROVED BY:

邱敏

DATE :



2014-02-23

DRAW NO:



HYC-2110141159

SHEET NO.

1 OF 1

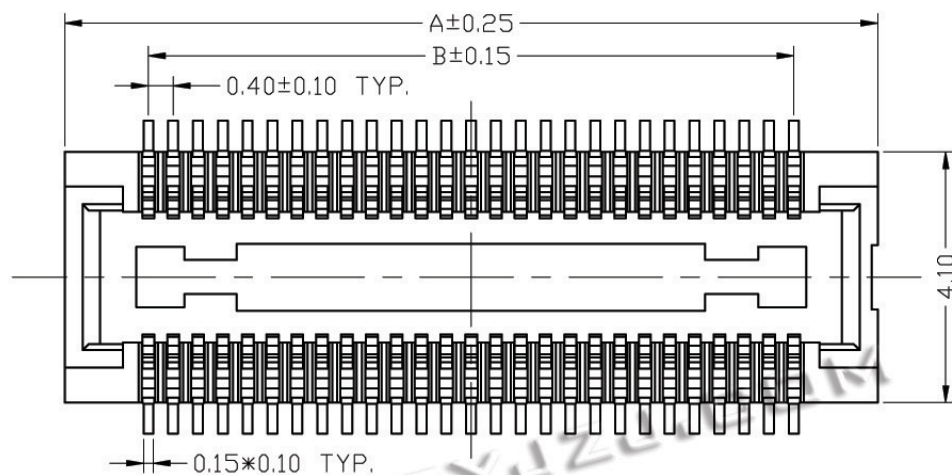

PIN NO.	DIM. A	DIM. B
20	6.30	3.60
24	7.10	4.40
30	8.30	5.60
34	9.10	6.40
40	10.30	7.60
50	12.30	9.60
54	13.10	10.40
60	14.30	11.60
70	16.30	13.60

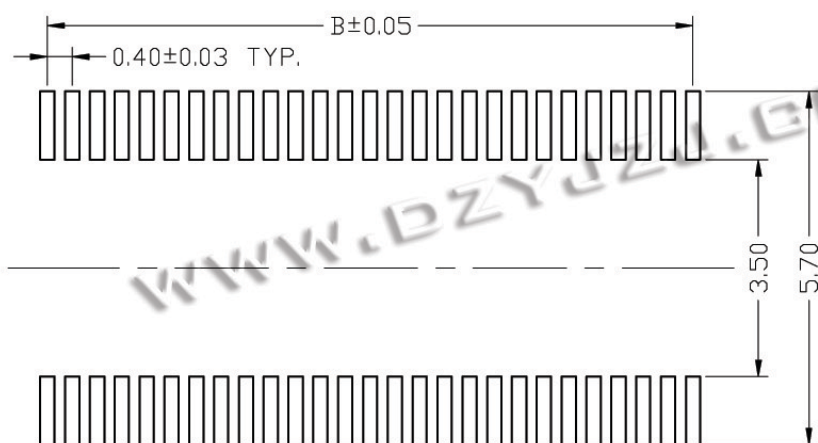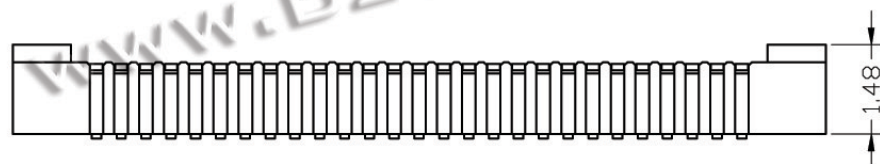RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN;
- 4.CONTACT RESISTANCE: 100m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;

PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 50u" MIN. OVER ALL;



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 0.4PH 单槽BTB (1.5H) 母	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC15F-BTB2XN-150
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2110141157
				SHEET NO.	1 OF 1