
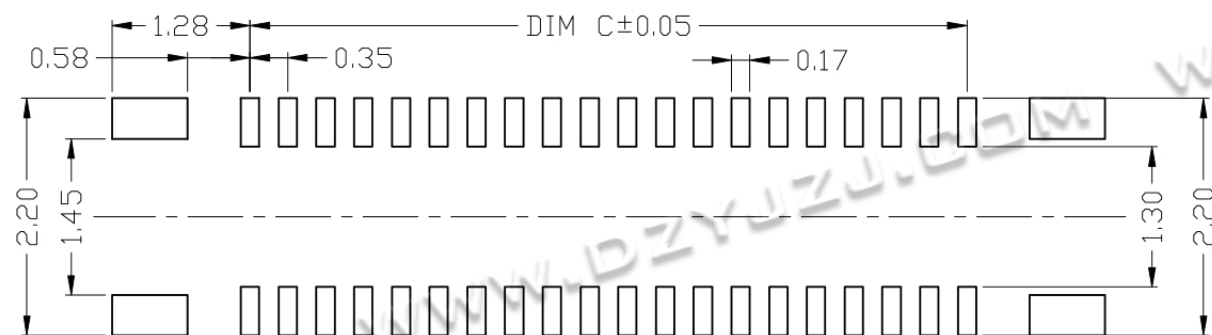
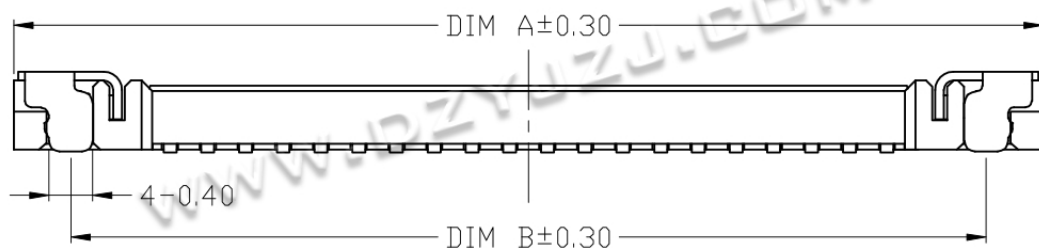



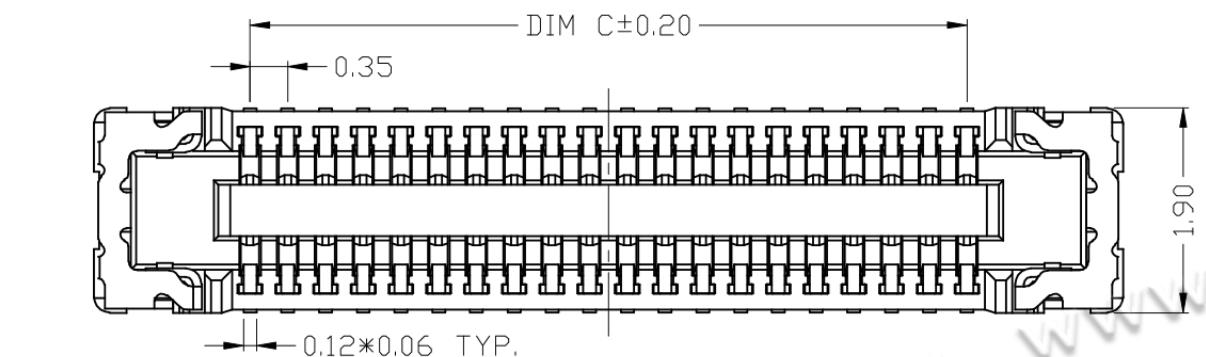

RECOMMENDED PCB LAYOUT

PIN NO.	DIM A	DIM B	DIM C
24	6.75	5.68	3.85
30	7.80	6.73	4.90
34	8.50	7.43	5.60
38	9.20	8.13	6.30
40	9.55	8.48	6.65
50	11.30	10.23	8.40
60	13.05	11.98	10.15

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/AC, DC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN.;
- 4.CONTACT RESISTANCE: 90m Ω MAX.;
- 5.OPERATING TEMPERATURE RANGE: -35 $^{\circ}$ C TO 85 $^{\circ}$ C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;

PLATING:


- 1.TERMINAL: GOLD 2 MICRO INCH,
NICKEL 40 MICRO INCH MIN. OVER ALL;



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15
X.' $\pm 2'$ X.X' $\pm 0.5'$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY :

马跃

DATE :

2014-02-23

APPROVED BY :

邱敏

DATE :

2014-02-23

PART NAME:

0.35PH 单槽BTB母座

PART NO.

HYC34F-BTB2XN-070


MOLD NO.

DRAW NO:



HYC-2205110959

SHEET NO.

1 OF 1

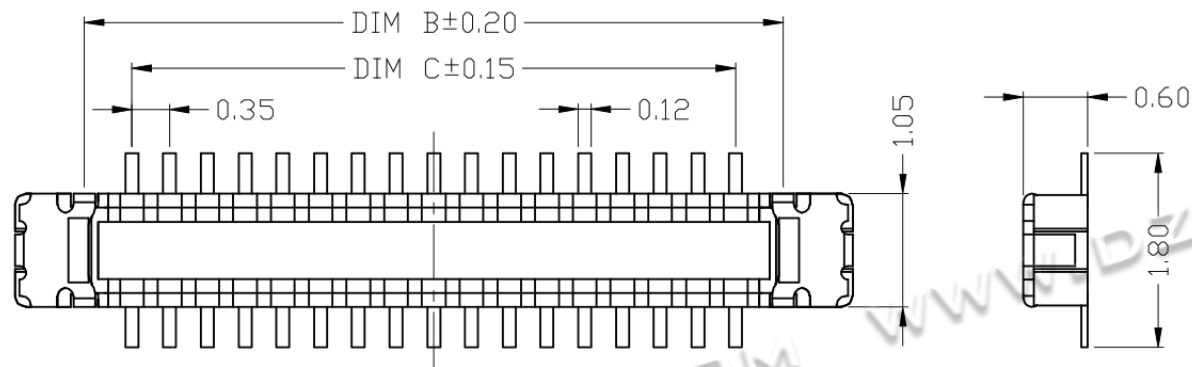

PIN NO.	DIM A	DIM B	DIM C
24	6.02	4.71	3.85
30	7.07	5.76	4.90
34	7.77	6.46	5.60
38	8.47	7.16	6.30
40	8.82	7.51	6.65
50	10.57	9.26	8.40
60	12.32	11.01	10.15

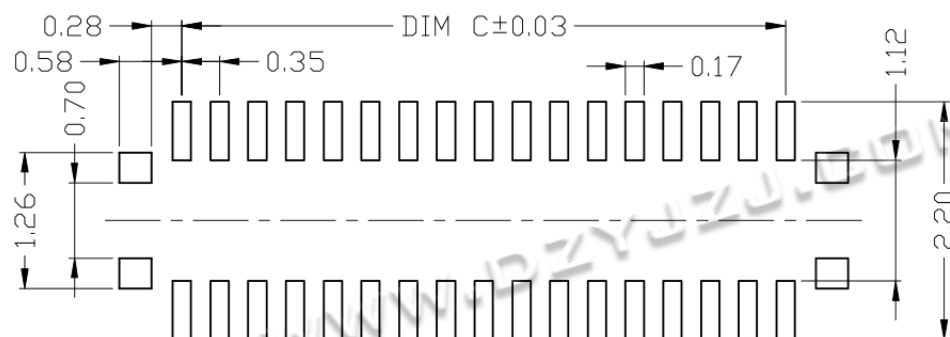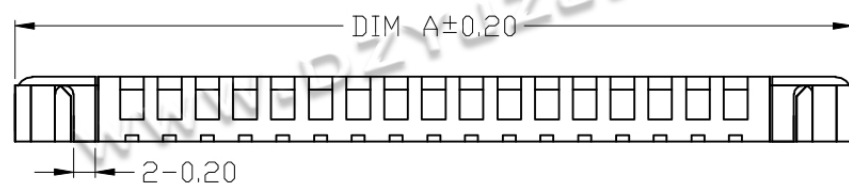

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/AC, DC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN.;
- 4.CONTACT RESISTANCE: 90m Ω MAX.;
- 5.OPERATING TEMPERATURE RANGE: -35 $^{\circ}$ C TO 85 $^{\circ}$ C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;

PLATING:


- 1.TERMINAL: GOLD 2 MICRO INCH,
NICKEL 40 MICRO INCH MIN. OVER ALL;



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15
X.' $\pm 2'$ X.X' $\pm 0.5'$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

0.35PH 单槽BTB公座

PART NO.

HYC34M-BTB2XN-060

MOLD NO.

DRAW NO:

HYC-2205110957

SHEET NO.

1 OF 1