

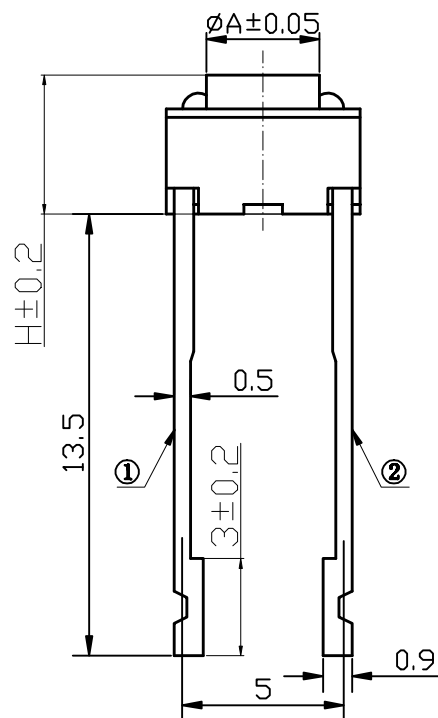




PCB线路板安装图(±0.1)

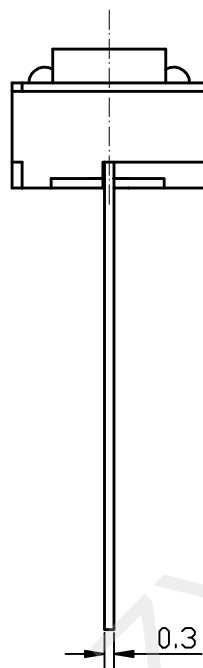

电路图

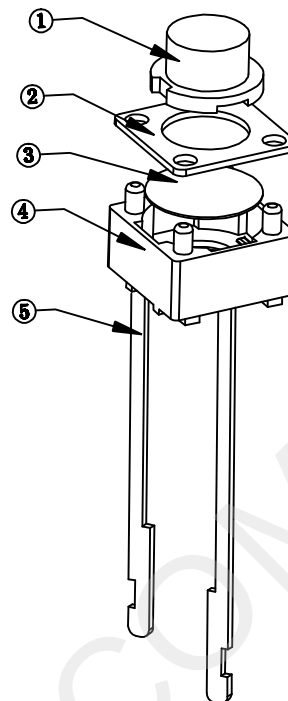

技术参数:

1. 做用温度: $-25\sim+85^{\circ}\text{C}$;
2. 额定负荷: DC 12V 50mA;
3. 接触电阻: $\leq 50\text{m}\Omega$;
4. 绝缘电阻: $\geq 100\text{M}\Omega$;
5. 耐 压: AC250V(50Hz)/min;
6. 动 作 力: $250\text{g}\pm 50\text{g}$;
7. 使用寿命: 80000次;
8. 未注尺寸公差参照下面表格。


5	接触脚	黄铜	镀银	1	
4	底座	PPA(黑色)	—	1	
3	簧片	复合银	Ni/Ag 0.2um	1	
2	盖板	冷轧钢带	铜锡	1	
1	按钮	PPA(黑色)	—	1	
序号	零件名称	材料规格	表面处理	数量	备注



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15
X.' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

6X6 180° 中二脚 插件按键 脚长13.5

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC-D66XXZG-135

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2510211534

SHEET NO.

1 OF 1