

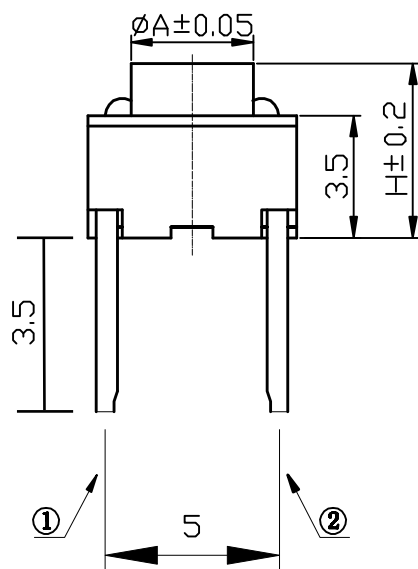


PCB线路板安装图(±0.1)



电路图

A	H(高度)
ø3.5	4.3
ø3.5	5.0
ø3.3	7.0
ø3.3	9.0
ø3.2	9.5
ø3.0	15

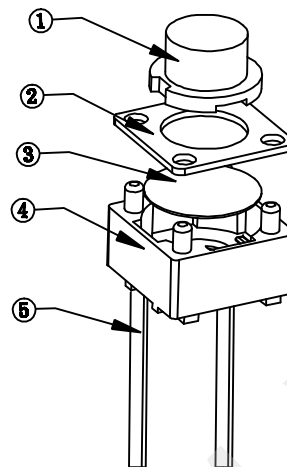

技术参数:

1. 做用温度: -25~+85℃;
2. 额定负荷: DC 12V 50mA;
3. 接触电阻: ≤50mΩ;
4. 绝缘电阻: ≥100MΩ;
5. 耐 压: AC250V(50Hz)/min;
6. 动 作 力: 260g±50g;
7. 使用寿命: 80000次;
8. 未注尺寸公差参照下面表格。

5	接触脚	黄铜	镀银	1	
4	底座	PPA(黑色)	—	1	
3	簧片	复合银	Ni/Ag 0.2um	1	
2	盖板	冷轧钢带	铜锡	1	
1	按钮	PPA(黑色)	—	1	
序号	零件名称	材料规格	表面处理	数量	备注



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 6X6 180° 中二脚 插件按键
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-D66XXZG
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2510211457
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1