

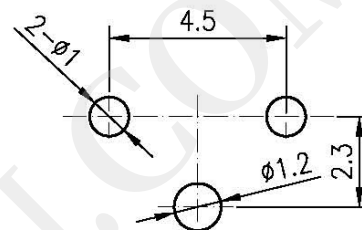
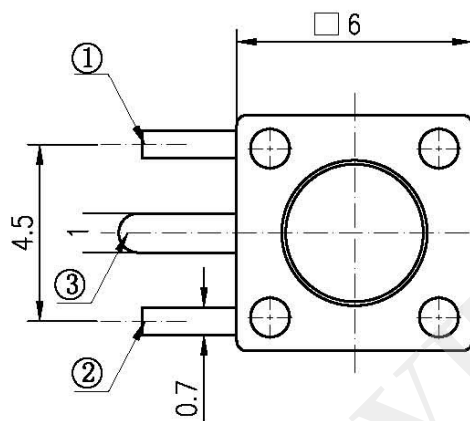



| A    | H(高度) |
|------|-------|
| ø3.5 | 4.3   |
| ø3.5 | 5.0   |
| ø3.3 | 6.0   |
| ø3.3 | 9.0   |
| ø3.2 | 9.5   |
| ø3.2 | 12    |
| ø3.0 | 15    |

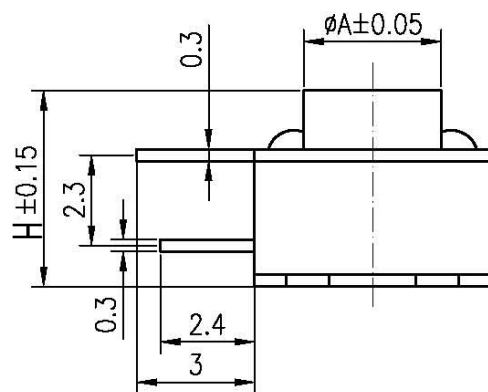


PCB线路板安装图(±0.1)

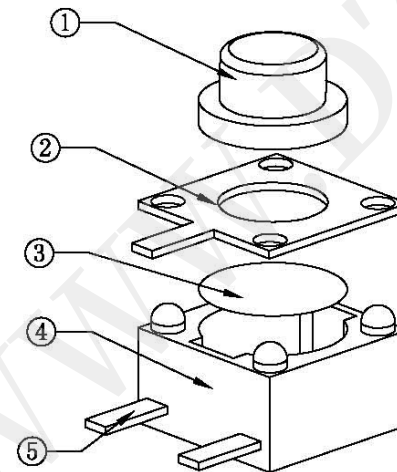

## 技术参数:

1. 做用温度: -25~+85℃;
2. 额定负荷: DC 12V 50mA;
3. 接触电阻: ≤50mΩ;
4. 绝缘电阻: ≥100MΩ;
5. 耐压: AC250V(50Hz)/min;
6. 动作力: 250g±50g;
7. 使用寿命: 100000次;
8. 未注尺寸公差参照下面表格。

| 5  | 接触脚  | 黄铜      | 镀银   | 1  |    |
|----|------|---------|------|----|----|
| 4  | 基座   | PPA(黑色) | ——   | 1  |    |
| 3  | 支架   | 冷轧钢带    | 铜锡   | 1  |    |
| 2  | 簧片   | 复合银     | 镀银   | 1  |    |
| 1  | 按钮   | PPA(黑色) | ——   | 1  |    |
| 序号 | 零件名称 | 材料规格    | 表面处理 | 数量 | 备注 |



电路图



深圳市华宇创精密电子有限公司

|                                                                           |                    |                      |                            |                     |
|---------------------------------------------------------------------------|--------------------|----------------------|----------------------------|---------------------|
| TOLERANCE:<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X' ±2" X.X' ±0.5' | DRAWN BY :<br>陈一鸣  | DATE :<br>2014-02-23 | PART NAME:<br>6X6 三脚插件轻触按键 |                     |
|                                                                           | CHECKED BY:<br>马跃  | DATE :<br>2014-02-23 | PART NO.<br>HYC-D66XXPS    | MOLD NO.            |
| <br>UNIT: mm [inch]<br>SCALE:1:1 SIZE: A4                                 | APPROVED BY:<br>邱敏 | DATE :<br>2014-02-23 | DRAW NO:<br>HYC-2409141640 | SHEET NO.<br>1 OF 1 |