
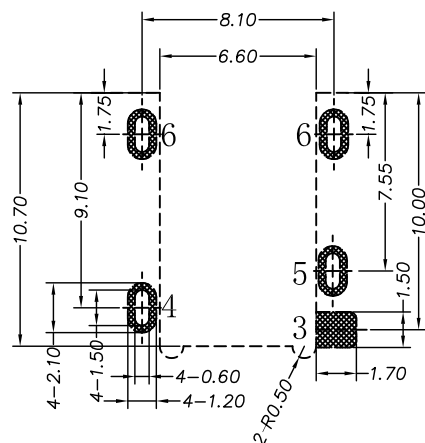
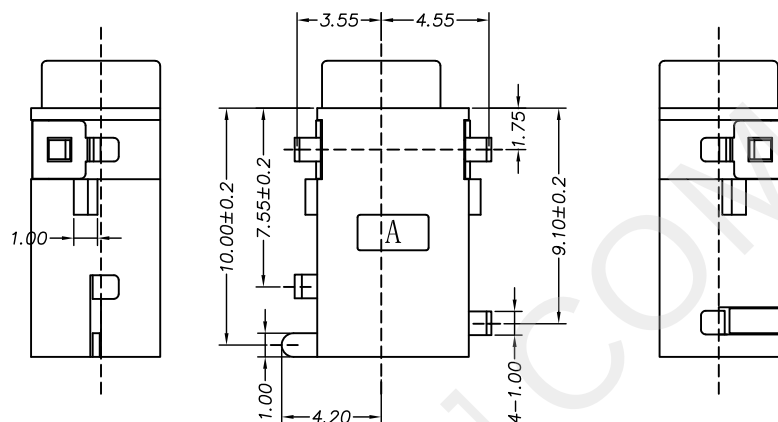
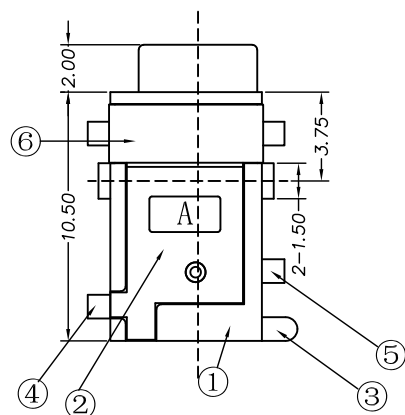


SCHEMATIC

主要技术性能	
额定电负荷	DC 30V/1A
接触电阻	$\leq 0.03\Omega$
绝缘电阻	$\geq 100M\Omega$
耐 压	AC500V (50Hz)/m
插 拔 力	3-30N
使用温度范围	-30~70℃
使用寿命	5000次

6	DC-097-06	盖脚	1	黄 铜	0.2T	镀银
5	DC-097-05	插片	1	黄 铜	0.3T	镀银
4	DC-097-04	弹片	1	磷 铜	0.2T	镀银
3	DC-097-03	圆针	1	黄 铜	0.3T	镀银
2	DC-097-02	塑盖	1	PPA(黑色)		
1	DC-097-01	基座	1	PPA(黑色)		
序号	产 品 编 号	产 品 名 称	数 量	材 料	规 格	电 镀

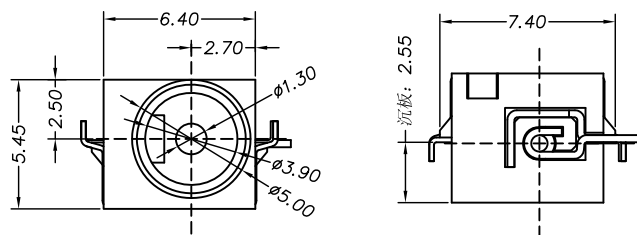

深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30	X.XX ±0.25			DC-097沉板	
X.XXX ±0.15		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-DC097-255
X: ±2°	X: ±0.5°			MOLD NO.	
		APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2409231441
UNIT: mm [inch]				SHEET NO.	1 OF 1
SCALE:1:1	SIZE: A4				