


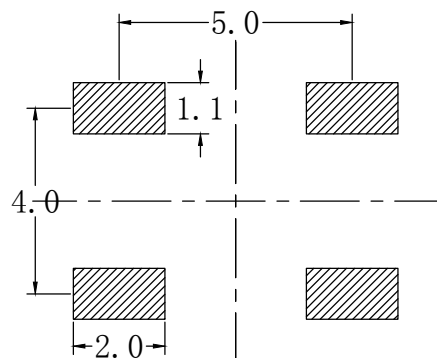
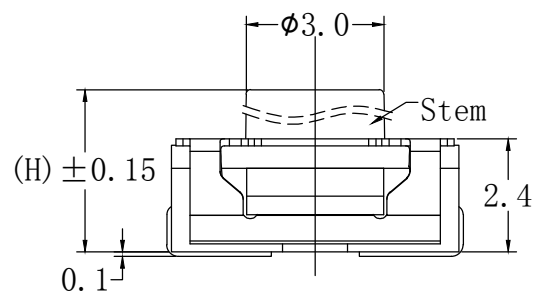


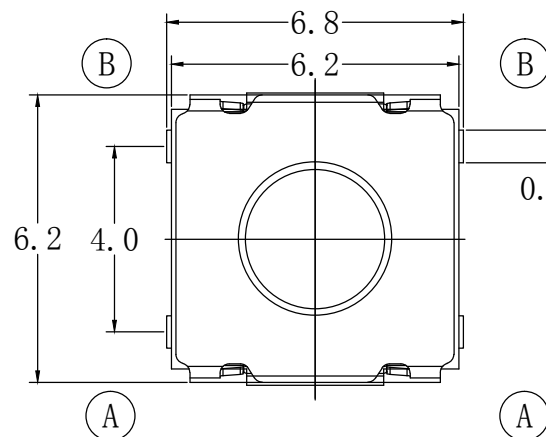

PCB.layout



Circuit Diagram

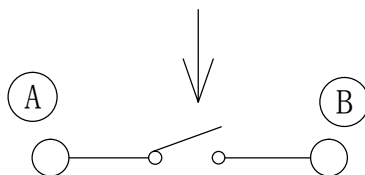

高度(H)	克力
3.1mm	180gf/260gf
3.5mm	180gf/260gf
3.8mm	180gf/260gf
4.3mm	180gf/260gf
4.5mm	180gf/260gf
5.0mm	180gf/260gf
5.5mm	180gf/260gf

SPECIFICATIONS

ELECTRICAL LIFE: 500,000 cycles min

CONTACT RESISTANCE: 100mΩ max

INSULATION RESISTANCE: 100MΩ min. 500VDC

DIELECTRIC STRENGTH: 250VAC/1 min

STORAGE TEMPERATURE: -30° C to +80° C

CONTACT ARRANGEMENT: 1 pole 1 throw

序号	零件名称	材质	数量	备注
1	底座	尼龙	1	
2	上盖	不锈钢	1	
3	弹片	不锈钢	1	
4	端子	黄铜	1	镀银
5	硅胶按柄	硅胶	1	



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 防水按键	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-F66XXW
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2508211130
SCALE:1:1	SIZE: A4			SHEET NO.	1 OF 1