
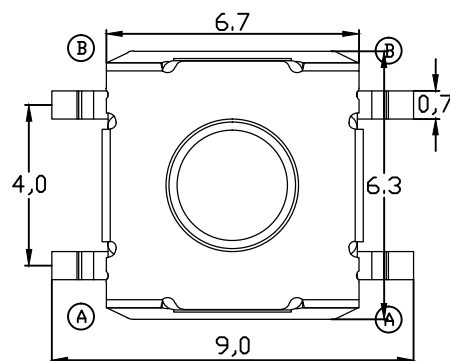
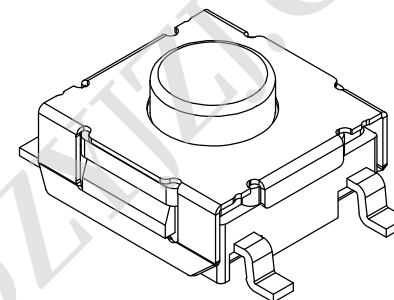

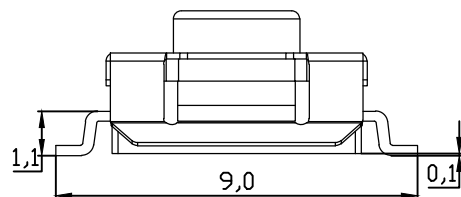


PCB.layout

Circuit Diagram



H:3.1	160gf	Tape & Reel
H:3.5	180gf	
H:3.8	260gf	
H:4.3	360gf	
H:4.5	520gf	
H:5.0		
High:	Intensity	Package Style:

SPECIFICATIONS:

- 1.RATING: DC 12V 50mA
- 2.LIFE: 500000 cycles MIN
- 3.OPERAYION FORCE: 160gf±50gf, 180gf±50gf, 260gf±50gf, 360gf±70gf, 520gf±100gf
4. STROKE:0.6±0.2mm/0.4±0.2mm
5. INITIAL CONTACT RESISTANCE:100m ohm MAX
6. DIELECTRIC STRENGTH: AC 250V 1MINUTE
7. INSULATION RESISTANCE:100m ohm MIN(DC250C MEGGER)
8. OPERATION TEMPERATURE RANGE:-40 ~+80 ℃
9. Waterproof grade IP 67



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 防水按键	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-F69XXL
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-1804241420
			SHEET NO.	1 OF 1