
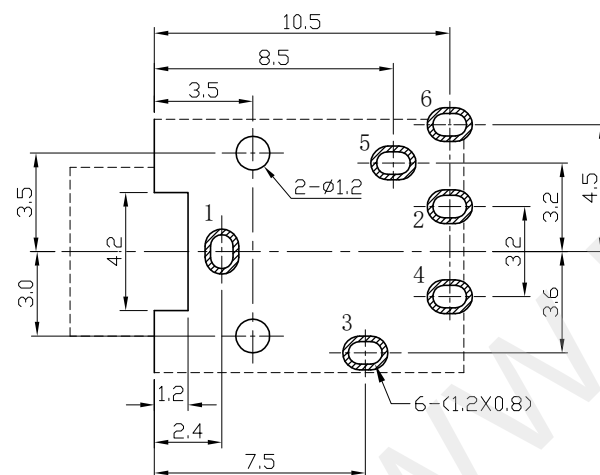
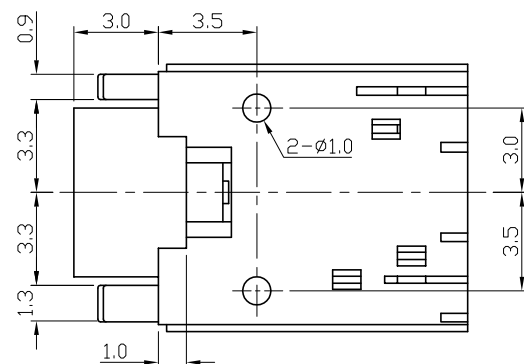
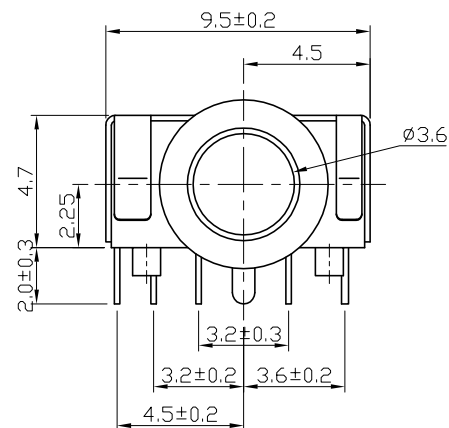
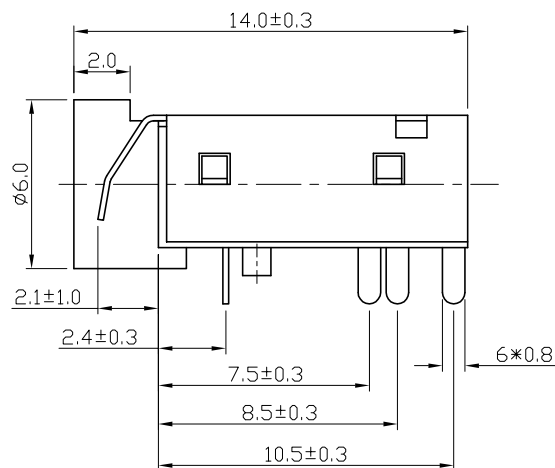
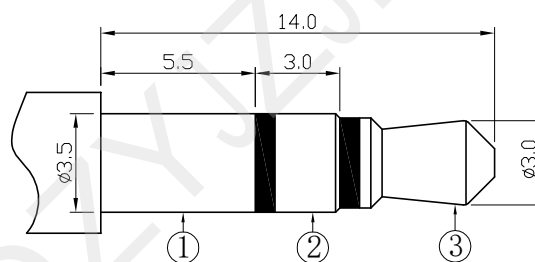
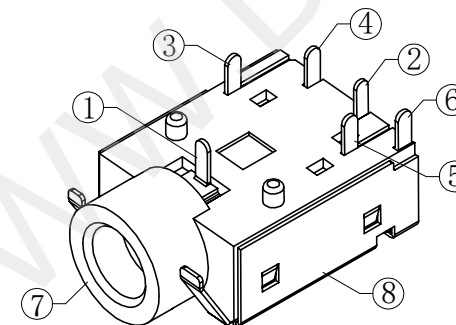


P.C.B LAYOUT
TOP VIEW

Ø3.50mm 3 POLE PLUG

SCHEMATIC

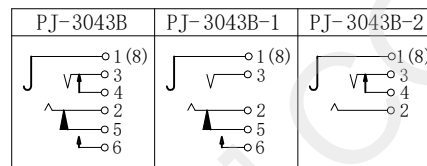

SPECIFICATION

1. Rating : DC 30V 1.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

8	COAT	1	BRONZE	Ni-Plating
7	HOUSING	1	PA9T/PBT	
6	CONTACT FOOT	1	BRONZE	Ag-Plating
5	SPRING PIECE	1	BRONZE	Ag-Plating
4	CURVE PIECE	1	BRONZE	Ag-Plating
3	SPRING PIECE	1	BRONZE	Ag-Plating
2	SPRING PIECE	1	BRONZE	Ag-Plating
1	CONTACT FOOT	1	BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5" UNIT: mm [inch] SCALE: 1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-D3043B	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-PJD3043B-143
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2210081526
			SHEET NO.	1 OF 1