

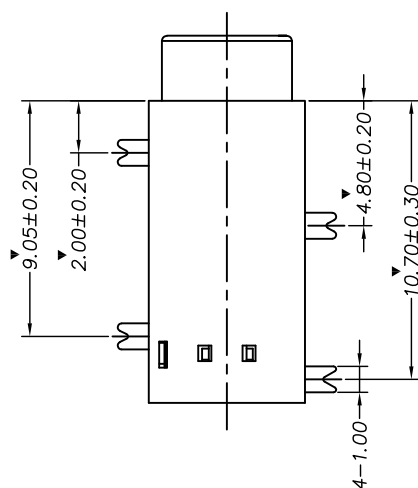
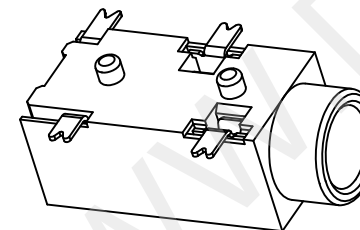

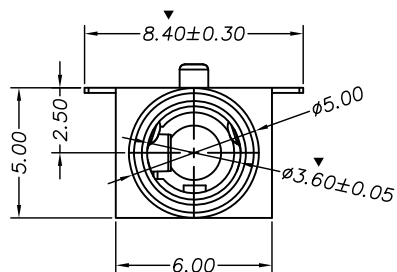



主要技术性能	
额定电负荷	DC 30V \0.5A
接触电阻	≤0.03 Ω
绝缘电阻	≥100MΩ
耐 压	AC500V(50Hz)/min
插 拔 力	3-40N
使用温度范围	-30-70

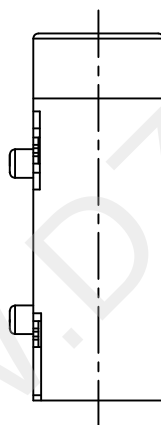

P. C. B LAYOUT TOP VIEW

4	PJ-327C-04	盖脚	1	磷铜	0.20T	镀锡
3	PJ-327C-03	弹片	1	磷铜	0.20T	镀锡
2	PJ-327C-02	中脚	2	磷铜	0.20T	镀锡
1	PJ-327C-01	基座	1	PPA		黑色
序号	产品编号	产品名称	数量	材料	规格	处理

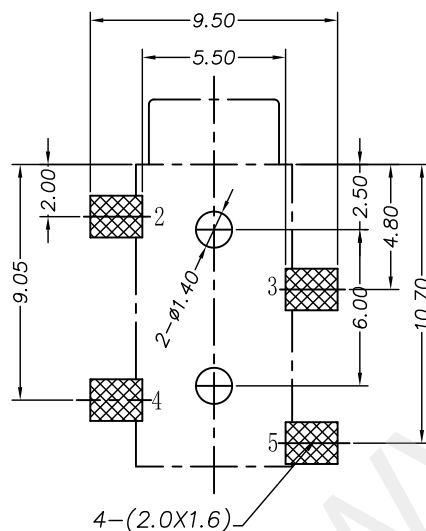

深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30				PJ-327C	
X.XX ±0.25		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-PJ327C-141
X.XXX ±0.15				MOLD NO.	
X.* ±2* X.* ±0.5*		APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2302251727
 				SHEET NO.	1 OF 1
UNIT: mm [inch]					
SCALE: 1:1	SIZE: A4				