


技术要求:

1. 温度范围: $-25\sim 70^{\circ}\text{C}$
2. 接触电阻: $\leq 0.02\Omega$
3. 绝缘电阻: $\geq 100\text{M}\Omega$
4. 耐压: $\text{AC}500\text{V}(50\text{Hz})/\text{min}$
5. 拉线力: $3\sim 25\text{N}$
6. 寿命: 10000次

3	插针	2	铜	镀铜锡
2	按籽	2	ABS	红黑/黑红
1	基座	1	ABS	黑色
序号	名称	数量	材料	备注

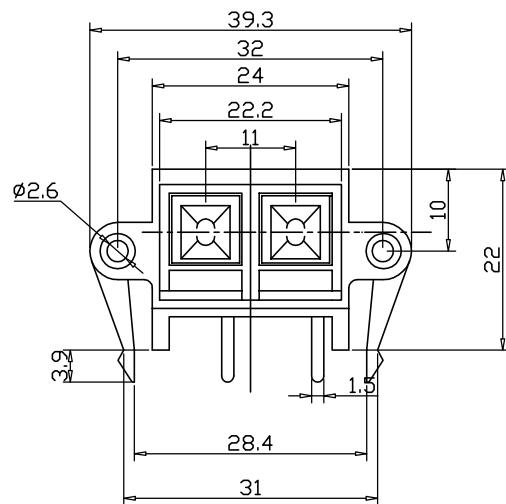

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$ UNIT: mm [inch] SCALE: 1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: WP 插座	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-WP2-2B	
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2409071045	
			SHEET NO. 1 OF 1	