
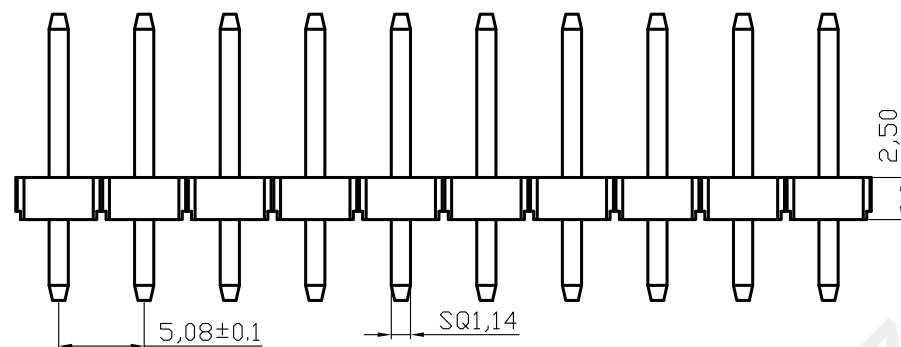


RECOMMEND P. C. B LAYOUT

PCB TOLERANCE: ± 0.05 (TOP VIEW)

SPECIFICATIONS

Current Rating: 7Amps
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: LCP
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Sn Over Ni
Max. Processing Temp: 240° C for 30-60 seconds
(260° C for 5 seconds)

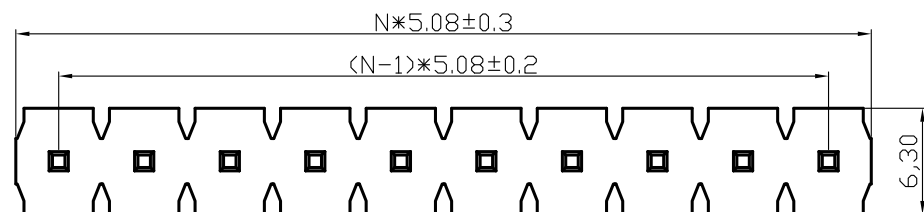

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X" ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 5.08PH H2.5 1xN Pin 180度 L17.0	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCO-25M508-1XX-1700	MOLD NO.
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2208031923	SHEET NO. 1 OF 1
	SCALE: 1:1	SIZE: A4		