





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)**Technical Specs:**

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass
Contact clip(4/6 finger):	Beryllium copper(C17200)/Phosphor Bronze
Accepted pin:	Ø0.40 to 0.56mm
Forces:	(polished steel gauge Ø0.43mm)
--Insertion	2 N typ
--Withdrawal	1 N typ
Mechanical life:	min500 cycles
Rated current:	3A
Contact resistance:	max 10mΩ
Dielectric resistance:	Min 1000V RMS
Max.Processing Temp:	230°C for30-60 seconds (260°C for 10 seconds)

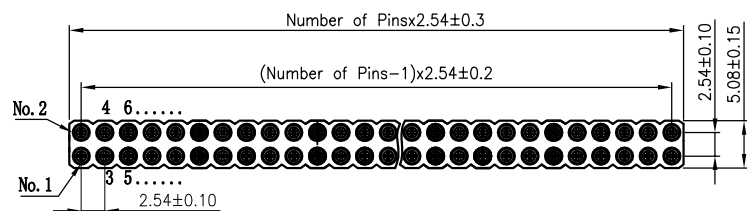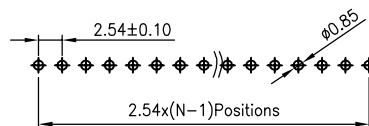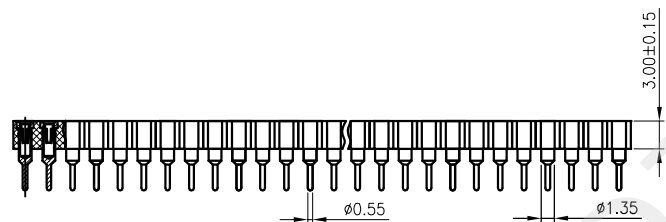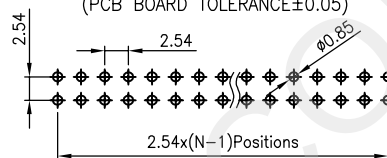

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 2.54X3.0圆孔母座 180 ° L=7.43
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC0-30D254-XXX-743
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2107311312 SHEET NO. 1 OF 1