
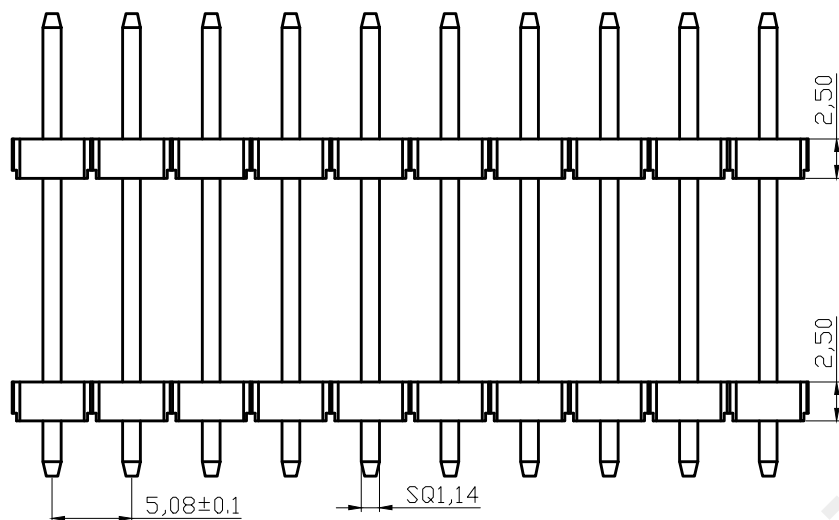
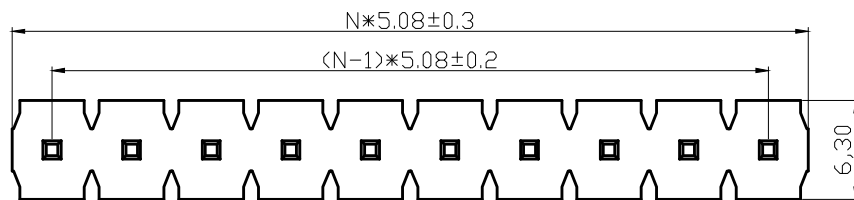


SPECIFICATIONS

Current Rating: 7Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: LCP
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Sn Over Ni
Max. Processing Temp: 240° C for 30-60 seconds
(260° C for 5 seconds)

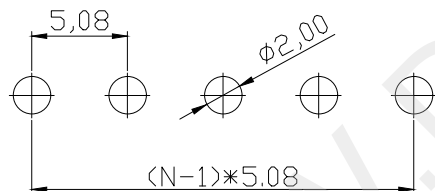

RECOMMEND P. C. B LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

CHECKED BY:

马跃

DATE:

2014-02-23

APPROVED BY:

邱敏

DATE:

2014-02-23

PART NAME: 5.08PH H2.5 1xN Pin

180度 PC3.5 PA8.0 PB18.0 L29.5双塑

PART NO.

HYC0-50M508-1XX-2950

MOLD NO.

DRAW NO:

HYC-2210251659

SHEET NO.

1 OF 1