


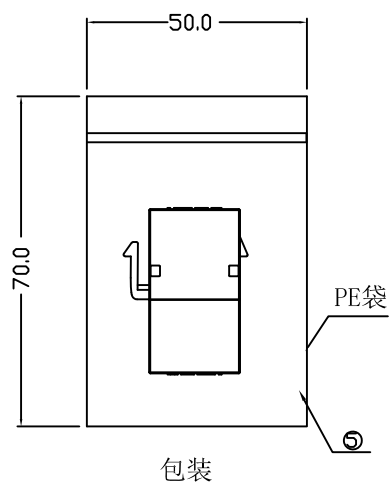

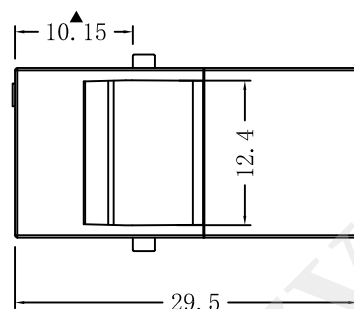


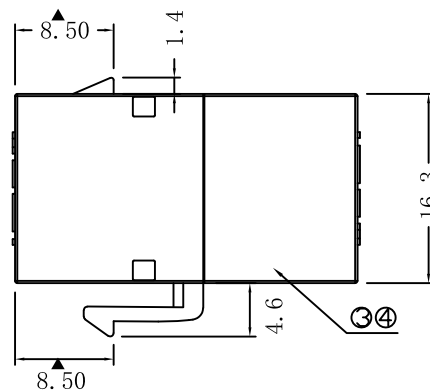

CN1

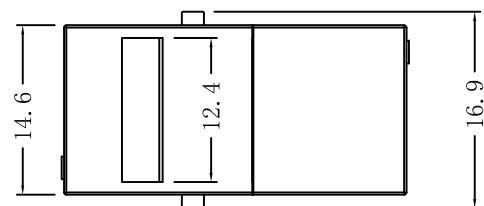


CN2



Contact List

CN1	CN2
01	01
02	02
03	03
04	04
05	05
06	06
07	07
08	08
09	09
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
SHELL	SHELL

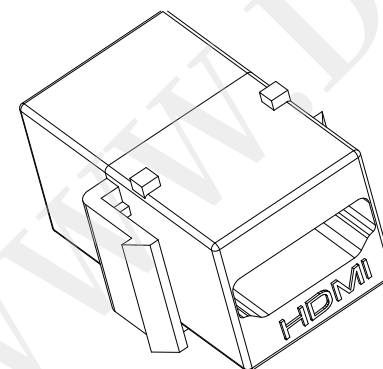

Note:

- 100% short & fault line test conditions;
- Conduction impedance $\leq 10 \Omega$, insulation impedance $\geq 3M \Omega$. High pressure test, DC 300 v / 10 ms.
- The product USES the PCB connection, compliance with version 2.0 specification.
- Marked ▲ the major size.
- Packing: 1pcs/PE bag

5	package	Transparent	1PCS
4	Shape	Black	2PCS
3	Inner Connect	PCB T=1.6MM	1PCS
2	Connector1	Iron Shell with gold plated PIN gold plated	1PCS
1	Connector2	Iron Shell with gold plated PIN gold plated	1PCS
序号	名称	材料	用量



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDMI 母转母
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC03-HDMI-295
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO: HYC-2211081447
			SHEET NO. 1 OF 1