
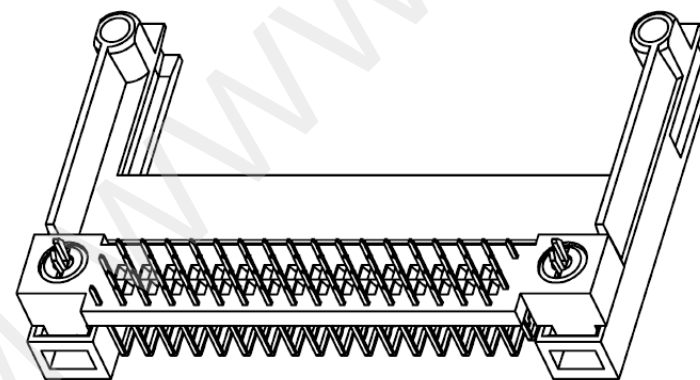
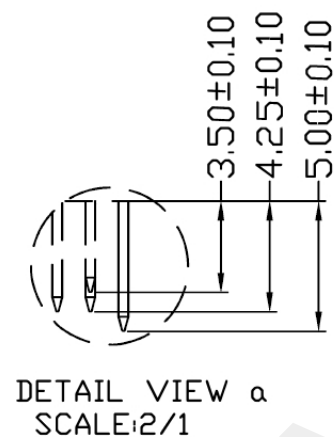
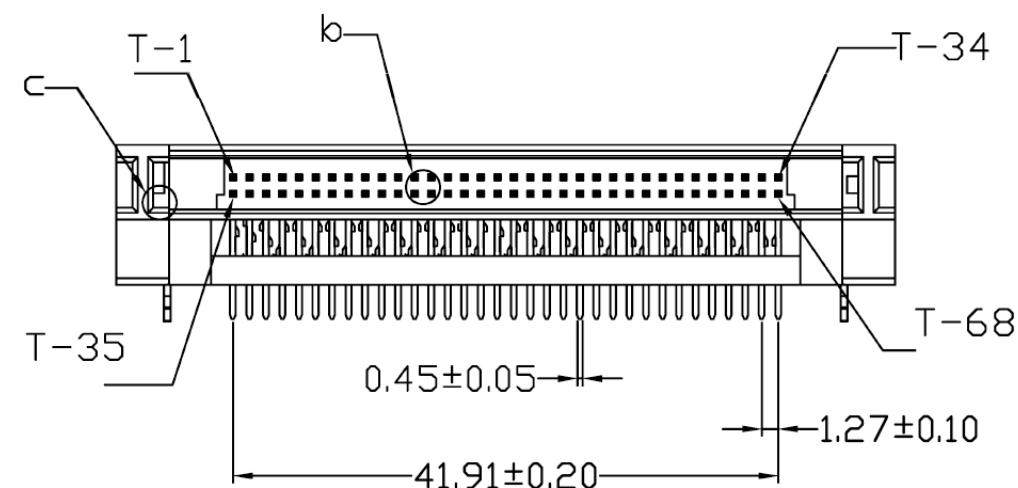
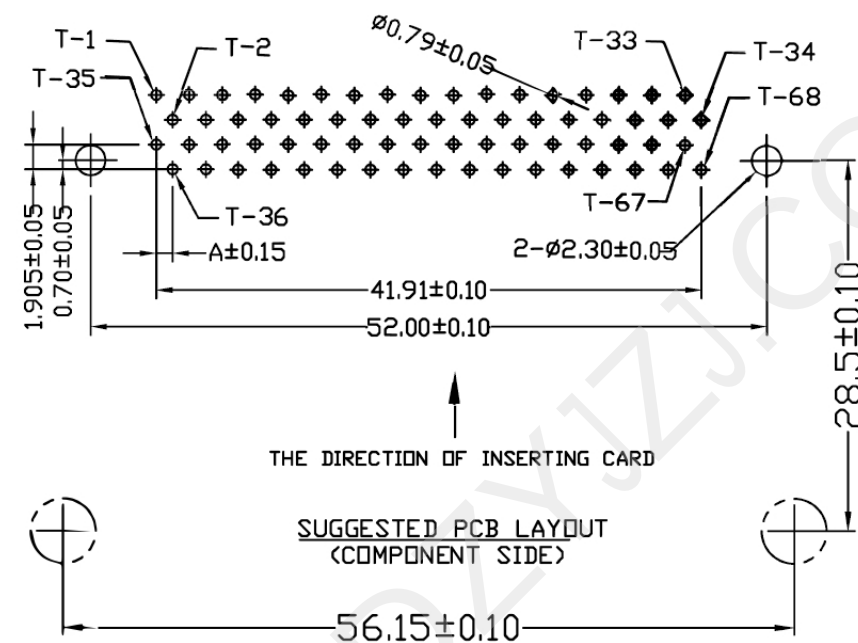
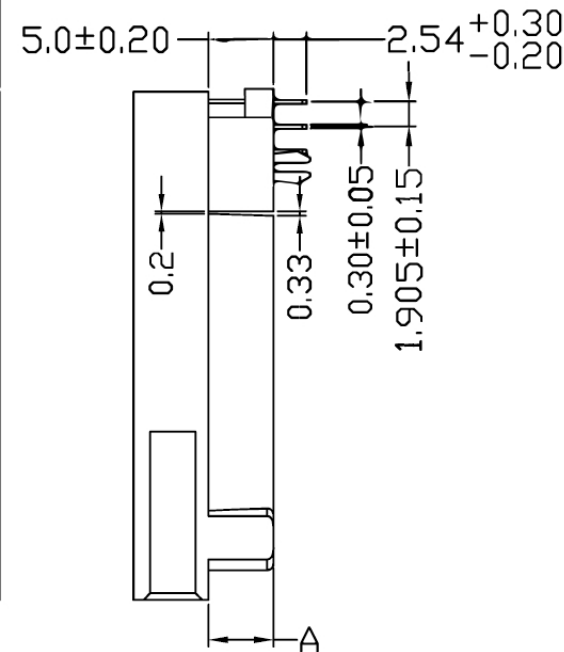


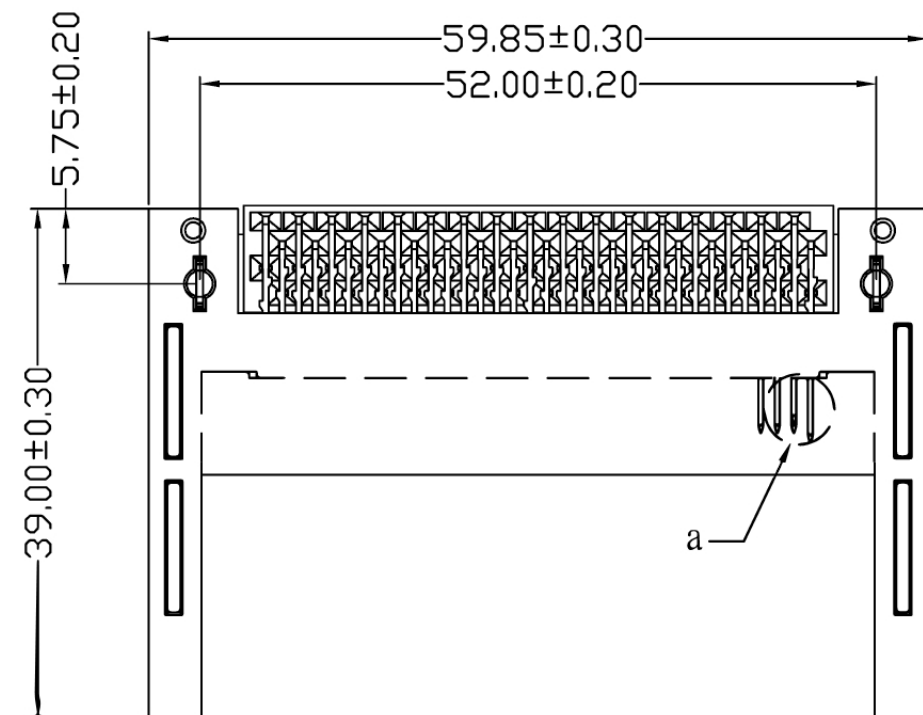

SPECIFICATION:

1. PC-PCMCIA;
2. G-WITH GUIDE; C-WITHOUT GUIDE;
R-RIGHT EJECTION BAR;
L-LEFT EJECTION BAR;
3. L-UP AND DOWN WITH THE PLASTIC
SUPPORT PIECE OF THE MAIN; FRONT 2.3MM
LATCH, BACK WITH STAND OFF POLE
4. 1-SINGLE STACK; 2-DOUBLE STACK;
5. D-DIP TYPE; S-SMT STACK;
6. DIMENSION A;
7. PRODUCT CODE: B=1.1MM 0=VOLTAGE 5V
B=2.2MM V=VOLTAGE 3.3V
8. GOLD PLATING OF CONTACTS:
03-1u"(G/F) 05-5u" 10-10u" 15-15u"
A-----HALF GOLD TIN
9. A----NO MARK
1----ALL PLASTIC PADDING
10. 03----THICKNESS OF THE TERMINAL IS 0.03MM.

2.MATERIAL:

INSULATOR: PBT UL94V-0 BLACK
CONTACTS: COPPER ALLOY
GOLD PLATED ON CONTACT AREA
TIN PLATED ON SOLDER TAIL




3.ELECTRICAL:

CURRENT RATING: 0.5A AC, DC
TEMPERATURE RANGE: -20°C ~ +60°C
INSULATION RESISTANCE: 1000MΩ MIN(500V DC)
CONTACT RESISTANCE: 40mΩ MAX.
WITHSTANDING VOLTAGE: 500V AC/MINUTE

Pin Type	Interface Dim.	Pin No.
Detect	3.50 mm	36, 67
General	4.25 mm	all other pins
Power	5.00 mm	1, 17, 34, 35, 51, 68

Ordering Information

A	DIM. B = 1.1 mm (0) Voltage 5V	DIM. B = 2.2 mm (V) Voltage 3.3V
	(J) A = 5.0mm	
	HYC04-PCA68-110	HYC04-PCA68-220

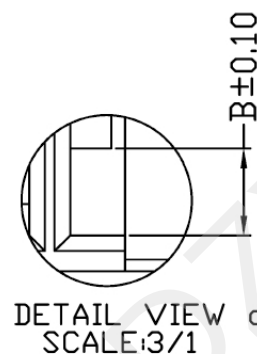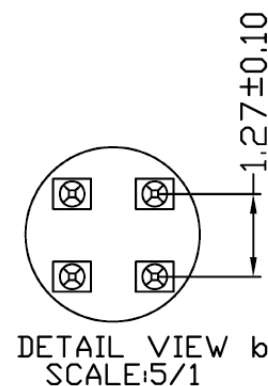

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PCMCIA 卡座 单层无支架垫高5.0	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC04-PCA68-XXX
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2211101557
			SHEET NO.	1 OF 1