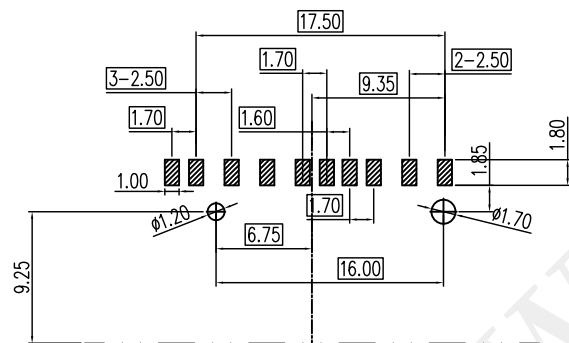

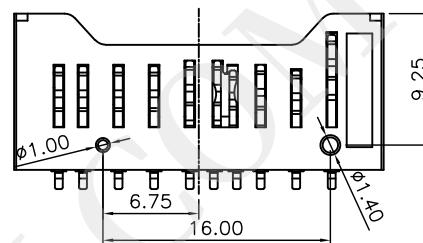

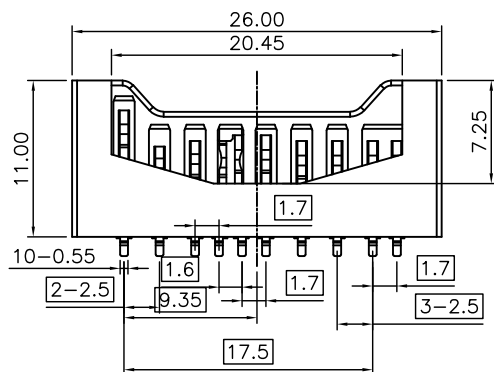


3D VIEW

RECOMMENDED PCB LAYOUT(.XX±0.05)
CONNECTOR SIDE(TOP VIEW)FRONT EDGE
OF PCB

SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX&1A
- 1-2. CONTACT RESISTANCE: 40mΩ MAX INITIAL.
- 1-3. INSULATION RESISTANCE:
1000MΩ MIN FOR VOLTAGE 500VDC.
- 1-4. DIELECTRIC WITHSTAND: 500V AC for 1 MINUTE
- 1-5. OPERATING TEMPERATURE: -30°C~+85°C

2. MECHANICAL CHARACTERISTICS:

- 2-1. LIFE TEST :500 CYCLES



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SD 简易全塑
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC110-SD10-345
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2510270947
			SHEET NO. 1 OF 1