
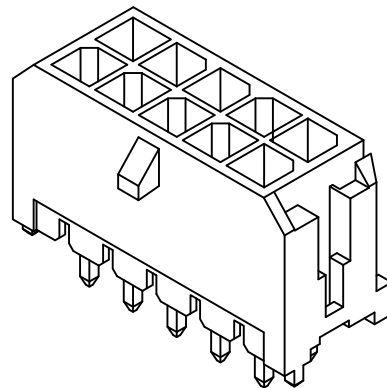


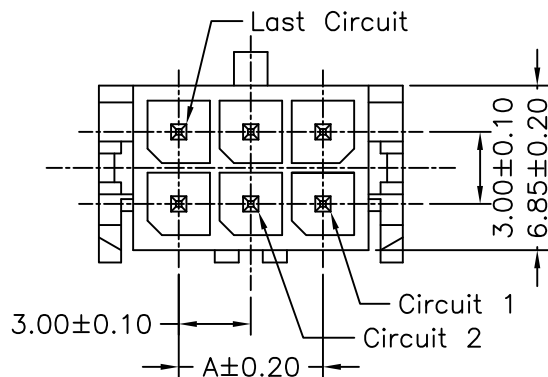

SPECIFICATIONS

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: $10\text{m}\Omega$ MaxInsulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated

Material: PA66,UL94V-0

Color: Natural


Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
2X01P	---	6.65
2X02P	3.00	9.65
2X03P	6.00	12.65
2X04P	9.00	15.65
2X05P	12.00	18.65
2X06P	15.00	21.65
2X07P	18.00	24.65
2X08P	21.00	27.65
2X09P	24.00	30.65
2X10P	27.00	33.65
2X11P	30.00	36.65
2X12P	33.00	39.65



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$ 

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

3030 3.0PH 180度直针

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC114-WF2XN-300

MOLD NO.

APPROVED BY:

柯南

DATE :

2014-02-23

DRAW NO:

HYC-180610035

SHEET NO.

1 OF 1

