
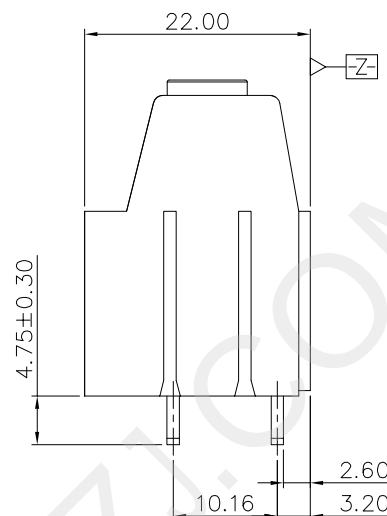
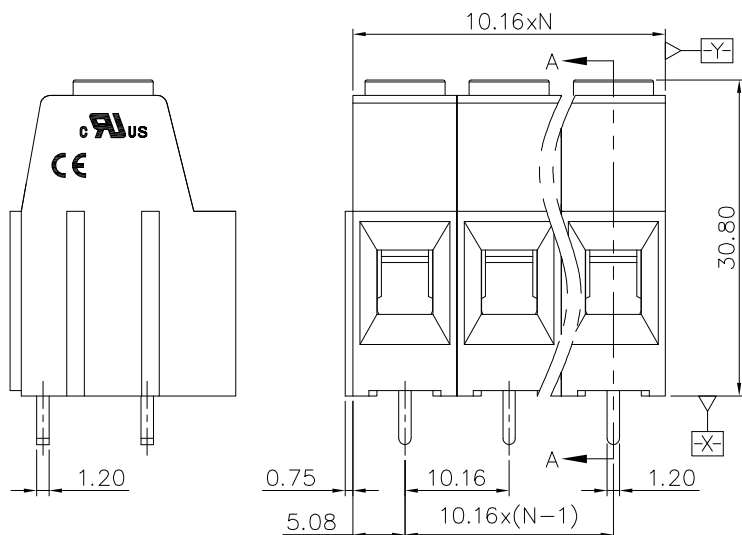


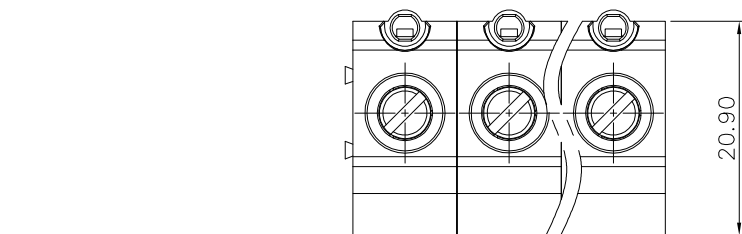

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 60A
2. Torque value : M4 , 10.53Lb.in
3. Wire range : 20~6AWG

IEC Standard


1. Rated voltage/current : 1000V/65A
2. Torque value : M4 , 1.2N·m
3. Wire range : 2.5~16mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.16mm, Poles : N=01~12P
3. Stripping length : 10~11mm
4. Withstanding voltage : AC3500V/1Min
5. Operating temperature: -40°C~+105°C
6. Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						-	∩	□
TO	Over	Over	TO	Over	Over	Over	Over	Over	0.1/10		
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150		<		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'			

7. RoHS Compliance

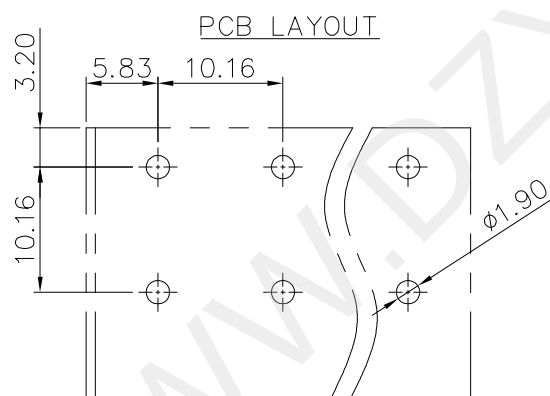

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 螺钉式接线端子 10.16PH直针
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.: HYC131-JXDXX-1016
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.:
	UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAW NO.: HYC-2210251153	SHEET NO.: 1 OF 1