


NOTE:

1. MATERIAL:
HOUSING: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.
CONTACTS: BRASS.
BOARDLOCKS: BRASS.
2. FINISH:
CONTACTS: GOLD FLASH PLATED ON CONTACT AREA, [100μ"] MIN..
BRIGHT-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT
UNDERPLATED [50μ"] MIN.. NICKEL.
BOARDLOCKS: [100μ"] MIN. BRIGHT-TIN OVER[50μ"] MIN.
NICKEL ON ENTIRE BOARDLOCK.

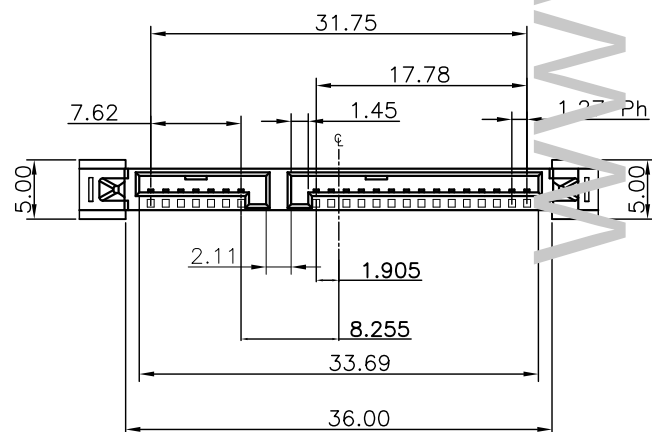

深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30				SATA 7+15P 双排脚 180° 带鱼叉	
X.XX ±0.25		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC144-SATA22-900
X.XXX ±0.15				MOLD NO.	
X.* ±2°	X.X* ±0.5°	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2509171456
				SHEET NO.	1 OF 1
UNIT: mm	[inch]				
SCALE:1:1	SIZE: A4				