


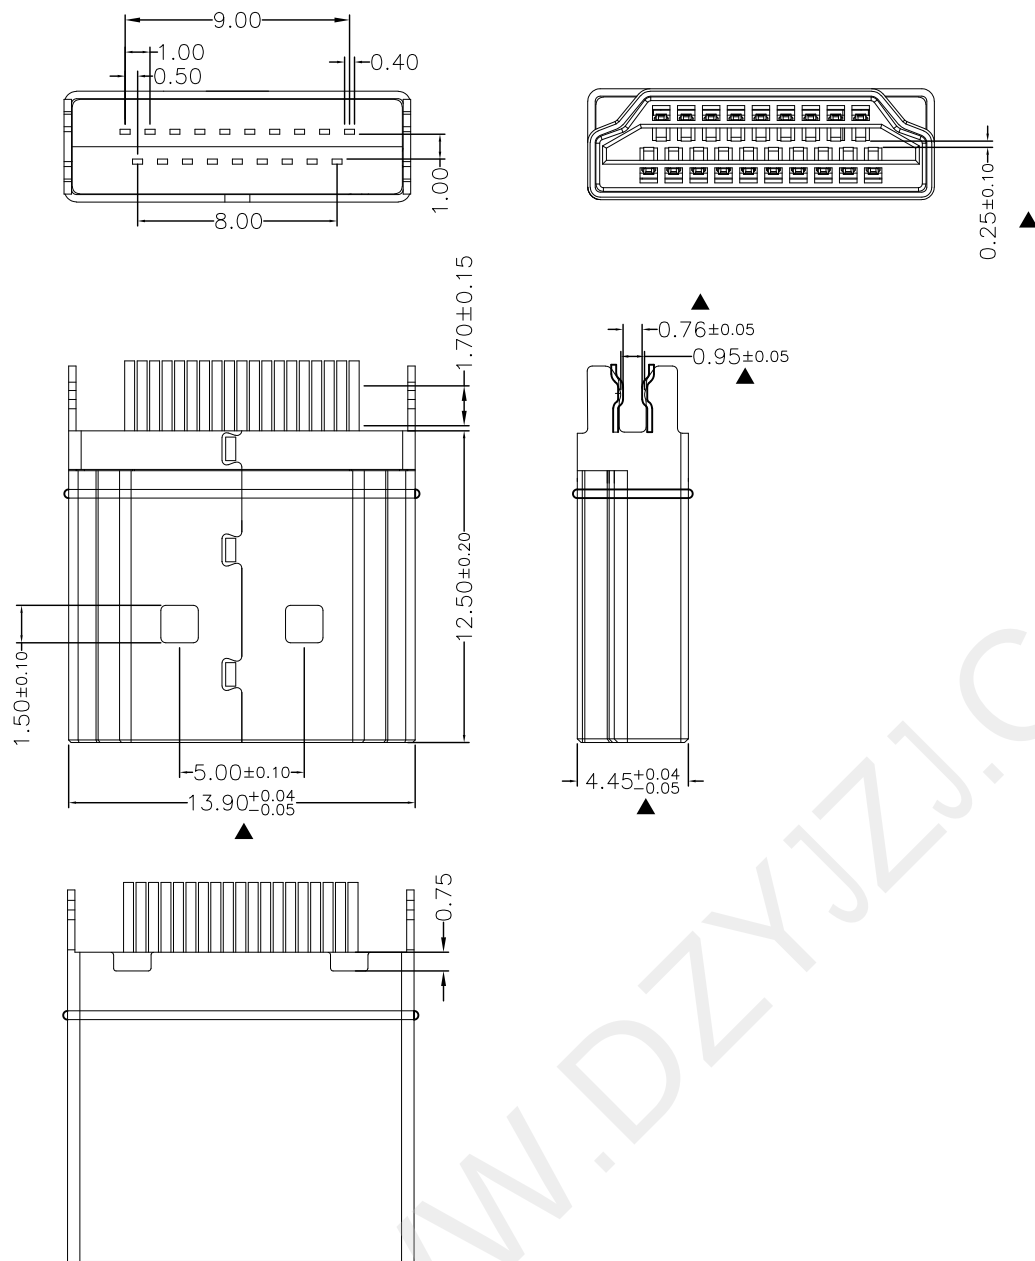

## NOTE :

## 1. SPECIFICATION:

- 1.1. CURRENT RATING: 0.5 Amp Max.
- 1.2. VOLTAGE RATING: 40 V ac(r.m.s) Max.
- 1.3. CONTACT RESISTANCE: 10m ohms Max.mated
- 1.4. INSULATION RESISTANCE:100M ohms Min.
- 1.5. DIELECTRIC WITHSTANDING VOLTAGE:  
AC 500V Min. (for 1 minute)

- 1.6. OPERATION TEMPERATURE RANGE:-25° C~85° C

## 2. MECHANICAL

- 2.1. INSERTION FORCE:4.5KGF MAXMUM
- 2.1. WITHDRAWAL FORCE:1.0KGF MINIMUM;4.0KGF MAXMUM
- 2.3. DURABILITY:10000 CYCLES AT 100±50 CYCLES PERHOUR, CONTACT CHANCE FROM INITIAL VALUE:30MINI Ohms MAX

"▲" 为品管重点管控尺寸



深圳市华宇创精密电子有限公司

|                                                                            |                    |                      |                                        |                     |
|----------------------------------------------------------------------------|--------------------|----------------------|----------------------------------------|---------------------|
| TOLERANCE:<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X." ±2" X.X" ±0.5" | DRAWN BY :<br>陈一鸣  | DATE :<br>2014-02-23 | PART NAME:<br>HDMI A TYPE 公座夹板1.0 有筋弯针 |                     |
|                                                                            | CHECKED BY:<br>马跃  | DATE :<br>2014-02-23 | PART NO.<br>HVC146-HDMI A19-100        | MOLD NO.            |
| <br>UNIT: mm [inch]<br>SCALE:1:1 SIZE: A4                                  | APPROVED BY:<br>邱敏 | DATE :<br>2014-02-23 | DRAW NO:<br>HVC-2303041022             | SHEET NO.<br>1 OF 1 |
|                                                                            |                    |                      |                                        |                     |