



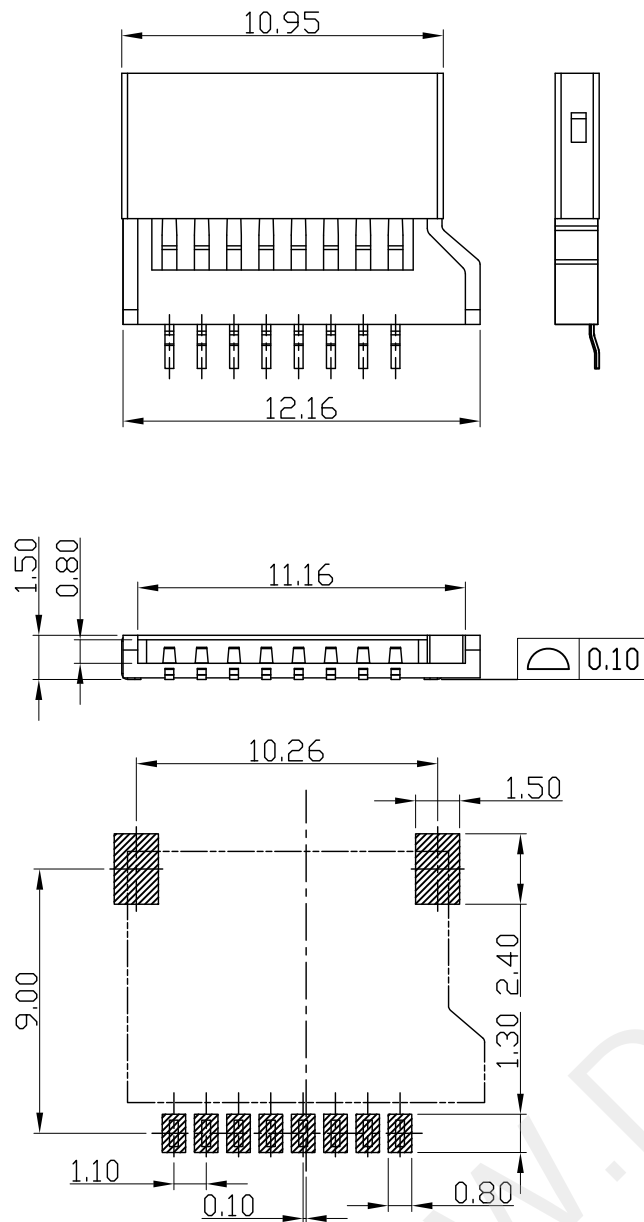

RECOMMENDED PCB LAYOUT
(Witchout Post)

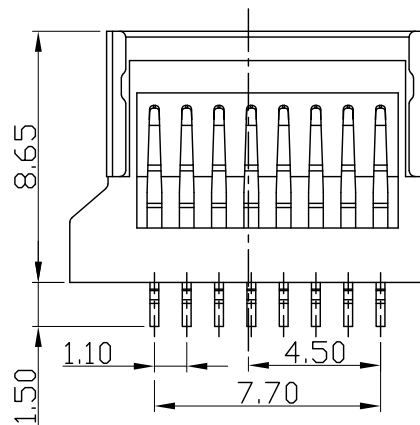

SPECIFICATION

1. MATERIAL

HOUSING:HI-TEMP PLASTIC UL 94V-0;BLACK

CONTACT:COPPER ALLOY

SHELL:STAINLESS STEEL

2. ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING:0.5 AMPERES.

DIELECTRIC WITHSTANDING VOLTAGE:AC500V R. M. S.

INSULATION RESISTANCE:500 M Ω MIN.

CONTACT RESISTANCE:40 M Ω MAX.

3. ENVIRONMENTAL

OPERATING TEMPERATURE:-25° C~+90° C

4. ENVIRONMENTAL

MATING CYELES:3000 INSERTIONS

5. MECHANICAL CHARACTERISTICS

CARD PUSH INSERTION/OUT FORCE:0.7~1.20KGF

CONTACT SEPARATION FORCE:0.20KGF MIN.

3	SHELL	1	STAINLESS STEEL	Ni: 50u*Min.Overall Au: 1u"	t=0.15
2	CONTACT	1	COPPER ALLOY	Ni: 50u*Min.Overall Au: 1u"	t=0.15
1	HOUSING	1	THERMOPLASTIC	UL94 V-0, COLOR:BLACK	
ITEM	NAME	Q'TY	MATERIAL	FINISH	REMARK



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30

X.XX ± 0.25

X.XXX ± 0.15

X.* $\pm 2^{\circ}$

X.X* $\pm 0.5^{\circ}$

UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

TF卡座 抽屉式1.5H 无柱

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC169-TF08-150

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2409041510

SHEET NO.

1 OF 1