

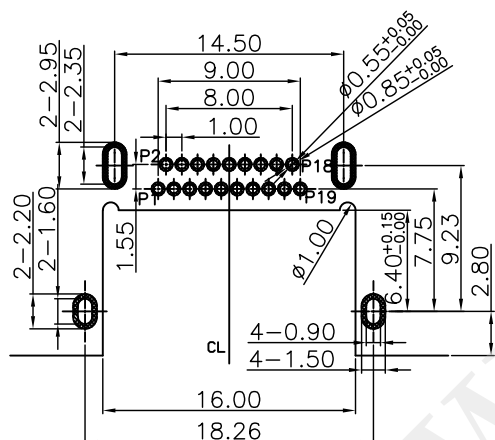
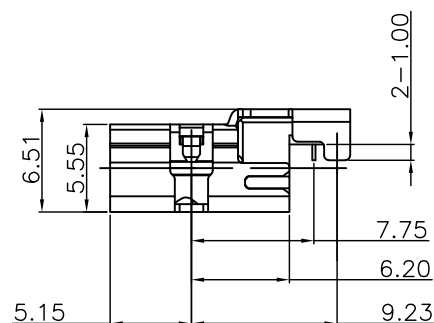
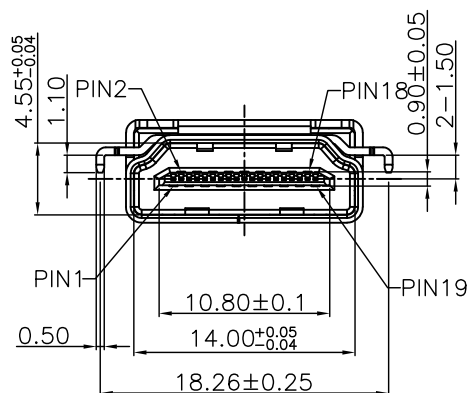

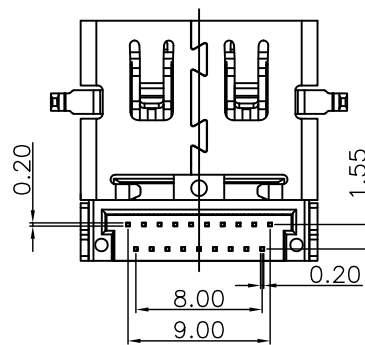


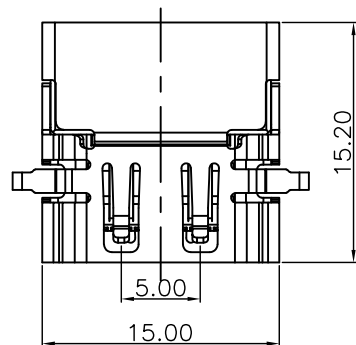

TOLERANCE: ± 0.05 , THICKNESS: 1.0mm
RECOMMENDED PCB LAYOUT
 (TOP VIEW)
 KEEP OUT AREA

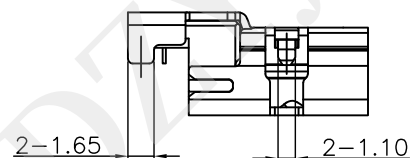

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE: 100M MIN. @ 500V DC
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 4.5KGF MAX.
 - 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.
3. LIFE TEST: 10000 CYCLES
4. OPERATING TEMPERATURE: -25°C TO +85°C

C	SHELL	1	C2680R-H T=0.5MM, Ni 50u"MIN.NICEL ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	HDMI A TYPE 反向沉板DIP 加高	
X.XX ±0.25		CHECKED BY:	DATE :	PART NO.	HYC174-HDMI A19-152
X.XXX ±0.15				MOLD NO.	
X: ±2° X.X ±0.5°		马跃	2014-02-23	DRAW NO:	HYC-2409181725
				APPROVED BY:	DATE :
UNIT: mm [inch]		邱敏	2014-02-23	1 OF 1	
SCALE:1:1	SIZE: A4				