
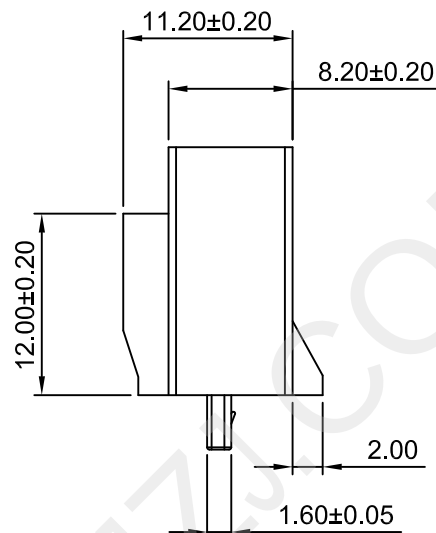
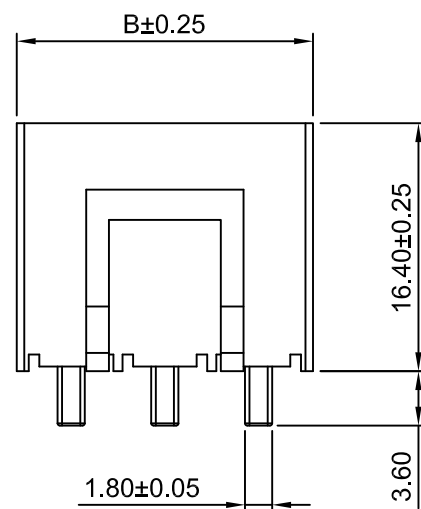
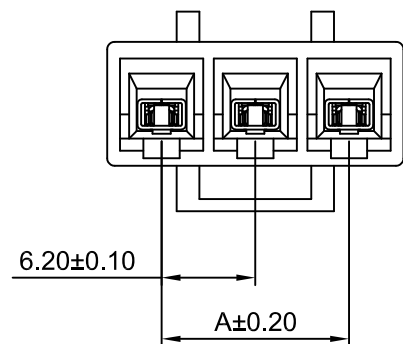


PART NO.	Dimensions(mm)	
	A	B
2P	6.20	13.40
3P	12.40	19.60
4P	18.60	25.80

Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 23A AC / DC
- Withstanding voltage: 2000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 20m\Omega$
- Pin Material :Brass
- Mates With CJST Housing:6201HG

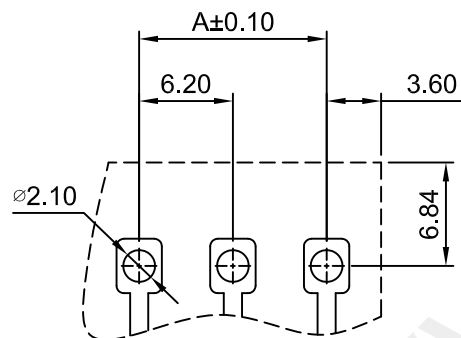

P.C.B LAYOUT
TOLERANCE:±0.05



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 6.2PH 直针带扣	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC218-NA-620	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2210261155	
			SHEET NO. 1 OF 1	