

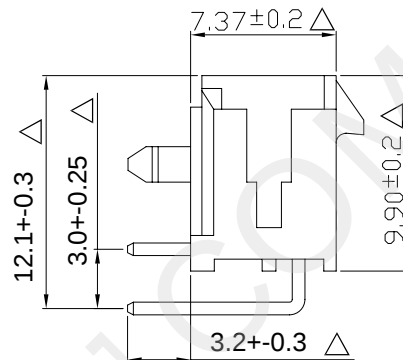
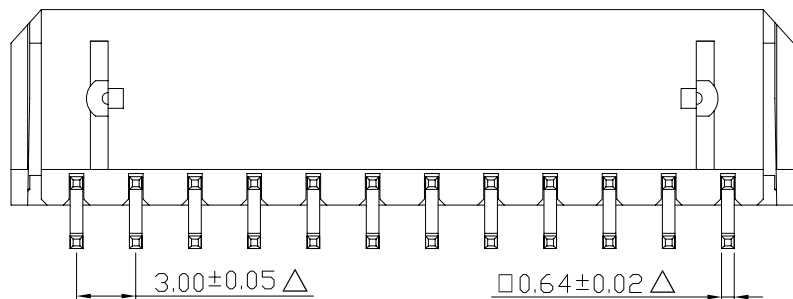


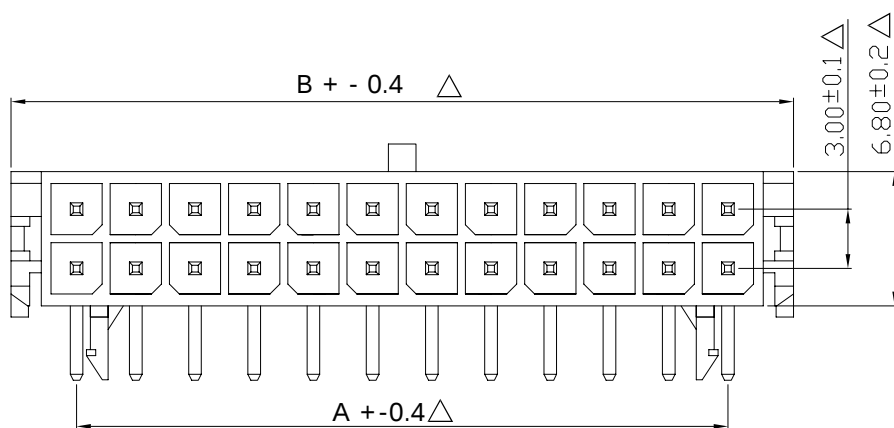

Circuits	Dimensions	
	A	B
2*01	—	6.65
2*02	3.00	9.65
2*03	6.00	12.65
2*04	9.00	15.65
2*05	12.00	18.65
2*06	15.00	21.65
2*07	18.00	24.65
2*08	21.00	27.65
2*09	24.00	30.65
2*10	27.00	33.65
2*11	30.00	36.65
2*12	33.00	39.65

SPECIFICATIONS

Current rating	:5A AC, DC
Voltage rating	:250V AC, DC
Temperature range	: -25°C ~ +105°C
Contact resistance	:10mΩMax
Insulation resistance	:1000MΩ Min
Withstanding voltage	:1500 VAC/minute
Contact Material	:Brass
Finished	:Tin-plated

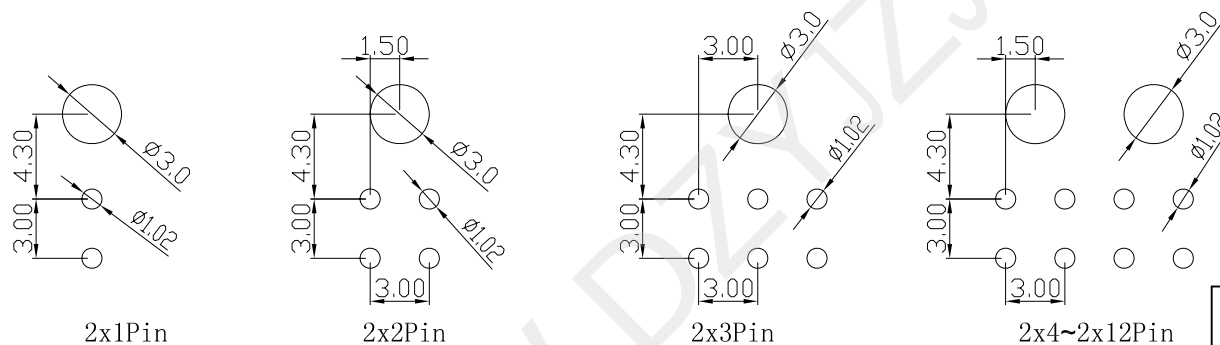

P. C. B LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 3.0PH 2XNpin 弯针带柱
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC225-WF2XN-300
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2303011945
			SHEET NO. 1 OF 1