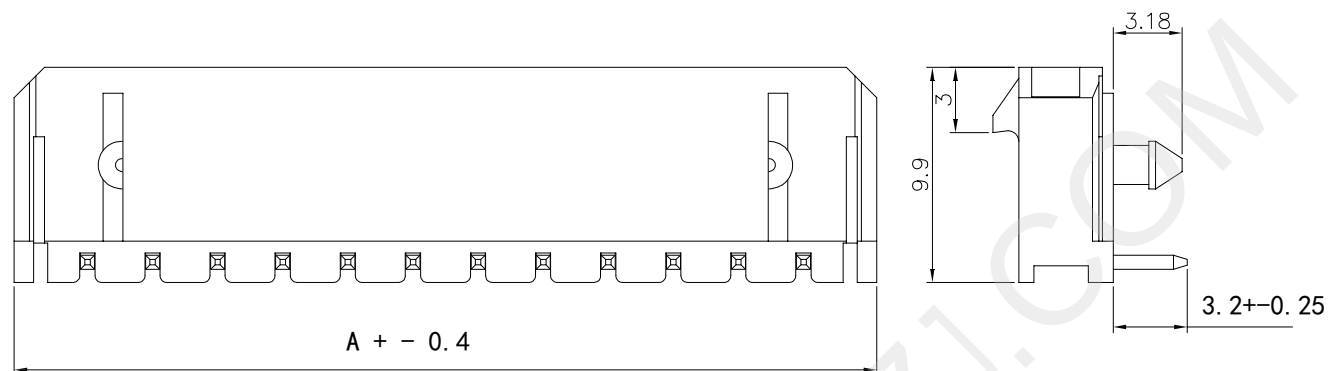
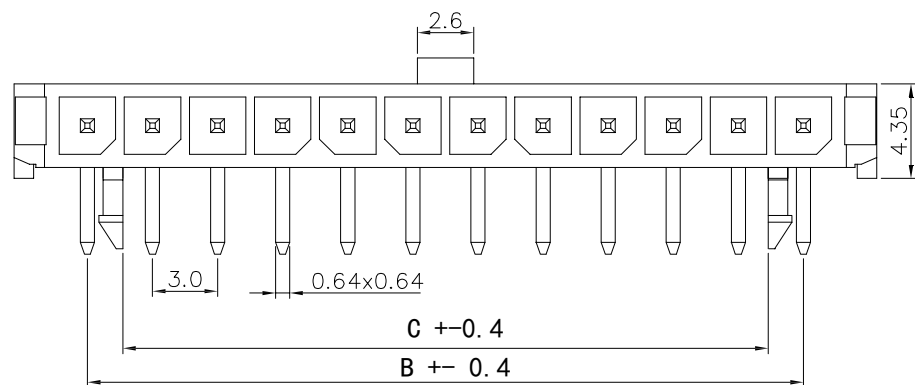


P. C. B Layout

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
01P	6.85	0.00	1.00
02P	9.85	3.00	1.00
03P	12.85	6.00	1.00
04P	15.85	9.00	5.50
05P	18.85	12.00	8.50
06P	21.85	15.00	11.50
07P	24.85	18.00	14.50
08P	27.85	21.00	17.50
09P	30.85	24.00	20.50
10P	33.85	27.00	23.50
11P	36.85	30.00	26.50
12P	39.85	33.00	29.50

SPECIFICATIONS

Current Rating: 5A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: $-50^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 20mW Max.
Insulation Resistance: 1000MW Min.
Withstanding Voltage: 550V AC/minute
Pin Material: Brass/Gold-plated



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 3.0PH 弯针带柱	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC226-WFN-300
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2303021109
UNIT: mm [inch] SCALE:1:1 SIZE: A4			SHEET NO.	1 OF 1