
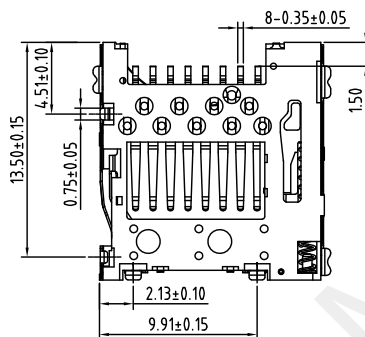
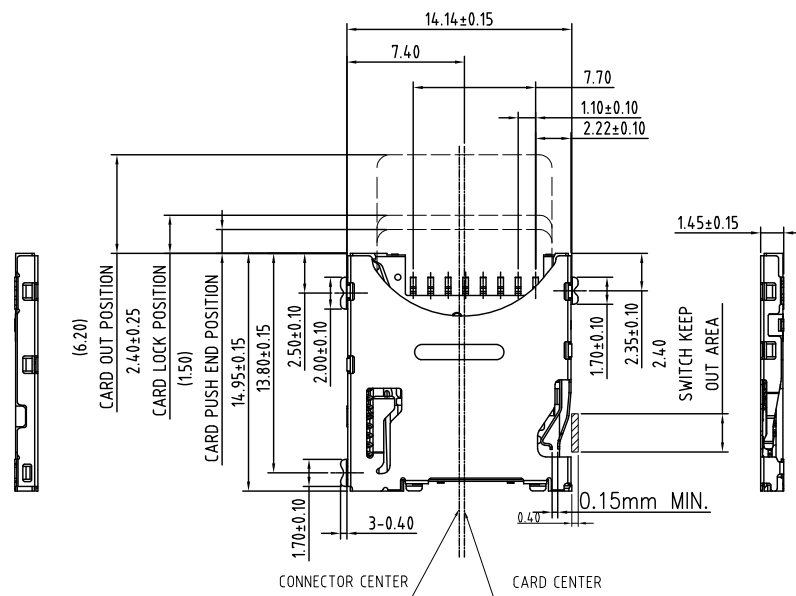


7	DETECT	1	C5210.30u" NI UNDERLAPPED OVERALL
6	TERMINAL	1	G/F PALTED ON CONTACT AREA
5	HOUSING	1	80u" MATTE TIN PLATED ON SOLDER AREA
4	SLIDER	1	LCP UL94V-0, BLACK
3	SPRING	1	LCP UL94V-0, BLACK
2	CAM FOLLOWER	1	SWP
1	SHELL	1	SUS304
NO.	PART NAME	Q'TY	DESCRIPTION
			SUS304, G/F PLATED OVER 30u" NI ON SOLDER AREA

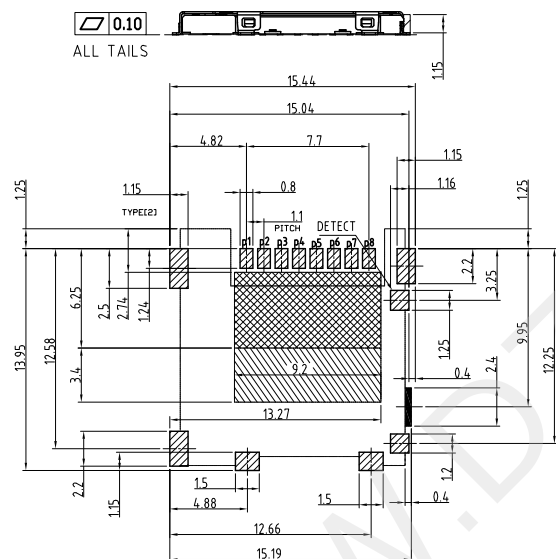

RECOMMENDED PCB PATTERN LAYOUT(TOP VIEW)
TOLERANCE: ± 0.05

 SOLDERPROHIBITED AREA PROHIBITED AREA PATTERN PROHIBITED AREA


TERM 1	DATA 2
TERM 2	CD/DATA 3
TERM 3	CMD
TERM 4	VDD
TERM 5	CLK
TERM 6	VSS
TERM 7	DATA 0
TERM 8	DATA 1

- NOTES:
1. COPLANARITY SPEC. FOR ALL SOLDER TAILS AND SOLDER PADS IS 0.1mm MAX.
 2. ELECTRICAL CHARACTERISTICS:
 - 2-1. CURRENT RATING: 0.5 Amp. MAX.
 - 2-2. VOLTAGE: 100V DC. MAX.
 - 2-3. LOW LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
 - 2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
 - 2-5. INSULATION RESISTANCE: (INITIAL) 1000Mohms MIN. (FINAL) 100Mohms MIN.
BY APPLYING 500V DC ON MATED AND UNMATED CONNECTORS THROUGH MIL-STD-202, METHOD 302.
 3. MECHANICAL CHARACTERISTICS:
 - 3-1. DURABILITY: 5000 CYCLES.
 - 3-2. OPERATING TEMP. RANGE: -25°C TO 85°C. [INCLUDING TERMINAL TEMP. RISE]
 - 3-3. STORAGE TEMP.: -40°C TO 85°C.
 4. Solder ability: 255±5°C. 5±0.5s.



深圳市华宇创精密电子有限公司


TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	TF PUSH 内焊 1.45H	
X.XX ±0.25					
X.XXX ±0.15					
X: ±2° X.X ±0.5°		CHECKED BY:	DATE :	PART NO.	HYC24-TF08-145
		马跃	2014-02-23	MOLD NO.	
				APPROVED BY:	DATE :
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1

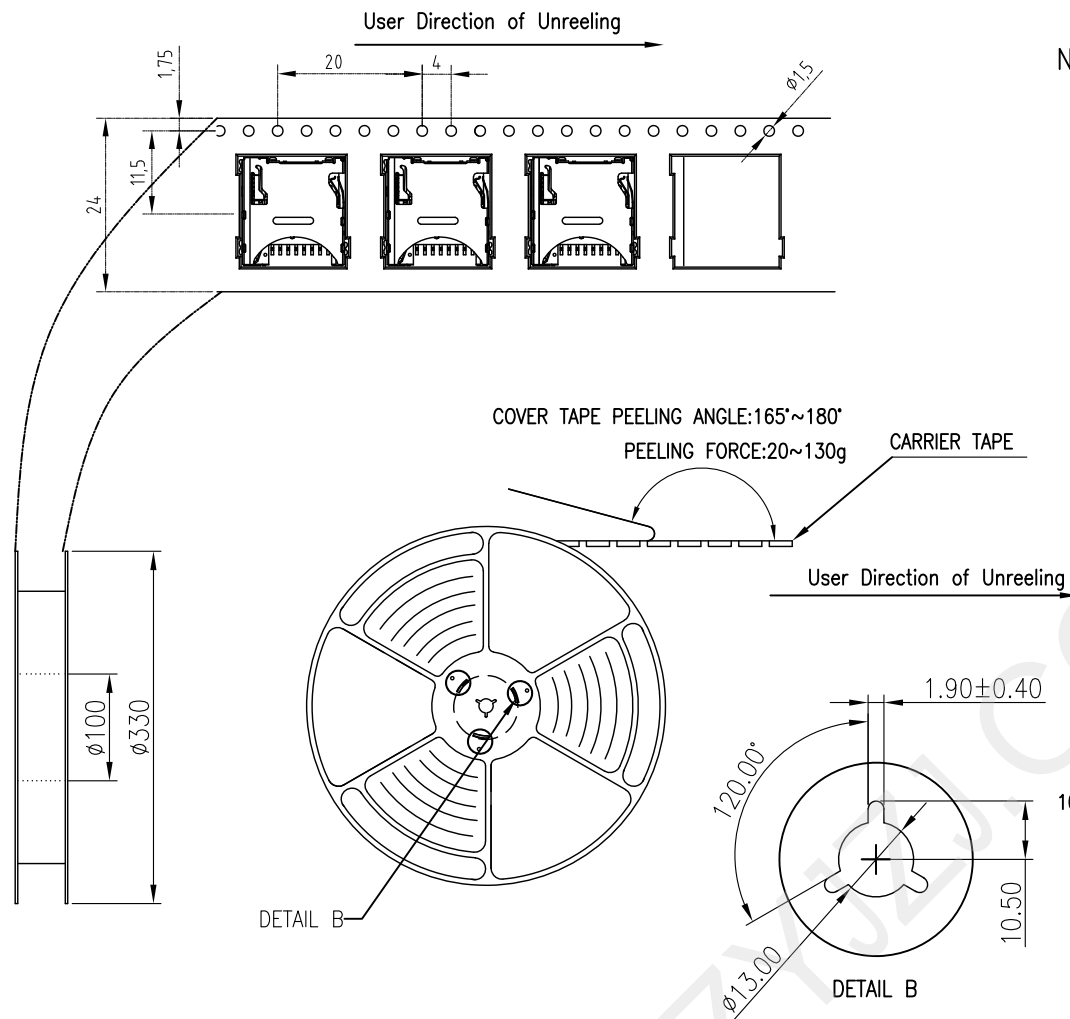


NOTES

1. NUMBER OF CONNECTORS:1500PCS/REEL

2. LEAD TAPE LENGTH

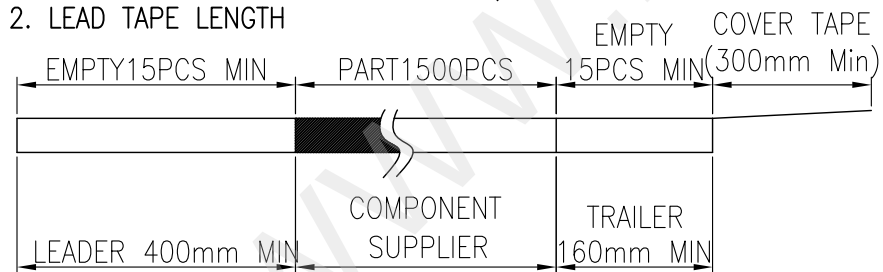

3. QUANTITY:15000PCS/CARTON

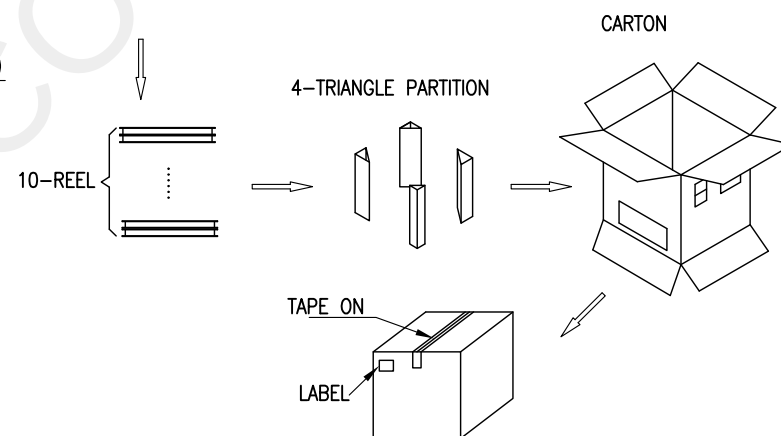

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1