
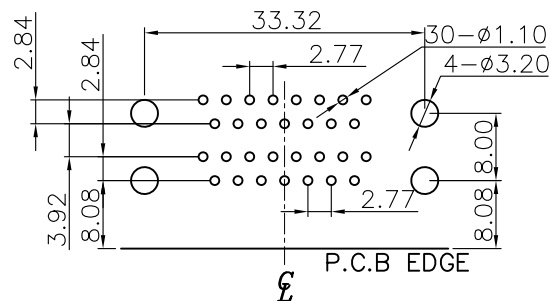
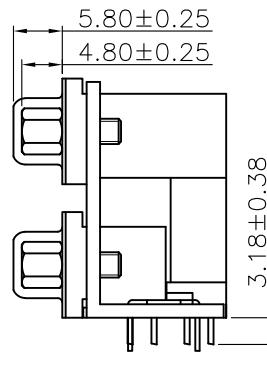


SPECIFICATIONS

1. D-SUB
 - 1.1 Voltage: 250 VAC(RMS) Max.
 - 1.2 Current Rating: 3 Ampere per Contact
 - 1.3 Contact Resistance: 25 Milliohms Max.
 - 1.4 Insulation Resistance: 5000 Megohms Min.
 - 1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
 - 1.6 Total Mating Force: 9.4 Kgf Max.
 - 1.7 Total Unmating Force: 1.4 Kgf Min.
 - 1.8 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
Screw:Copper Alloy.
2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Tin Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
Screw:Nickel Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

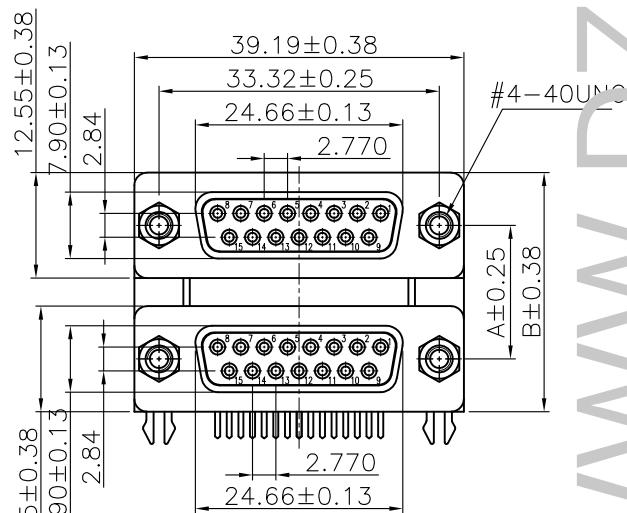

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°

UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

DR15母 对 DR15母 铆锁

PART NO.

HYC244-VGA30B-XXX

MOLD NO.

DRAW NO:

HYC-2510100951

SHEET NO.

1 OF 1

DIMA	DIMB
15.88	28.43
19.05	31.60