
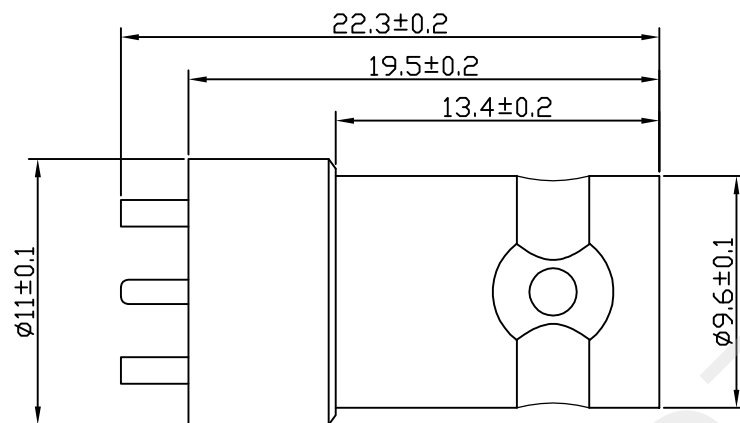
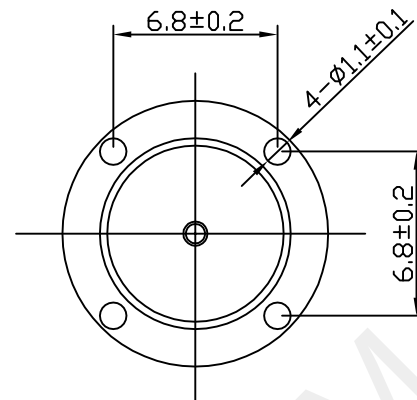


PCB板

技术要求:

- 特性阻抗 50Ω
- 频率范围 0-3GHz
- 接触电阻 内导体≤30mΩ
外导体≤30mΩ
- 绝缘电阻 ≥5000MΩ
- 介质耐压 1500V电流0.5mA AC/1min
- 分离力 10-25N
- 外观: 无斑点 毛刺 划痕 表面光亮无脏污 无变形等

1	216铜座	1	黄铜	镀镍
2	216母针	1	黄铜	镀金
3	322绝缘体1	1	PTFE	
4	322绝缘体2	1	PTFE	
5				
序号	名称	数量	材料	备注

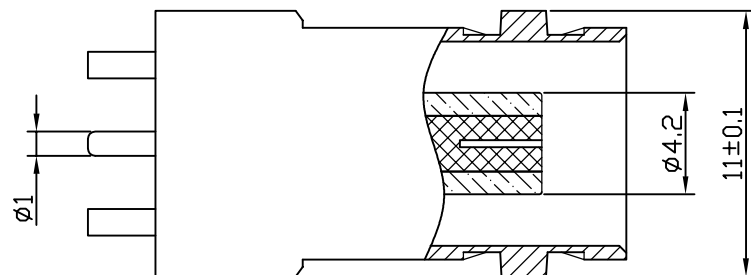

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

BNC 180° DIP 圆11 H22.3

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC27-BNC110-2230

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2209151132

SHEET NO.

1 OF 1