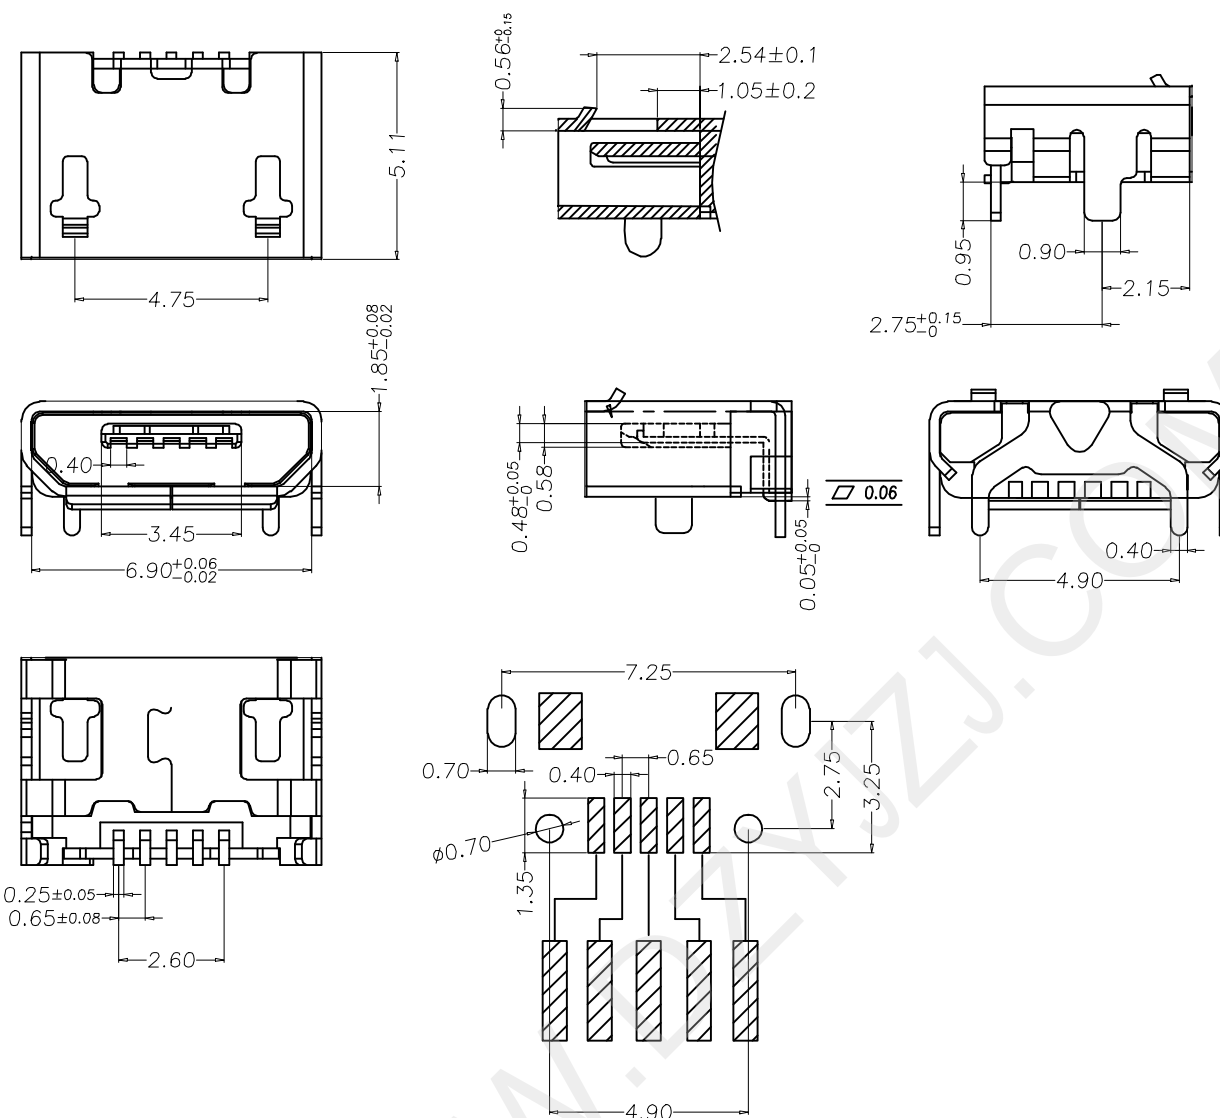
**规格说明: Specifications:****电气特性: Electrical:**

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.0kgf (MAX)
Unmate force: 0.7kgf (MIN)
2. 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Ternoplastics,
UI 94V-0 LCP Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: SUS 304

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating (能过炉自动上锡)



深圳市华宇创精密电子有限公司

TOLERANCE: X.X $\pm$ 0.30 X.XX $\pm$ 0.25 X.XXX $\pm$ 0.15 X.' $\pm$ 2" X.X" $\pm$ 0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO USB 小牛角无卷边	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC317-USBD05-490	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2211011534	SHEET NO. 1 OF 1