

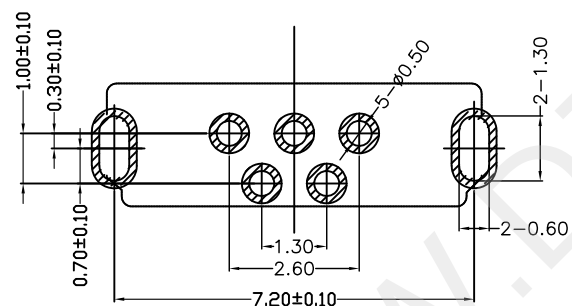
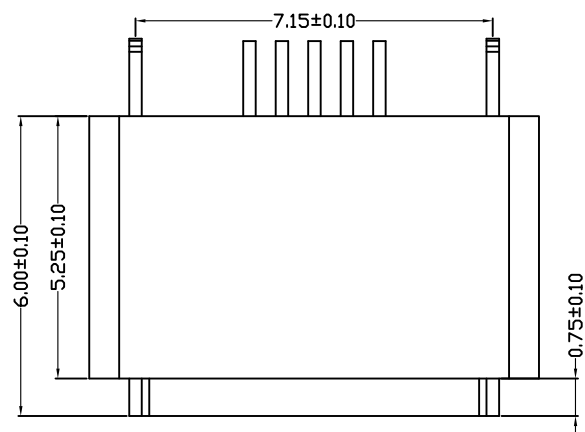
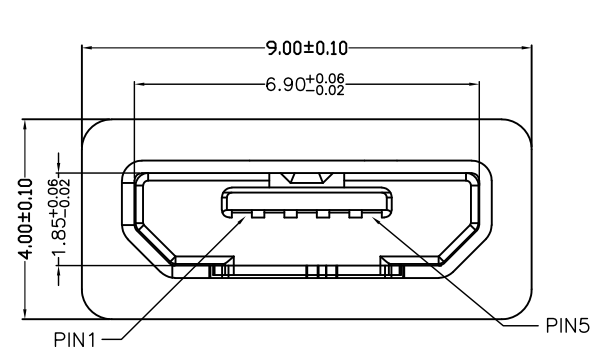


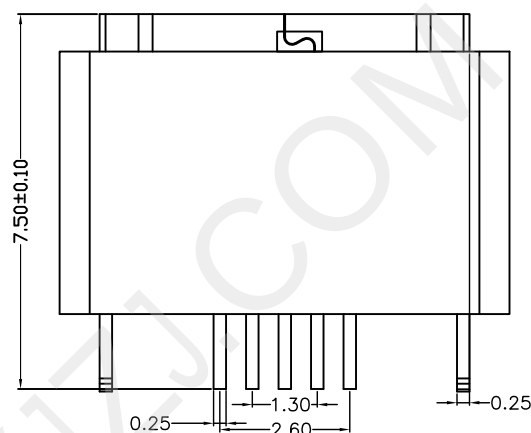

RECOMMENDED PCB LAYOUT

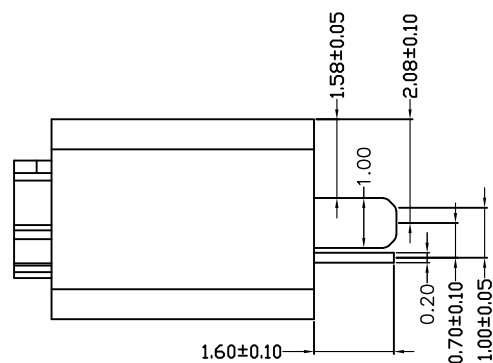

- 1 VBUS Red
2 D- White
3 D+ Green
4 ID <Ra_PLUG_ID
5 GND Black

备注:

1. 产品规格:

- 1-1. 插入力: 35N MAX.
1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER
1-3. 额定电流: 1.0A
1-4. 额定电压: 30V
1-5. 耐久性: 10000 CYCLES MIN.
1-6. 耐电压: 100V AC MIN.
1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER
1-8. 绝缘电阻: 100MΩ MIN
1-9. 工作温度: -30° TO +80°

2. 材质:

- 2.1 胶芯: LCP UL94V-0
2.2 端子: C2680R-H, 镍底, 镀金1μ"
2.3 外壳: SUS201/301, 表面镀雾锡/镀镍

3. 重点尺寸标识"▲"符号



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO USB 5P B口 180° 直插防水半包
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC320-USB05-755
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2303021533
			SHEET NO. 1 OF 1