




ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN

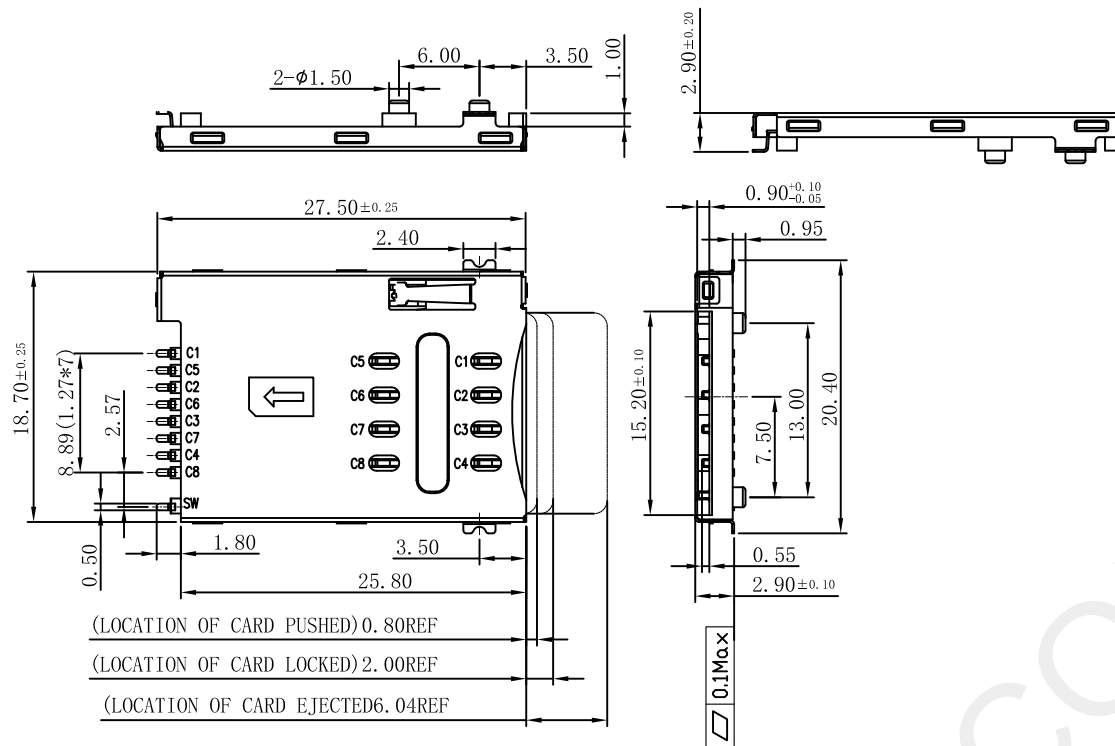

NOTES:

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.

Contact: Copper Alloy

CD PIN: Copper Alloy

Shell: STAINLESS

Electrical:

Current Rating :0.5mA AC/DC max.


Voltage Rating :10V AC/DC

Ambient Temperature Range : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Storage Temperature Range : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Ambient Humidity Range :95% R.H. Max.


Contact Resistance:100m Ω max.Insulation Resistance:1000M Ω min./500VDC

Mating Cycles:5,000 Insertions

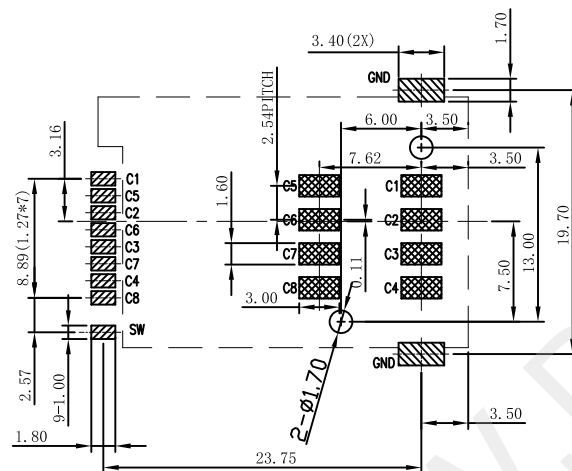Temperature: $260^{\circ}\text{C} \pm 5^{\circ}$ 


深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X" ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SIM PUSH 8+1P 2.9H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC324-SIM09-290
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO: HYC-2208291838
			SHEET NO. 1 OF 1


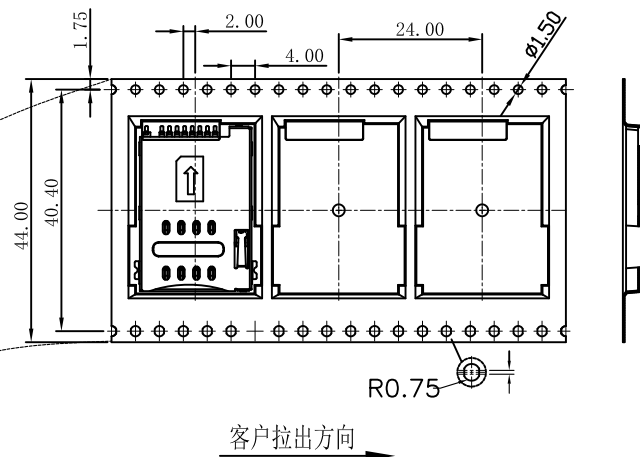


NOTES



1. 每卷包装数量:600PCS/每卷
2. 卷带包装方式:

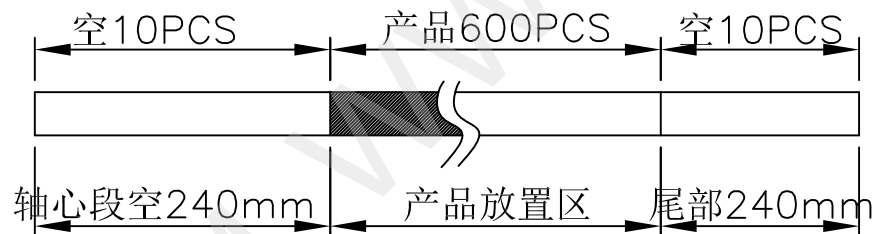


3.每箱包装数量:3600PCS/箱

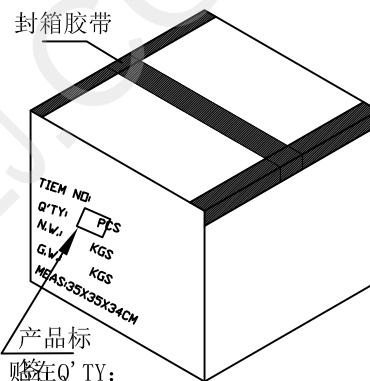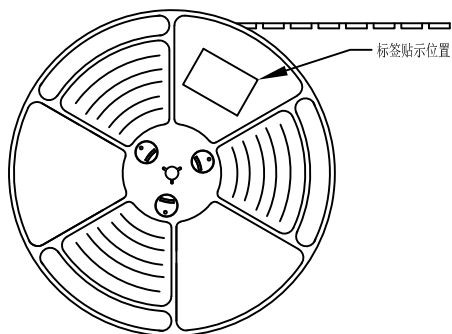

产品标
贴在Q' TY:
和PCS字的
中间

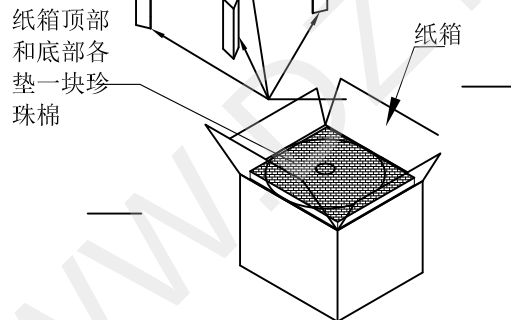

 深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图
 UNIT: mm [inch]	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.
SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:
		SHEET NO. 1 OF 1	