
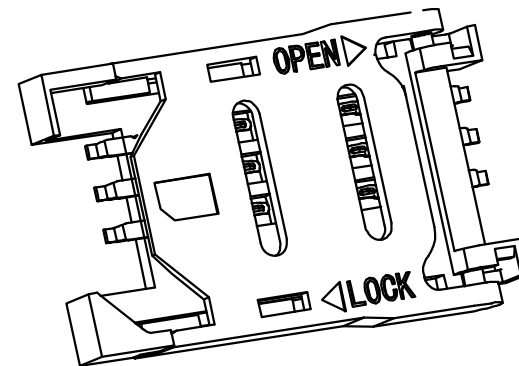
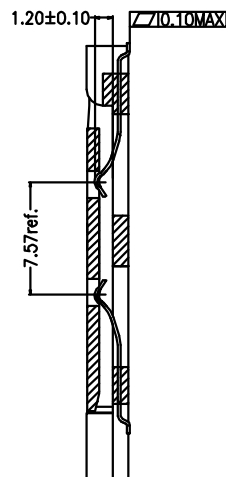

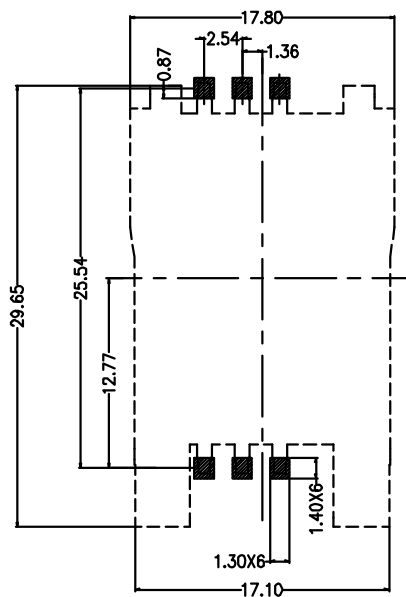


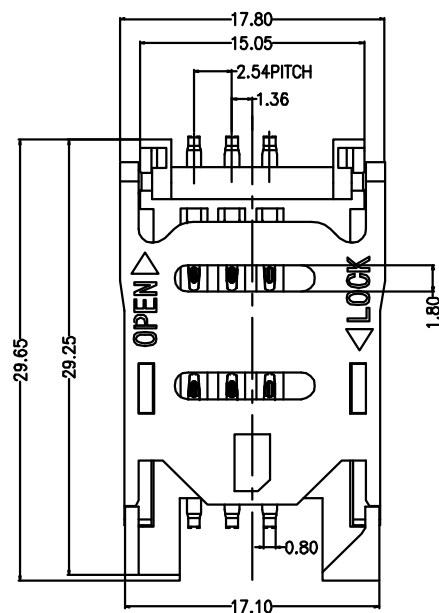

A.Material:

- 1.Insulator:High temperature thermoplasti
UL94V-0,(BLACK LCP)
- 2.Pho.Bronze:Plating,
50U" MIN NICKEL UNDERPLATED;
GOLD ON THE CONTACT AREA;
100U" TIN PLATING ON SOLDER TAIL

B.Electrical specifications:

- Voltage rating: 10 V AC
Current rating: 0.5A
Dielectric strength: 500V AC for 1
minute min
Insulation resistance: 1000 M ohm
Contact resistance: 100 mill.ohm max
Operation temperature: -25℃ to +95℃
Product withstanding rff low
soldering 260℃ for 10s

C.Mechanical speicieations:

- 3.1 Durabilitv: 5000 cvcles



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SIM 6PIN 全塑掀盖无柱	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC327-SIM06-280	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2211031815	SHEET NO. 1 OF 1