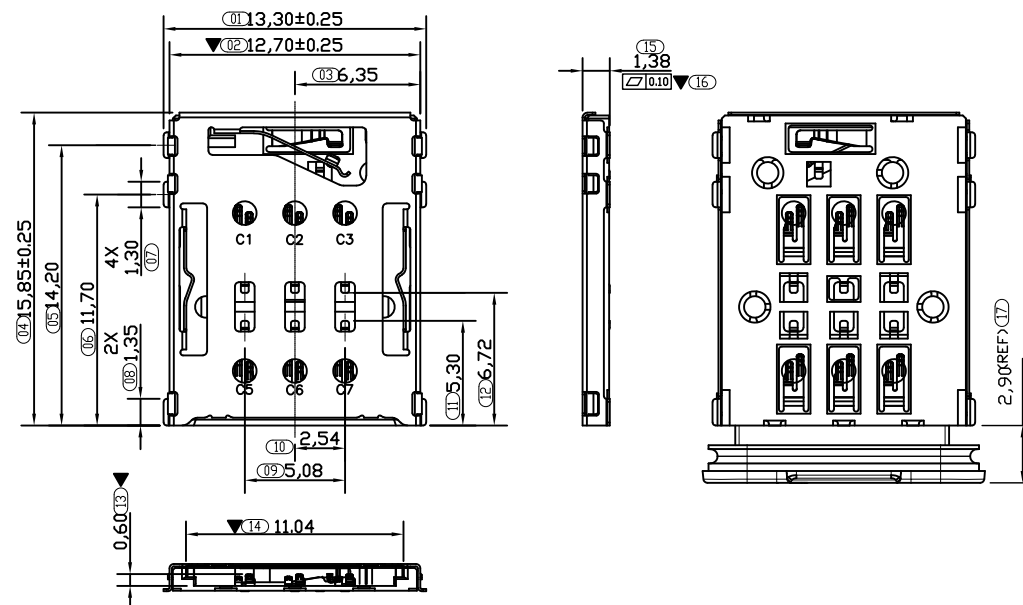


1.General Characteristics

TRAY MATING FORCE:2~10N

TRAY UNMATING FORCE:4~10

2. Electrical Characteristi

Contact resistance: 50mΩ typ
100mΩ max

Insulation

Vapor phase: 215°C 30 sec Max


IR reflow:260°

4.Environmental Characteris:

Operating temperature: -40°C~+85°C
Relative humidity: 10%~95%RH



PART NAME	Q'TY	MATERIAL
-----------	------	----------

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	Hi-temp Thermoplastic	Black UL94V-0
2	CONTACT	1	Copper Alloy	Contact area:Gold plated
3	SHELL	1	Stainless Steel	Solder area:Gold plated

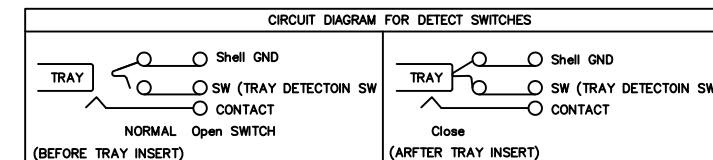

深圳市华宇创精密电子有限公司


TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	NANO SIM CARD 1.38H 7PIN 卡托式	
X.XX ±0.25					
X.XXX ±0.15					
X.* ±2* X.X* ±0.5*		CHECKED BY:	DATE :	PART NO.	HYC329-SIM07-138
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]				APPROVED BY:	DATE :
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1

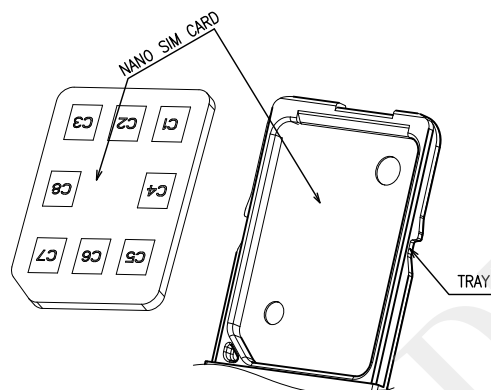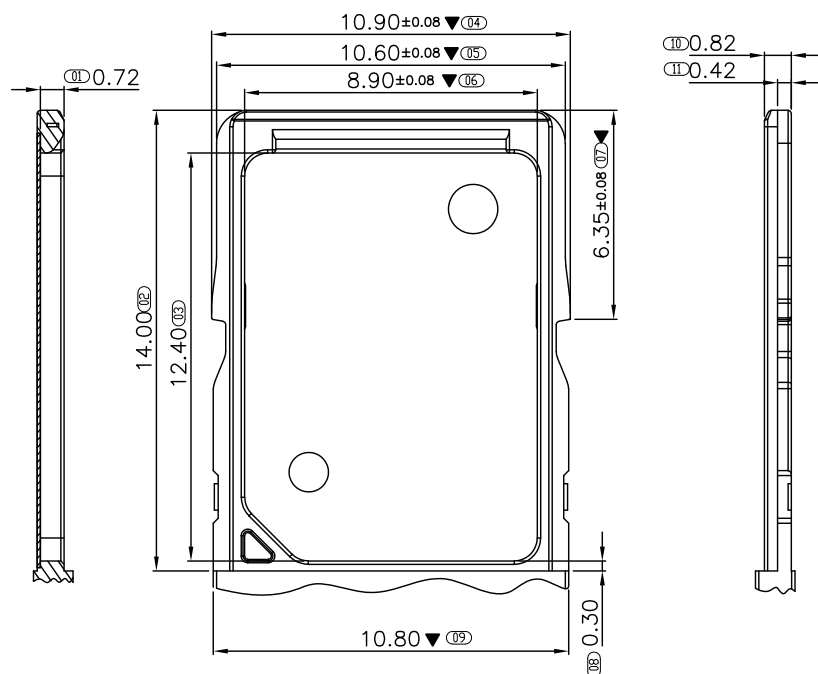


卡片放置方向

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	Polycarbonate	Black UL94V-0
2	SHELL	1	Stainless Steel	PLATING:Rinse


TABLE:

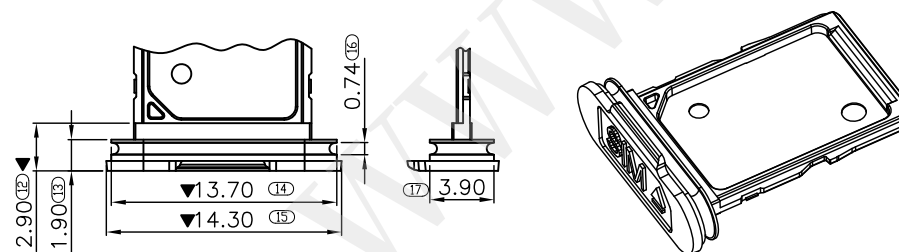

防水卡托

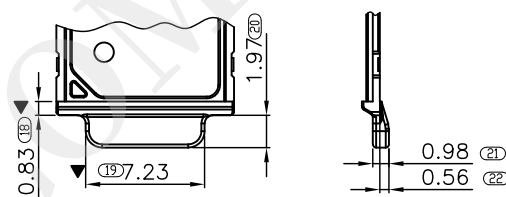

普通卡托

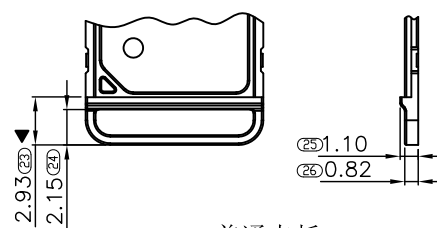

普通卡托



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5' UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 卡托
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-029
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2211071535
			SHEET NO. 1 OF 1

