
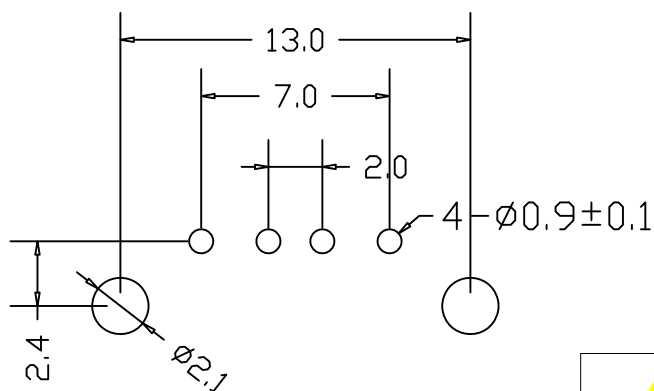
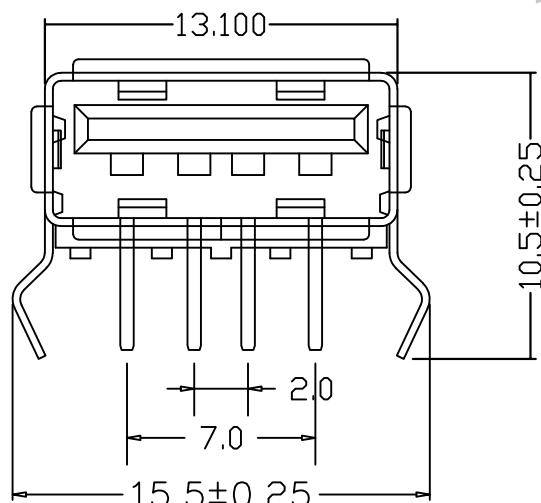
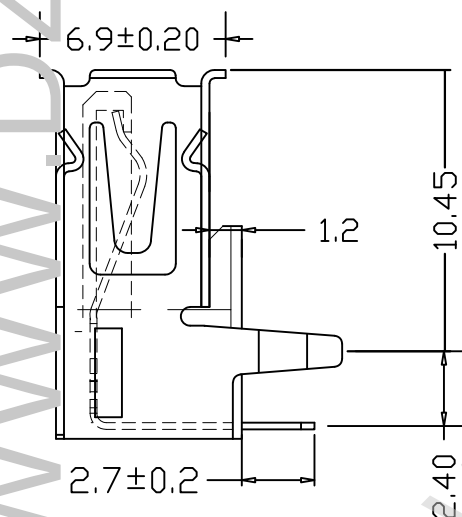


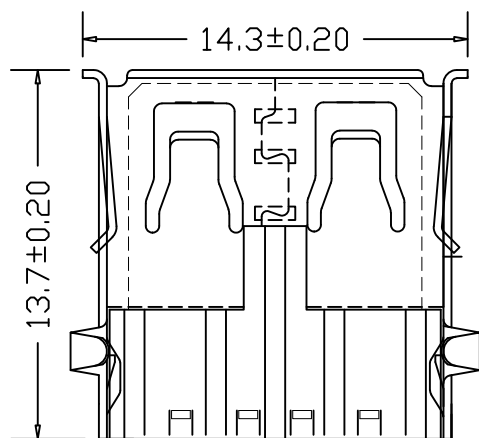

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Thermaplastics,
2. 端子>Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子>Contact: Plated Gold in Mating Area;
Tin On Solder Talls

端子四周镀50U" (MIN) 锡, 镀金区域镀100-200U"镀金1U"

2. 外壳:Shell:
铁壳四周镀80U" (MIN) 镍
Nickel Plating



深圳市华宇创精密电子有限公司

TOLERANCE: XX ±0.30 XX ±0.25 XXX ±0.15 X° ±2° X.X° ±0.5°	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB AF 90° DIP T型弯脚 有卷边无后盖
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC350-USBA04-143
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2509180952
			SHEET NO. 1 OF 1