
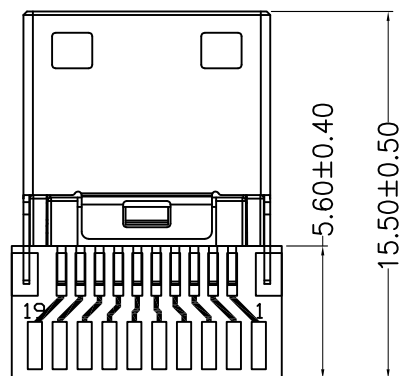


NOTES:

1. 插入力:7N-25N.
2. 拔出力:44.1N MAX.
3. 耐久性:5000 CYCLES MIN.
4. 工作温度: -20℃ T0 +85℃
5. 外观不得有缩水、缺胶、毛边、变形等不良。
6. 标有△为重点尺寸。
7. 材质: 壳体:SPCC&H65, 端子:C5191,
塑胶主体: LCP+30%G. F UL94V-0.
8. 电镀: 外壳镀镍80U"-120U" & 镀金G/F
端子镀半金锡 接触点镀金G/F.
9. 盐雾: 24H.

2	内连接	PCB板 T=1.60MM	1PCS
1	连接器	HDMI MINI CM 壳体镀镍&镀金G/F PIN针镀金G/F	1PCS
序号	名 称	材 料	用量

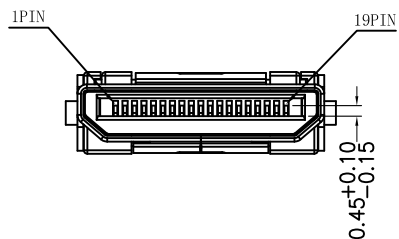

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDMI C TYPE 公座带板 19+1	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC37-HDMIC19-100	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2210071733	SHEET NO. 1 OF 1