

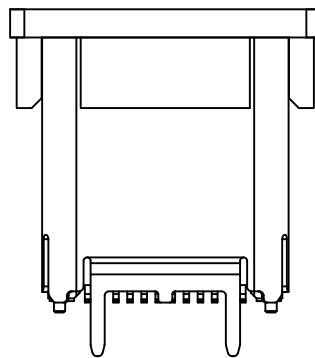
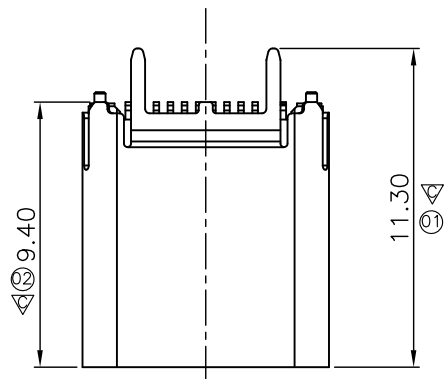
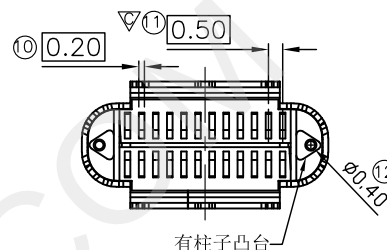


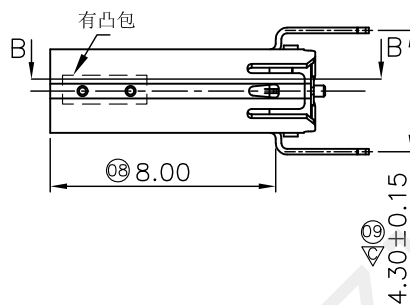

加CAP示意图



NOTES:

1.MECHANICAL:

INSERTION:5~20 N

EXTRACTION:THE INITIAL 8~20N.

6~20N AFTER DURABILITY

DURABILITY: 10000 CYCLES

2.ELECTRICAL:

CURRENT: 5A MAX

VOLTAGE: 30V MAX

WITHSTANDING VOLTAGE: 100V AC.

CONTACT RESISTANCE: 40 mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.

3.ENVIRONMENTAL

TEMPERATURE RANGE -55°C ~ +85°C

4. THE MARK " "DIMENSIONS SHOULD BE CONTROLLED BYFAI.

5. THE MARK " "DIMENSIONS SHOULD BE CONTROLLED BY QIP.

6.THE MARK " "DIMENSIONS SHOULD BE CONTROLLED BY CPK.

7. PRODUCT MEET FOR ROHS STANDARD.

TABLE:

ITEM	PART NAME	Q'TY	Material
1	CONTACT	12	C18140-H,T=0.12,GOLD 30u"Min. NICKEL 80u"Min.MT 120u"
2	CONTACT	12	C18140-H,T=0.12,GOLD 30u"Min. NICKEL 80u"Min.MT 120u"
3	MID-PLATE	1	SUS301R-H T=0.15, Cleaning.
4	EMI PAD	1	SUS304-1/2-H, T=0.10, Cleaning.
5	SHELL	1	STAINLESS STEEL, NICKEL 50u"Min.
6	OVER-MOLDING	1	LCP, UL94V-0,BLACK
7	CAP	1	PA9T, UL94V-0,BLACK



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X.' ±2' X.X' ±0.5'

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

USB TYPE C 母座24P立式SMT H=9.4

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC380-USBC24-940

APPROVED BY:

邱敏

DATE :






2014-02-23

DRAW NO:

HYC-2209151144

SHEET NO.

1 OF 1

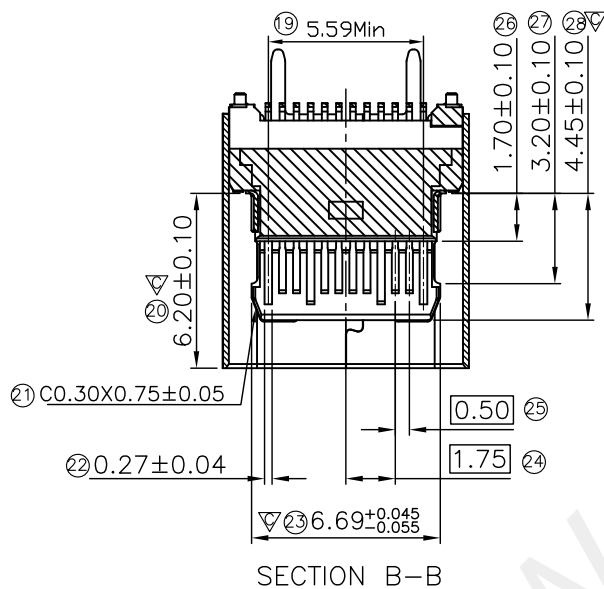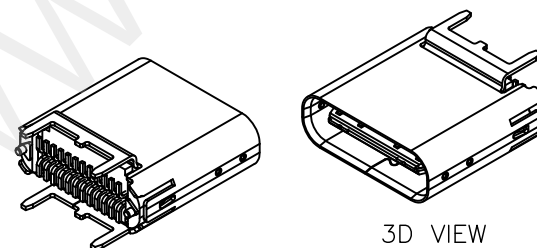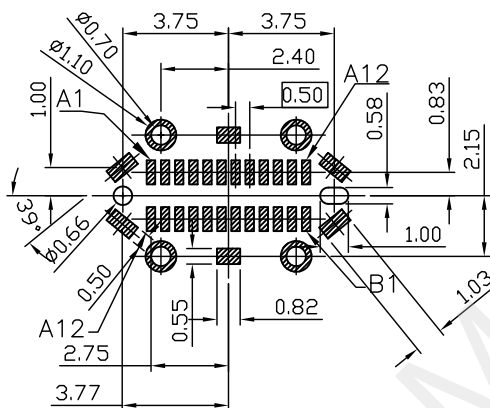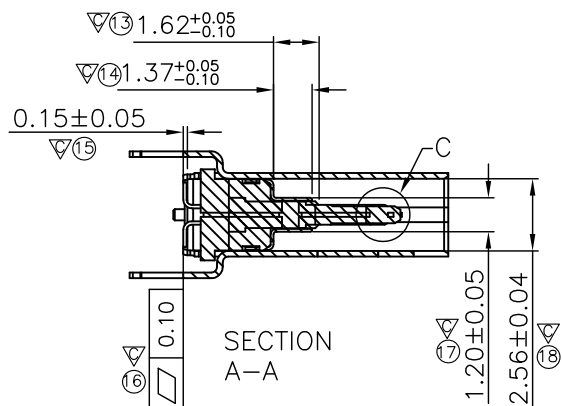

B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X" ±0.5"	DRAWN BY :	DATE :	PART NAME:
	陈一鸣	2014-02-23	USB TYPE C 母座24P立式SMT H=9.4
	CHECKED BY:	DATE :	PART NO.
	马跃	2014-02-23	HVC380-USBC24-940
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY:	DATE :	DRAW NO:
	邱敏	2014-02-23	HVC-2209151144
			SHEET NO.
			1 OF 1