

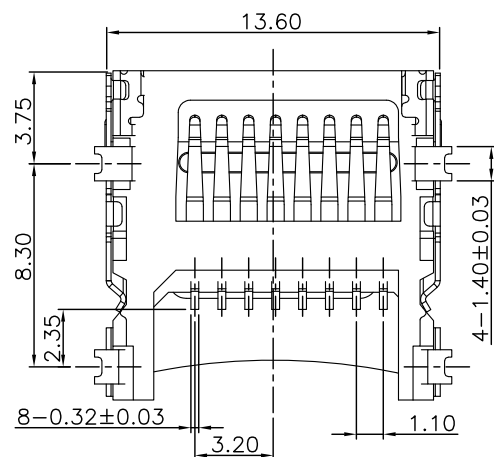

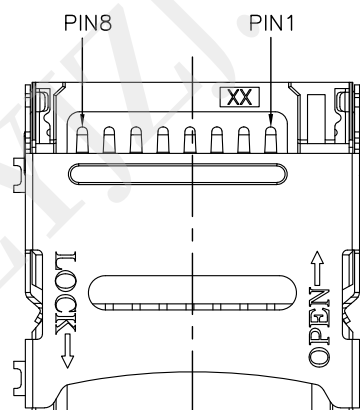
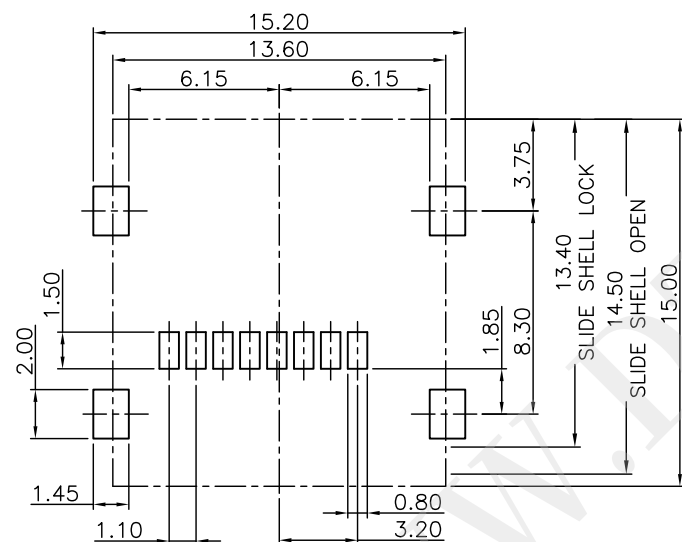


SLIDE SHELL OPEN



SLIDE SHELL LOCK

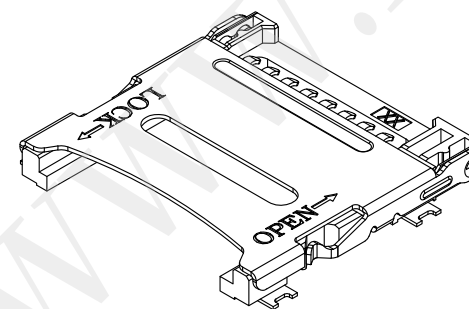

MATERIALS

1. HOUSING : HI-TEMP PLASTIC UL 94V-0.

2. TERMINAL: COPPER ALLOY.

PLATING: GOLD PLATED ON CONTACT AREA,
G/F GOLD PLATED ON SOLDER TAILS.

3. SHELL : STAINLESS STEEL.

PLATING : 50u" NICKEL UNDER, 100u" TIN OVERALL.

SPECIFICATION

1. CURRENT RATING : 0.5A MAX.

2. DIELECTRIC WITHSTANDING VOLTAGE :

500V AC R.M.S. FOR 1 MINUTE.

3. INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.

4. CONTACT RESISTANCE : 50mΩ MAX.

SWITCH RESISTANCE : 100mΩ MAX.

5. DURABILITY : 5000 CYCLES.

6. OPERATING TEMPERATURE : -30° C TO +85° C.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: TF 掀盖 1.8H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC39-TF08-180
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HVC-2303032103
			SHEET NO. 1 OF 1