

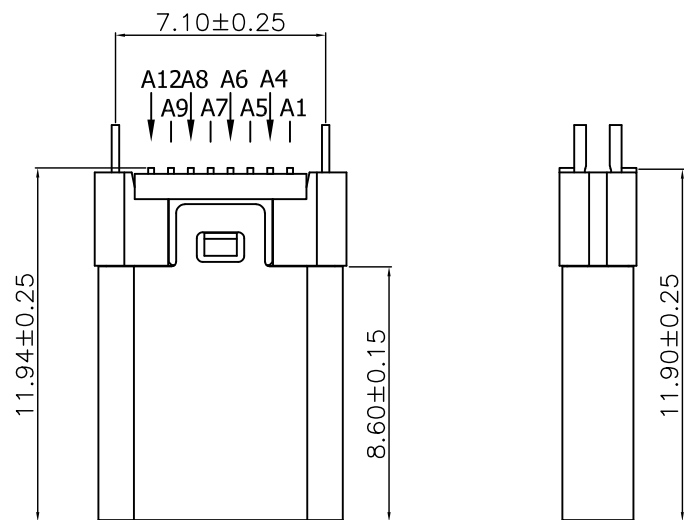



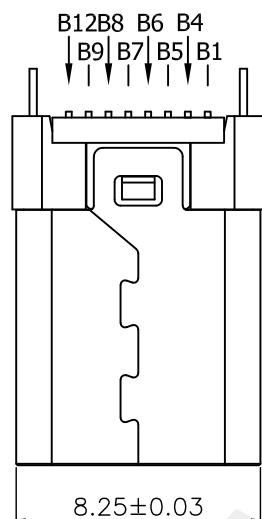

2.40±0.03

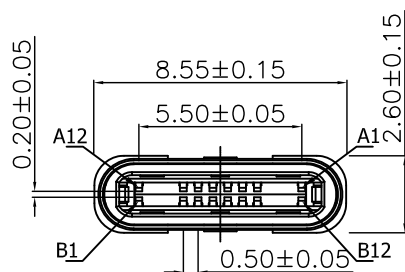

USB TYPE C 接线示意图

A4、A9、B9、B4	V
A5	
B5	
A1、A12、B1、B12	G
A6	D+
A7	D-
(R1=56KΩ R3=56KΩ) 5%	

NOTES:

1.MECHANICAL:

MATING FORCE: 5-20N .

UNMATING FORCE: 8-20N .

DURABILITY: 10000 CYCLES MIN.

2.ELECTRICAL:

CURRENT: 5.0A MAX

VOLTAGE: 20V MAX

WITHSTANDING VOLTAGE: 100V AC

CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER

10000 CYCLES

3.ENVIRONMENTAL

OPERATING TEMPERATURE RANGE -30°C ~
+80°C

④	GND LATCH	1	STAINLESS STEEL	NICKEL PLATED OVERALL,TAB WITH LEAD FREE TIN ALLOY.
③	CONTACT	16	COPPER ALLOY	NICKEL UNDERPLATING OVER ALL,GOLD PLATING AT - CONTACT AREA,LEAD FREE TIN ALLOY AT TERMINATION.
②	SHELL	1	STAINLESS STEEL	CLEAN.
①	HOUSING	2	THERMOPLASTIC UL 94V-0	MOLDED COLOR:BLACK,white
NO.	DESCRIPTION	QTY.	MATERIAL	TREATMENT



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 公座16P 立式贴片H=11.94mm
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC398-USBC16-119
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2212131017
			SHEET NO. 1 OF 1