



注释:

1. 材料: 见材料清单
2. 通用特性:
 - 2.1 共面度: 0.10 Max.
 - 2.2 额定电流: 5A
 - 2.3 接触电阻: 40 Ω Min/ 绝缘电阻: 100M Ω Min
 - 2.4 耐电压: 100 伏交流
 - 2.5 力学特性: 初始插入力: 5~20N 拔出力: 8~20N
 - 2.6 耐久后拔出力: 6~20N
 - 2.7 耐久性: 10000次
3. 防水等级 IPX8

7	MID PLATE	1	SUS301	SOLDER NICKEL: 50U" MIN
6	TERMINAL	1	C18400	MATING SIDE:AU15U"; SOLDER TAIL:GOLD FLASH, 50u" NICKEL OVERALL.
5	SHELL	1	SUS304	SOLDER NICKEL: 50U" MIN
4	SOLDER PIN	1	SUS304	SOLDER NICKEL: 50U" MIN
3	SHELL HOUSING	1	PA46	BLACK
2	LIM	1	硅胶	BLACK
1	MAIN HOUSING	1	PA46	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
BILL OF MATERIAL				






Pin:


A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND





深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 防水母座24P 沉板双贴斜口CH0.4
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC399-USBC24-219
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO: HYC-2212131130
			SHEET NO. 1 OF 1

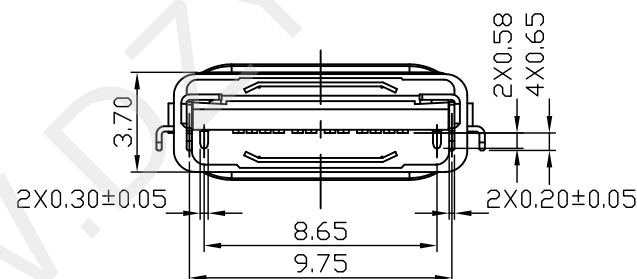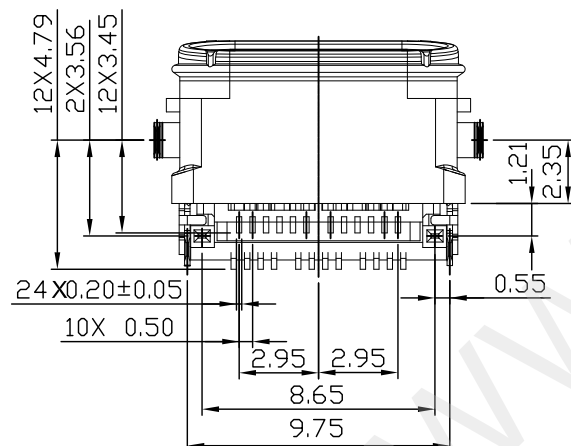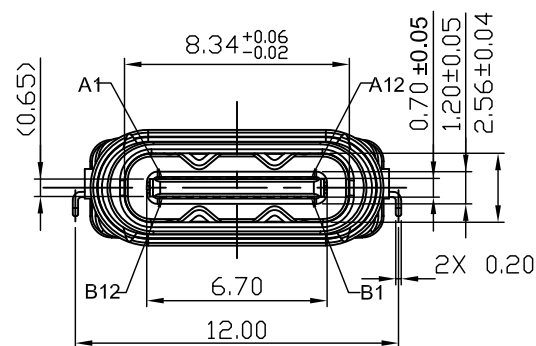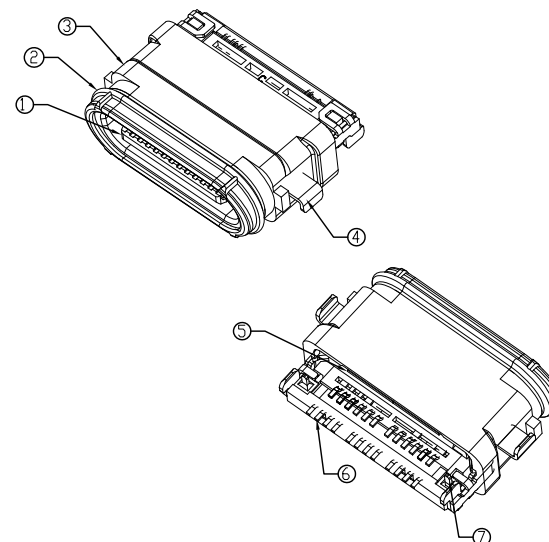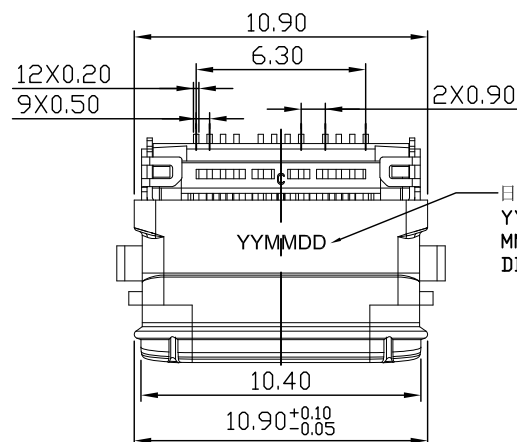

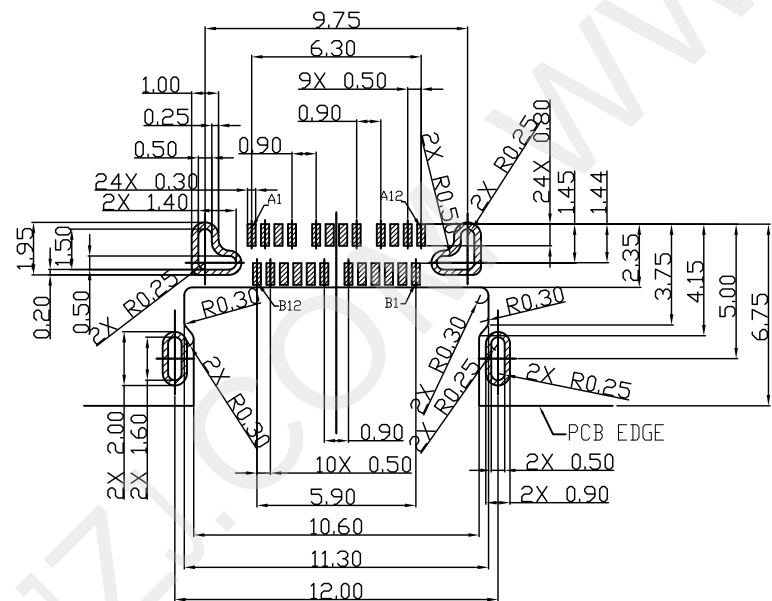

RECOMMENDED PCB LAYOUT
(Tolerance=±0.05)

 深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.* $\pm 2^{\circ}$ X.X $\pm 0.5^{\circ}$		DRAWN BY : DATE : 陈一鸣 2014-02-23	
 UNIT: mm [inch]		CHECKED BY: DATE : 马跃 2014-02-23	
		APPROVED BY: DATE : 邱敏 2014-02-23	
SCALE: 1:1 SIZE: A4		PART NAME: USB TYPE C 防水母座24P 沉板双贴斜口CH0.4	
		PART NO. HYC399-USBC24-219	
		MOLD NO.	
		DRAW NO: HYC-2212131130	
		SHEET NO. 1 OF 1	